


1. Body

Exploded View

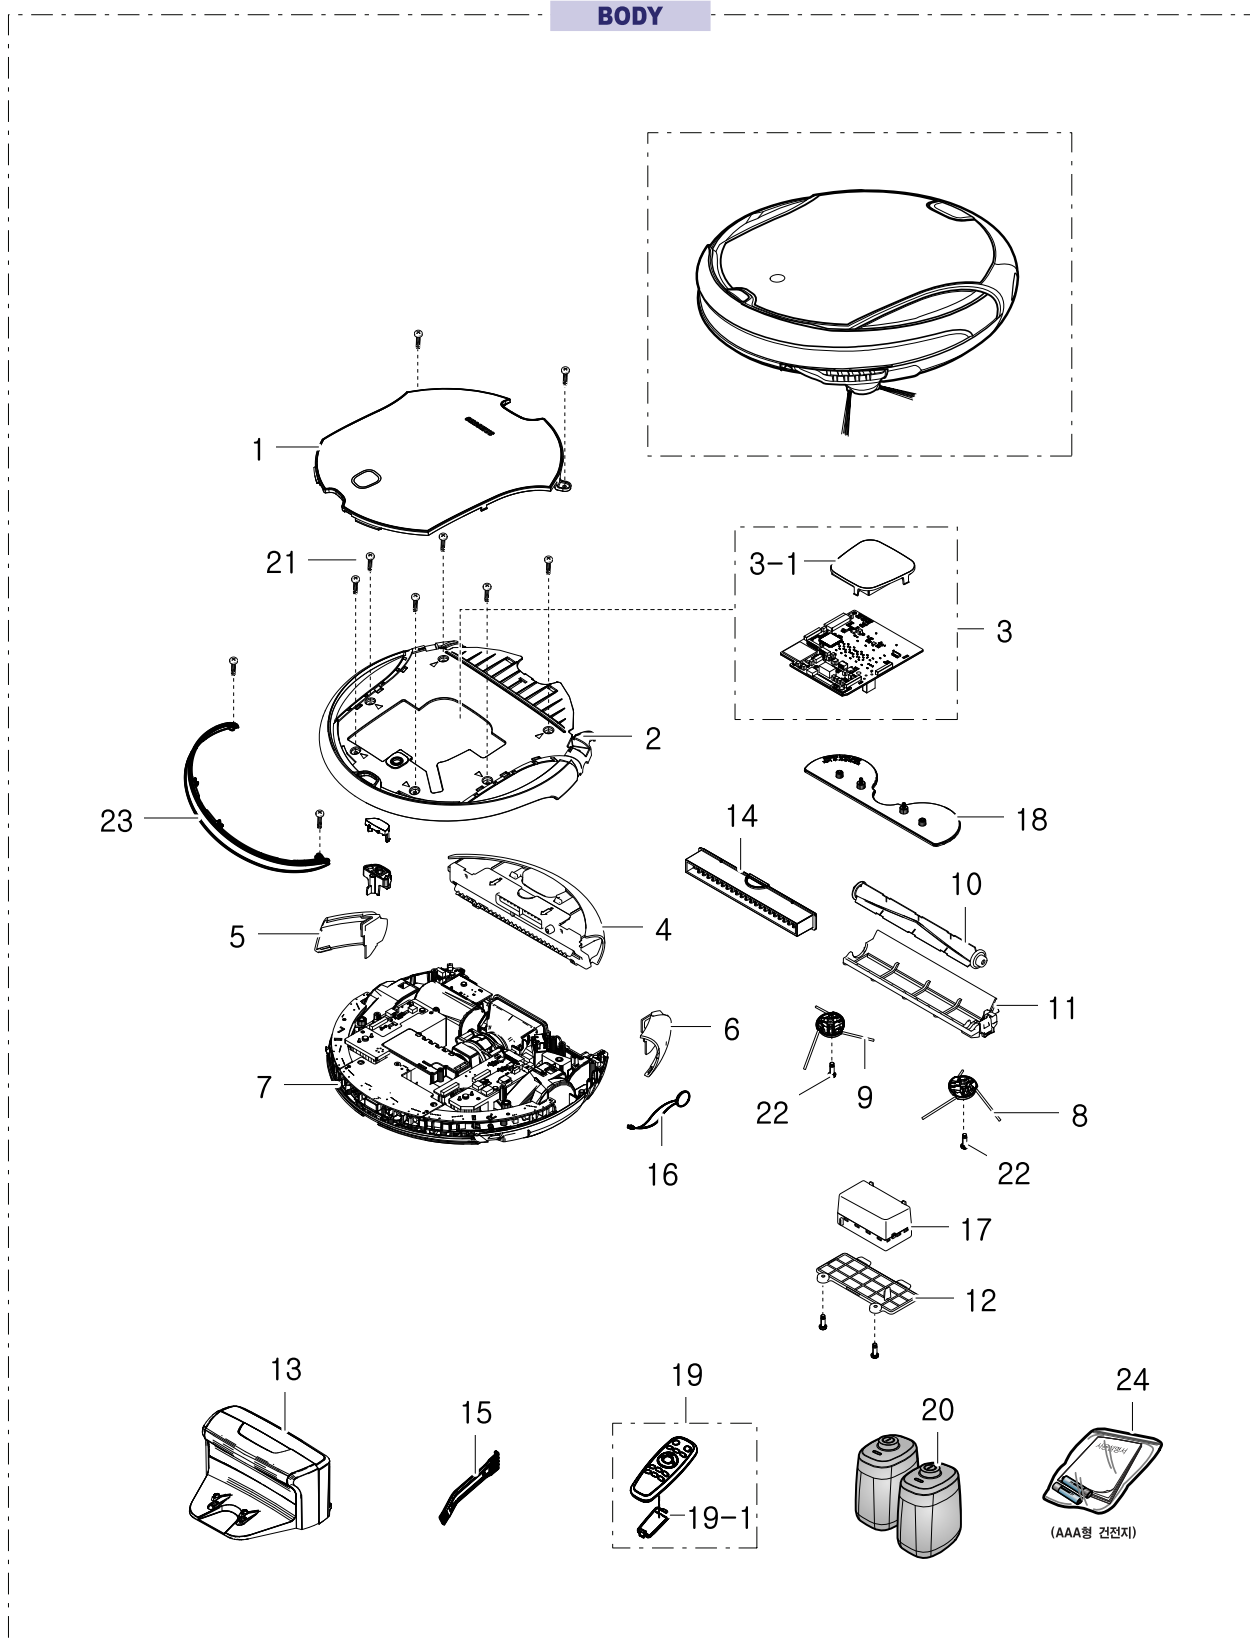


Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	1	RB042	DJ97-01795J	ASSY PANEL CONTROL; VR10F71UCAC,MECHANIC	SA	1
2	1	RB009	DJ97-01922A	ASSY BODY MID; VR10F71UCAV,EBONY BLACK,-,	SA	1
3	1		DJ92-00031B	ASSY PCB MAIN; MAIN,MAX_POP OUT,121X140,N	SA	1
3-1	2		DJ97-01794C	ASSY HOLDER-DISPLAY; SR8950,WHT	SA	1
4	1	RA013	DJ97-01796B	ASSY CASE BASKET; VC-RM84V,No,Bagfree,EPA	SA	1
5	1	RB127	DJ63-01200A	COVER SIDE-L; VC-RM84V,PC,SMOG BLK	SA	1
6	1	RB128	DJ63-01201A	COVER SIDE-R; VC-RM84V,PC,SMOG BLK	SA	1
7	1	RB002	DJ97-01921B	ASSY BODY BASE; VR10F71UCBC/ET,EBONY BLAC	SNA	1
8	1		DJ97-01928A	ASSY BRUSH CORNER-LEFT; VR10F71UCAV,-,COR	SA	1
9	1		DJ97-01929A	ASSY BRUSH CORNER-RIGHT; VR10F71UCAV,-,CO	SA	1
10	1		DJ97-01780D	ASSY DRUM BRUSH; SR8957,EURO YEL,BLACK	SA	1
11	1		DJ97-01804A	ASSY BASE BRUSH; VC-RM84V,YEL	SA	1
12	1		DJ63-01199A	COVER BATTERY; VC-RM84V,ABS,EBONY BLACK	SNA	1
13	1	RA014	DJ96-00149B	ASSY CHARGER; MAX-PJT,SUB GRY,EXP,230V,CP	SA	1
14	1	RA024	DJ97-01777B	ASSY GRILLE FILTER; VC-RM84V,BLUE,EPA10	SA	1
15	1	RA100	DJ98-01002A	ASSY ACCESSORY BROOM; VC-RE70V,BROOM,BLK,	SA	1
16	1	RJ174	DJ97-01427B	ASSY BUZZER; VC-RM52V,BUZZER/110mm/SMH200	SA	1
17	1	RA010	DJ43-00006B	ASSY BATTERY; VCR8940,Li-io,2200mAh,14.4v	SA	1
18	1		DJ67-00574B	CAP-SIDE BRUSH; VC-RA84V,PP,W108,L383,BLK	SNA	1
19	1	RA028	DJ96-00114Z	ASSY REMOCON; SR8950,EBONY BLK	SA	1
19-1	2	RP213	DJ63-00936D	COVER BATTERY; VCR-8830,ABS,EBONY BLK	SA	1
20	1	RA119	DJ97-01513D	ASSY-SMARTGATE; SR8950/SR8980,SMART GATE,	SA	2
21	1	RV005	6003-000171	SCREW-TAPTYPE; PH,+,NO,B,M4,L16,ZPC(WHT),	SNA	12
22	1	RV005	6003-000168	SCREW-TAPTYPE; PH,+, -,B,M3,L8,ZPC(WHT),SW	SNA	2

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
23	2		DJ64-01109A	WINDOW SENSOR; VR10F71UCAV,PC,346.5,184.2	SA	1
24	1		4301-000103	BATTERY-ALKALINE; 1.5V,750mAH,LR03,10.2x4	SNA	2

2. Assy Body Base

Exploded View

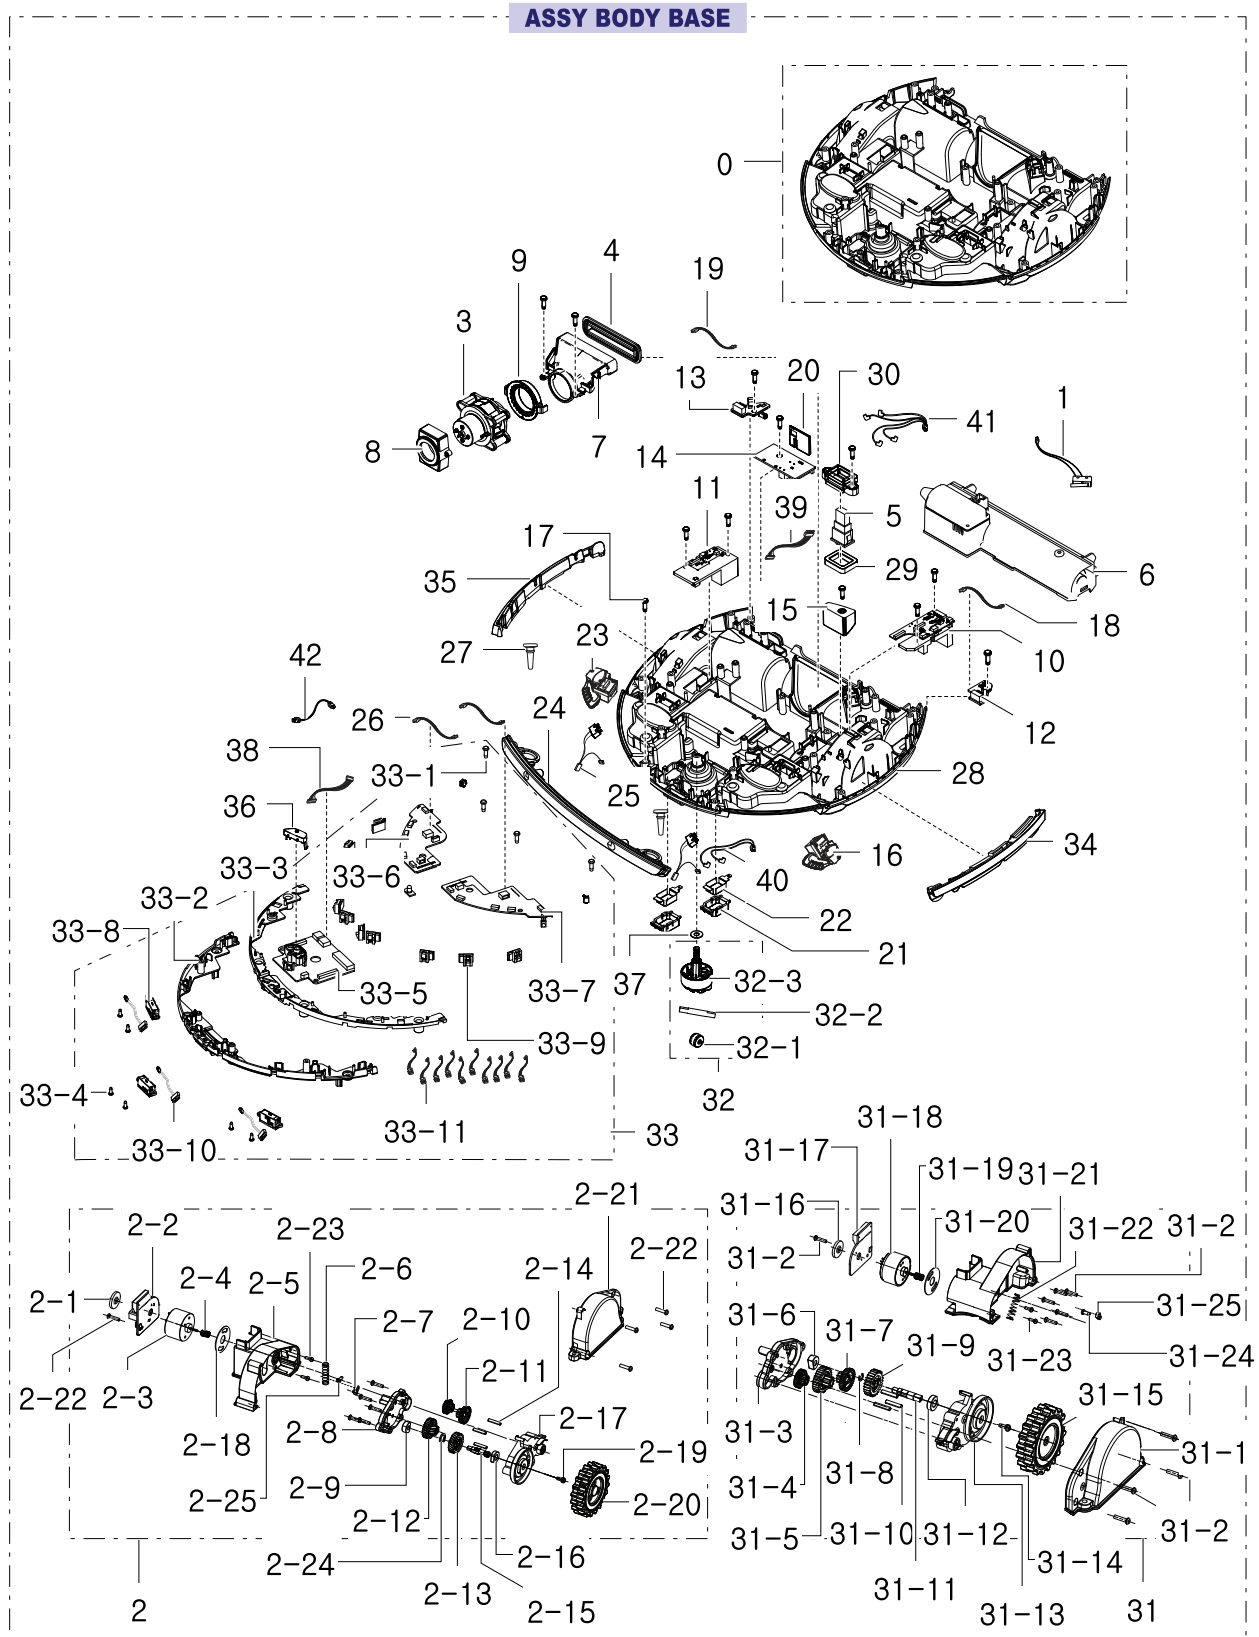

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	1	RB002	DJ97-01921B	ASSY BODY BASE; VR10F71UCBC/ET,EBONY BLAC	SNA	1
1	2	RP418	DJ91-00004D	ASSY SWITCH MICRO; VC-RA84V,DUSTBOX	SA	1
2	2	RB045	DJ97-01782A	ASSY WHEEL DRIVING L; WHEEL,VC-RM84V,EBON	SA	1
2-1	3		DJ61-01911A	MAGNET-FERRITE; VC-RM84V,MAGNET,H3.5,D19.	SNA	1
2-2	3		DJ41-00631A	PBA-WHEEL R; MAX,45X45,N	SNA	1
2-3	3		DJ31-00131A	MOTOR DC DRIVE; 8172RPM,43.2g*cm,14.4V,0.	SNA	1
2-4	3		DJ66-00664A	GEAR-PINION H; VC-RM84V,POM,0.4,12,D6.5,N	SNA	1
2-5	3		DJ61-01886B	CASE-WHEEL L; VC-RM84V,PC,T55,W56.5,L101.	SNA	1
2-6	3		DJ61-01972A	SPRING ETC-WHEEL; VC-RM84V,HSWR,CD0.8,ID6	SNA	1
2-7	3		DJ61-01912A	MAGNET-FERRITE WHEEL; VC-RM84V,MAGNET,W6.	SNA	1
2-8	3	RB110	DJ63-01175A	COVER-GEAR BOX L; VC-RM84V,PC,T22.8,W42.5	SNA	1
2-9	3		6601-002357	BEARING-OILLESS; ID4.5,OD12,L5.2,SBF1218,	SNA	1
2-10	3		DJ66-00594A	GEAR-A H; AUTOBOT,PBT,0.4,35,NTR,OD16.1,H	SNA	1
2-11	3	RJ115	DJ66-00523A	GEAR-B; VC-RA84V,POM,NTR,OD19.9	SNA	1
2-12	3	RJ116	DJ66-00524B	GEAR-C; VC-RL84V,PA66,BLK,OD23.1	SNA	1
2-13	3	RJ117	DJ66-00525A	GEAR-MAIN; VC-RA84V,POM,NTR,OD23.1	SNA	1
2-14	3	RB199	DJ66-00545A	SHAFT-GEAR BOX A; VC-RA84V,STAINLESS-STS3	SNA	1
2-15	3	RB200	DJ66-00546A	SHAFT-GEAR BOX B; VC-RA84V,SUM24L,L28,OD6	SNA	1
2-16	3		6601-002356	BEARING-OILLESS; ID6,OD13,L3.9,SBF1218,WH	SNA	1
2-17	3		DJ61-01888A	BASE-GEAR BOX L; VC-RM84V,PC,T15.6,W50.8,	SNA	1
2-18	2	RB045	DJ97-01782A	ASSY WHEEL DRIVING L; WHEEL,VC-RM84V,EBON	SA	1
2-19	3	RV005	6006-000130	SCREW-MACHINE; PH,+,WS,M3,L8,ZPC(WHT),SWR	SNA	1
2-20	3		DJ97-01781A	ASSY WHEEL; WHEEL,VC-RM84V,EBONY BLACK,LI	SA	1
2-21	3		DJ63-01173B	COVER-WHEEL L; VC-RM84V,PC,T55,W22.9,L110	SNA	1
2-22	2	RV005	6002-000380	SCREW-TAPPING; PH,+,-,2S,M3,L12,ZPC(WHT),	SNA	2
2-23	3	RV005	6006-000112	SCREW-MACHINE; PH,+,WS,M2.6,L8,ZPC(WHT),S	SNA	2

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
2-24	3		6044-001949	RING-C; ID4.75,OD6.99,T0.6,NTR,SK-5	SNA	1
2-25	2	RV005	6002-000630	SCREW-TAPPING; PH,+,NO,2S,M3,L8,ZPC(WHT),	SNA	4
3	2		DJ96-00150A	ASSY MOTOR-FAN; VC-RM84V,14V	SA	1
4	2	RB130	DJ66-00665A	DAMPER SUCTION; VC-RM84V,TPU,BLK	SA	1
5	2	RP309	3402-001040	SWITCH-ROCKER; 250VAC,10A,DPST,ON-OFF	SA	1
6	2	RL008	DJ97-01789A	ASSY CASE-DRUM; VC-RM84V,GRAY,No,-	SA	1
7	2	RB139	DJ67-00656A	DUCT-INLET; VC-RM84V,ABS,EBONY BLACK	SA	1
8	2	RJ035	DJ63-01195A	CUSHION-MOTOR B; VC-RM84V,TPV,BLK	SA	1
9	2	RJ038	DJ63-01196A	CUSHION-MOTOR F; VC-RM84V,TPV,BLK	SA	1
10	2		DJ41-00625A	PBA INTERFACE-LEFT; MAX,124.5X56,N,POWER	SA	1
11	2		DJ41-00626A	PBA INTERFACE-RIGHT; MAX,79X33,N,INTERFAC	SA	1
12	2		DJ41-00632A	PBA-REAR L; MAX,32X26,N	SA	1
13	2		DJ41-00633A	PBA-REAR R; MAX,32X26,N	SA	1
14	2		DJ41-00634A	PBA INTERFACE-DRUM; MAX,57X28,N	SA	1
15	2		DJ61-01008A	BASE-WEIGHT R; VC-RS60(H),BRASS/SMF4030	SA	1
16	2	RJ002	DJ97-01924A	ASSY CASE MOTOR; VR10F71UCAV,DARK GRAY,LE	SA	1
17	2	RV005	6002-001327	SCREW-TAPPING; PWH,+,1,M4,L12,ZPC(WHT),SW	SNA	1
18	2		DJ39-00211J	WIRE HARNESS-RECEIVER L; VC-RM84V,4P,WHT,	SA	1
19	2		DJ39-00211K	WIRE HARNESS-RECEIVER R; VC-RM84V,4P,WHT,	SA	1
20	2		DJ64-01068A	SHUTTER-CONNECTOR; VC-RM84V,ABS,CLEAR GRA	SA	1
21	2		DJ61-01570A	HOLDER-CHARGER PIN; VC-RA84V,ABS,SUB GRY	SA	2
22	2	RJ102	DJ65-00063A	TERMINAL-PIN; VC-RA84V,BRASS	SA	2
23	2	RJ002	DJ97-01925A	ASSY CASE MOTOR; VR10F71UCAV,DARK GRAY,RI	SA	1
24	2		DJ61-02013A	BODY BUMPER; VR10F71UCAV,ABS,-,EBONY BLAC	SA	1
25	2		DJ39-00223A	WIRE HARNESS-PBA; MAX_POP,UL1061,#26,1250	SA	2
26	2		DJ39-00224A	WIRE HARNESS-PBA; MAX_POP,UL1061,#22,SMH2	SA	2
27	2		DJ61-01879B	POLE-BRUSH; VC-RL87V,HBR,OD6,L13.3,GRAY,H	SA	2
28	2	RB051	DJ61-02016A	BODY BASE; VR10F71UCAV,ABS,-,EBONY BLACK	SA	1
29	2	RB090	DJ61-01955A	CAP-SWITCH; VC-RM84V,SILICON,TRP	SA	1


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
30	2		DJ61-01959A	HOLDER-SWITCH; VC-RM84V,ABS,EBONY BLACK	SA	1
31	2	RB046	DJ97-01783A	ASSY WHEEL DRIVING R; WHEEL,VC-RM84V,EBON	SA	1
31-1	3		DJ63-01172B	COVER-WHEEL R; VC-RM84V,PC,T55,W22.9,L110	SNA	1
31-2	3	RV005	6002-000380	SCREW-TAPPING; PH,+, -,2S,M3,L12,ZPC(WHT),	SNA	4
31-3	3	RB111	DJ63-01174A	COVER-GEAR BOX R; VC-RM84V,PC,T22.8,W42.5	SNA	1
31-4	3		DJ66-00594A	GEAR-A H; AUTOBOT,PBT,0.4,35,NTR,OD16.1,H	SNA	1
31-5	3	RJ116	DJ66-00524B	GEAR-C; VC-RL84V,PA66,BLK,OD23.1	SNA	1
31-6	3		6601-002357	BEARING-OILLESS; ID4.5,OD12,L5.2,SBF1218,	SNA	1
31-7	3	RJ115	DJ66-00523A	GEAR-B; VC-RA84V,POM,NTR,OD19.9	SNA	1
31-8	3		6044-001949	RING-C; ID4.75,OD6.99,T0.6,NTR,SK-5	SNA	1
31-9	3	RJ117	DJ66-00525A	GEAR-MAIN; VC-RA84V,POM,NTR,OD23.1	SNA	1
31-10	3	RB199	DJ66-00545A	SHAFT-GEAR BOX A; VC-RA84V,STAINLESS-ST53	SNA	1
31-11	3	RB200	DJ66-00546A	SHAFT-GEAR BOX B; VC-RA84V,SUM24L,L28,OD6	SNA	1
31-12	3		6601-002356	BEARING-OILLESS; ID6,OD13,L3.9,SBF1218,WH	SNA	1
31-13	3		DJ61-01887A	BASE-GEAR BOX R; VC-RM84V,PC,T15.6,W50.8,	SNA	1
31-14	3	RV005	6006-000130	SCREW-MACHINE; PH,+,WS,M3,L8,ZPC(WHT),SWR	SNA	1
31-15	3		DJ97-01781A	ASSY WHEEL; WHEEL,VC-RM84V,EBONY BLACK,LI	SA	1
31-16	3		DJ61-01911A	MAGNET-FERRITE; VC-RM84V,MAGNET,H3.5,D19.	SNA	1
31-17	3		DJ41-00630A	PBA-WHEEL L; MAX,45X45,N	SNA	1
31-18	3		DJ31-00131A	MOTOR DC DRIVE; 8172RPM,43.2g*cm,14.4V,0.	SNA	1
31-19	3		DJ66-00664A	GEAR-PINION H; VC-RM84V,POM,0.4,12,D6.5,N	SNA	1
31-20	3	RJ034	DJ63-01241A	CUSHION-MOTOR; VC-RM84V,NBR,0.7T,D31,60,B	SNA	1
31-21	3		DJ61-01885B	CASE-WHEEL R; VC-RM84V,PC,T55,W56.5,L101.	SNA	1
31-22	3		DJ61-01972A	SPRING ETC-WHEEL; VC-RM84V,HSWR,CD0.8,ID6	SNA	1
31-23	3	RV005	6006-000112	SCREW-MACHINE; PH,+,WS,M2.6,L8,ZPC(WHT),S	SNA	2
31-24	3	RV005	6002-000630	SCREW-TAPPING; PH,+,NO,2S,M3,L8,ZPC(WHT),	SNA	6

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
31-25	3		DJ61-01912A	MAGNET-FERRITE WHEEL; VC-RM84V,MAGNET,W6.	SNA	1
32	2		DJ97-01785B	ASSY ROLLER CASTER; BODY BASE,MPO,BLACK,T	SA	1
32-1	3	RP101	DJ66-70100A	ASSY ROLLER; VC550P,BLK,OD22/W14.0/ID4.4,	SA	1
32-2	3	RP294	DJ70-30110A	SHAFT ROLLER-B; VC-DOM,MSWR,L26,OD3.9,ZPC	SA	1
32-3	3		DJ97-01784A	ASSY HOLDER-BACK; VC-RM84V,EBONY BLACK	SNA	1
33	2		DJ97-01923A	ASSY CASE SENSOR; VR10F71UCAV,EBONY BLACK	SA	1
33-1	2	RV005	6003-000170	SCREW-TAPTYPE; PH,+,-,B,M4,L12,ZPC(WHT),S	SNA	2
33-2	3		DJ61-02015A	CASE SENSOR; VR10F71UCAV,ABS,-,EBONY BLAC	SNA	1
33-3	3		DJ61-02014A	GUIDE SENSOR; VR10F71UCAV,ABS,-,HB,HG-076	SNA	1
33-4	2	RV005	6002-000630	SCREW-TAPPING; PH,+,-,NO,2S,M3,L8,ZPC(WHT),	SNA	4
33-5	3		DJ92-00032A	ASSY PCB SUB; SENSOR CENTER,MAX_POP OUT,9	SA	1
33-6	3		DJ92-00034A	ASSY PCB SUB; SENSOR RIGHT,MAX_POP OUT,16	SA	1
33-7	3		DJ92-00033A	ASSY PCB SUB; SENSOR LEFT,MAX_POP OUT,165	SA	1
33-8	3	RP347	DJ32-00014A	SENSOR-DISTANCE; KIR5006C,VC-RA84V,5.0V,5	SA	3
33-9	3		DJ32-00018A	SENSOR; GP2Y0E03S,-10~+603.3V	SA	10
33-10	3		DJ39-00211C	WIRE HARNESS-CLIFF SENSOR; VC-RM84V,4P,WH	SA	3
33-11	3		DJ39-00222A	WIRE HARNESS-PBA; MAX_POP,UL1571,#30,07SR	SA	10
34	2		DJ63-01257A	BAND BODY-LEFT; VR10F71UCAV,TPV,BLACK	SNA	1
35	2		DJ63-01258A	BAND BODY-RIGHT; VR10F71UCAV,TPV,BLACK	SNA	1
36	2		DJ67-00654A	LENS-TOP; VC-RM84V,PC,SMOG BLK	SA	1
37	2	RP371	6044-000227	RING-E; ID5.0,OD11,T0.6,BLUEING,STC5	SA	1
38	2	RJ161	DJ39-00211A	WIRE HARNESS-SENSOR; VC-RM84V,32,BLK,#24,	SA	1
39	2		DJ39-00211B	WIRE HARNESS-DRUM I/F; VC-RM84V,11P,#22,S	SA	1
40	2		DJ39-00211D	WIRE HARNESS-CHARGER; VC-RM84V,4P,BRN/BLU	SA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
41	2		DJ39-00211E	WIRE HARNESS-MAIN SWITCH; VC-RM84V,4P,BRN	SA	1
42	2	RJ109	DJ39-00211H	WIRE HARNESS-POWER; VC-RM84V,4P,BRN/BRN/B	SA	1

3. Assy Case Basket

Exploded View

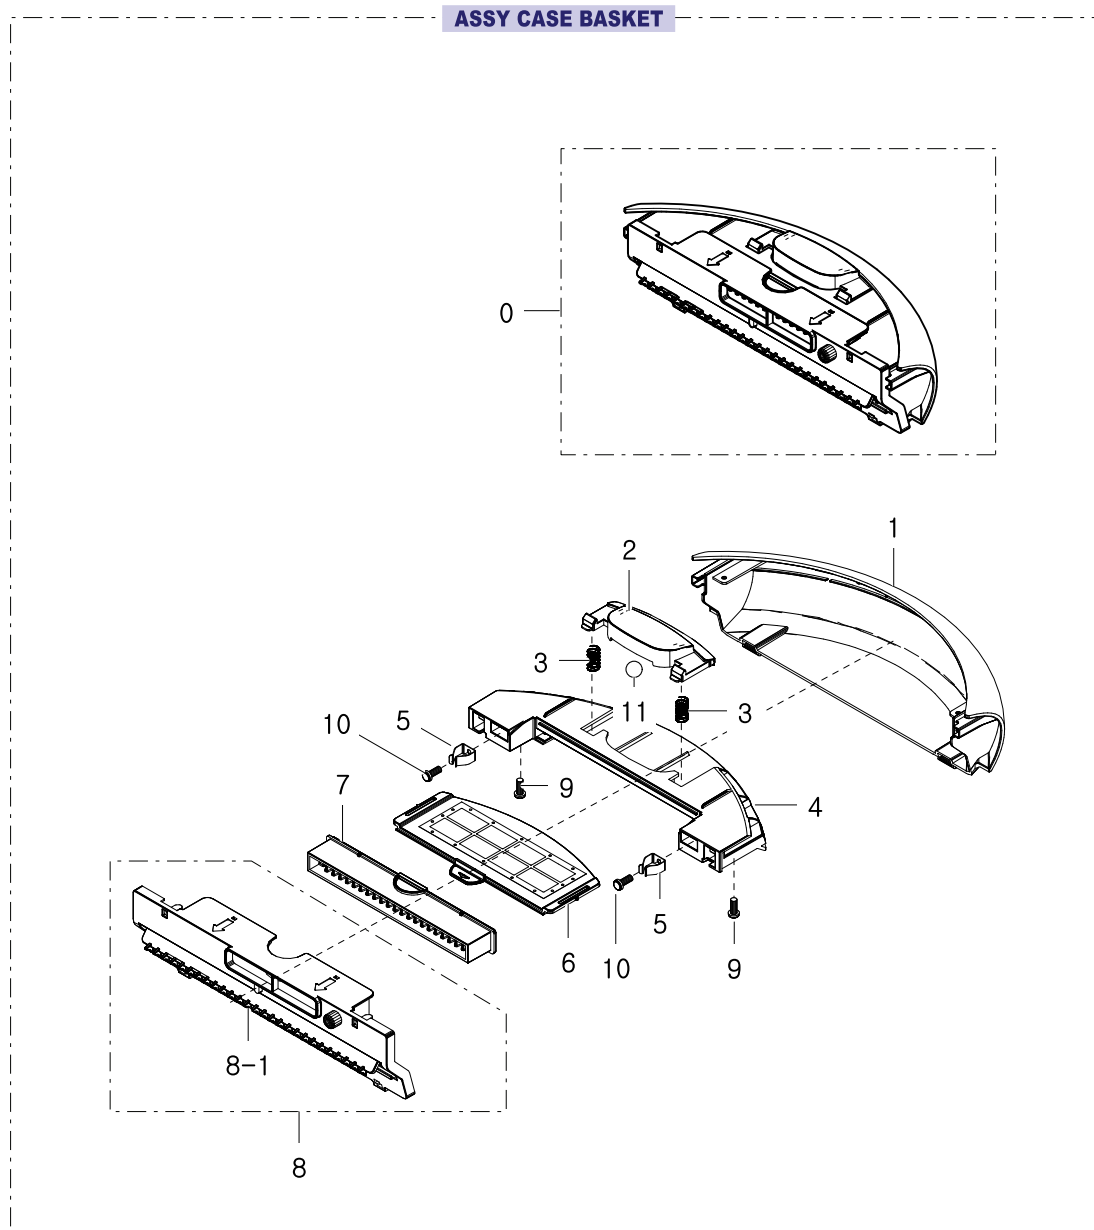


Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	1	RA013	DJ97-01796B	ASSY CASE BASKET; VC-RM84V,No,Bagfree,EPA	SA	1
1	2	RB094	DJ61-01934A	CASE-DUST; VC-RM84V,ABS,TRP GRAY	SNA	1
2	2	RB095	DJ65-00079A	CLAMPER DUST; VC-RM84V,ABS,EBONY BLACK,DE	SNA	1
3	2		DJ61-01601A	SPRING ETC-DUST; AUTOBOT,STAINLESS-ST304	SNA	2

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
4	2		DJ61-01932A	CASE-DUST UP; VC-RM84V,ABS,EBONY BLACK	SNA	1
5	2		DJ61-01563A	PLATE-COVER DUST; VC-RA84V,STAINLESS-ST3	SNA	2
6	2	RA106	DJ97-01778A	ASSY FILTER-MESH; VC-RM84V,-,SUB GRAY,MES	SA	1
7	1	RA024	DJ97-01777B	ASSY GRILLE FILTER; VC-RM84V,BLUE,EPA10	SA	1
8	2	RB028	DJ97-01810A	ASSY COVER DUST SUB; VC-RM84V	SA	1
8-1	3	RB105	DJ63-01202A	COVER DUST; VC-RM84V,ABS,CERULEAN BLUE	SA	1
9	2	RV005	6002-000380	SCREW-TAPPING; PH,+,-,2S,M3,L12,ZPC(WHT),	SNA	2
10	2	RV005	6002-000630	SCREW-TAPPING; PH,+,-,NO,2S,M3,L8,ZPC(WHT),	SNA	4
11	2		DJ61-01496A	STOPPER-BUTTON; SC6750,SUS,SILVER,SILVER	SNA	1

4. Assy Charger

Exploded View

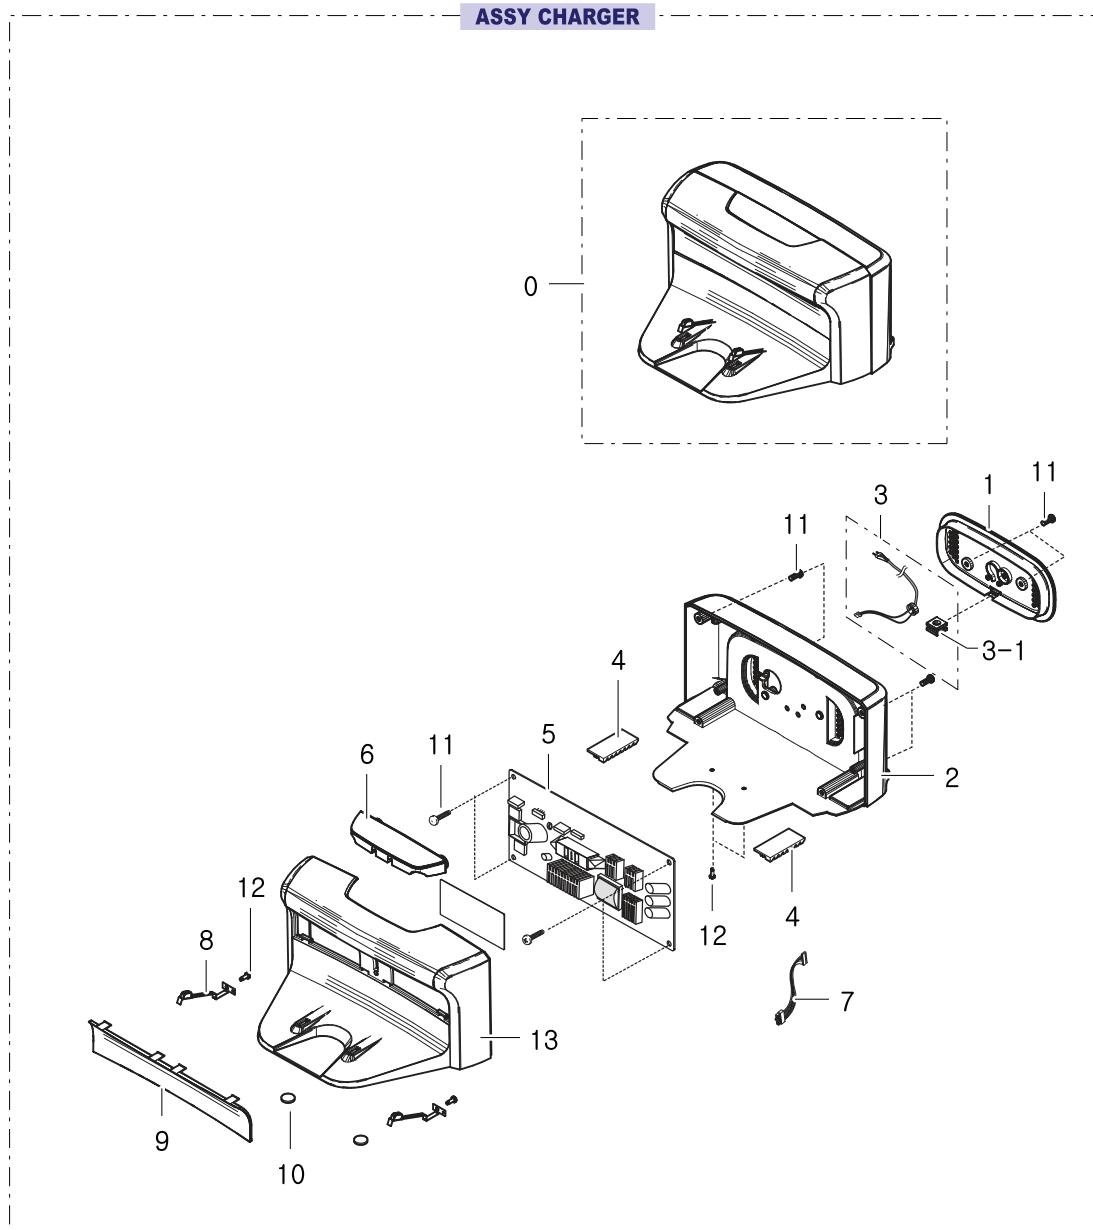


Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	1	RA014	DJ96-00149B	ASSY CHARGER; MAX-PJT,SUB GRY,EXP,230V,CP	SA	1
1	2		DJ63-01205A	COVER-CORD; VC-RM84V,ABS,SUB GRY,ANTI-FLA	SNA	1
2	2	RA122	DJ61-01939A	BODY-CHARGER; VC-RM84V,ABS,SUB GRY	SNA	1
3	2	RJ017	DJ95-00021P	ASSY POWER CORD; MAX_CHARGER,CP2 4.8,L200	SA	1
3-1	3	RJ113	DJ61-01942A	BUSH CORD; VC-RM84V,PVC,BLK	SNA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
4	2		DJ73-00040A	RUBBER ADAPTER; VC-RA84V,TPU,BLACK	SNA	2
5	2	RJ097	DJ41-00600A	PBA SMPS; MAX,180*94,Y,100~240V,16.8V,40,	SA	1
6	2		DJ63-01214A	COVER-CHARGER TOP; VC-RM84V,PC,TRP BLK	SNA	1
7	2		DJ39-00185R	WIRE HARNESS-PCB; VC-RM52V,UL1007,3,RED/B	SNA	1
8	2	RJ171	DJ65-00062A	TERMINAL-PLATE; VC-RA84V,BRASS	SA	2
9	2		DJ64-01069A	WINDOW-SENSOR; VC-RM84V,PC,TRP BLK	SA	1
10	2		DJ73-00024A	RUBBER ADAPTER; VC-RP30W,NBR,BLACK	SNA	2
11	2	RV005	6003-000169	SCREW-TAPTYPE; PH,+,-,B,M4,L10,ZPC(WHT),S	SNA	10
12	2	RV005	6002-000630	SCREW-TAPPING; PH,+,-,NO,2S,M3,L8,ZPC(WHT),	SNA	4
13	2	RA048	DJ63-01204A	COVER-CHARGER FRONT; VC-RM84V,ABS,SUB GRY	SNA	1

5. Assy Smart Gate

Exploded View

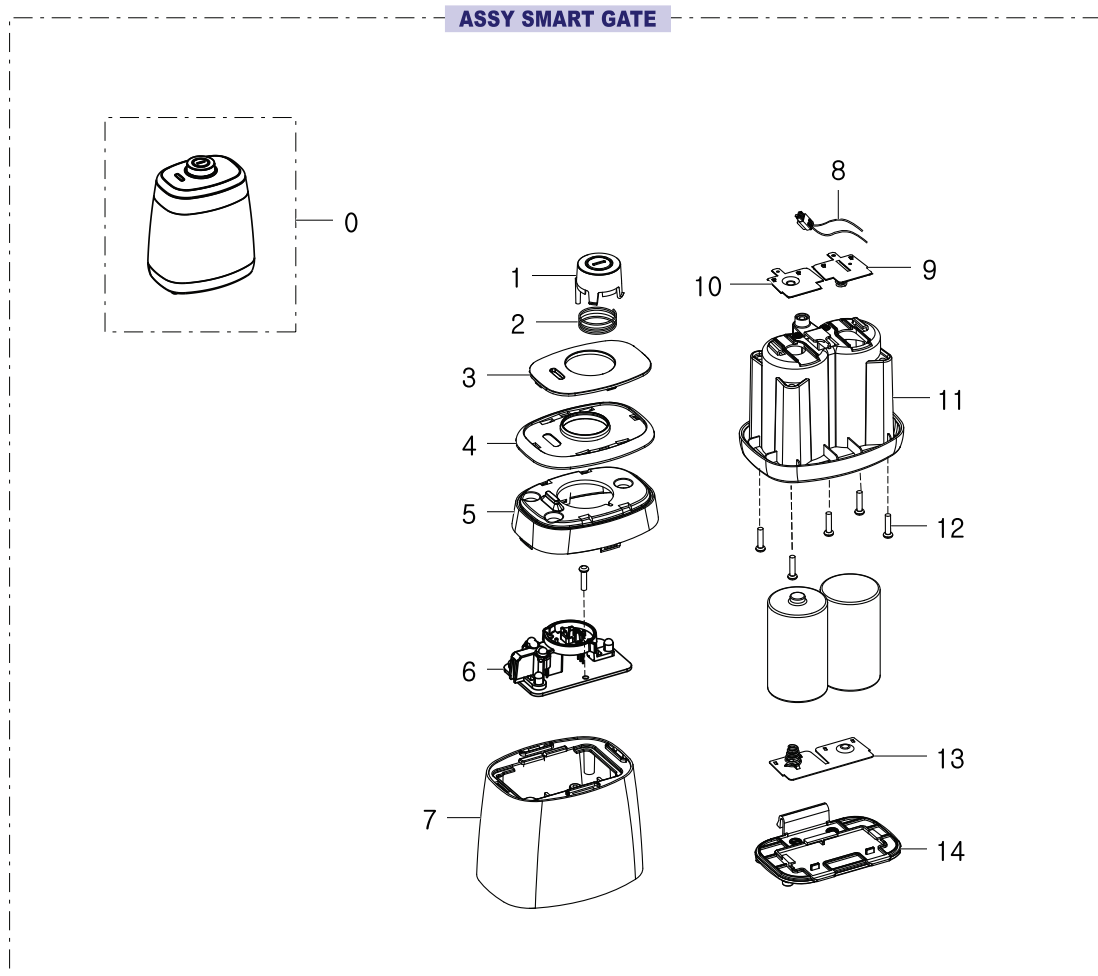

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	1	RA119	DJ97-01513D	ASSY-SMARTGATE; SR8950/SR8980,SMART GATE,	SA	2
1	2	RP476	DJ97-01512A	ASSY-LENS; VCR8855,SMART GATE,EXP(VE)	SA	2
2	2		DJ61-01759A	SPRING ETC-BUTTON; AUTOBOT,HSWR,CD0.8,ID1	SNA	2
3	2		DJ63-01051C	COVER-SMART TOP; SR8897,ABS,W67.7,L48.8,T	SNA	2
4	2		DJ61-01751A	CASE-SMART UP; VCR8855,ABS,W77.9,L57.9,SU	SNA	2
5	2	RA120	DJ64-00945A	WINDOW-SMART; VCR8855,PC,W81.7,L61.5,TRP,	SNA	2
6	2	RJ165	DJ41-00541B	PBA-S/G MAIN; SR8897(JAPAN),SMARTGATE,FR1	SA	2
7	2		DJ61-01752A	BODY-SMART; VCR8855,ABS,SUB GRAY	SNA	2

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
8	2		DJ39-00184N	WIRE HARNESS-POWER S/G; VC-RA84V,2,RED/BL	SNA	2
9	2		DJ97-01293A	ASSY-PLATE MINUS; AUTOBOT,PLATE MINUS,ASS	SNA	2
10	2		DJ61-01597A	PLATE-PLUS; VC-RA84V,BRASS,T0.5,W27.8,L30	SNA	2
11	2		DJ61-01750A	CASE-SMART LOW; VCR8855,ABS,W91.8,L70.9,E	SNA	2
12	2	RV005	6002-000380	SCREW-TAPPING; PH,+,-,2S,M3,L12,ZPC(WHT),	SNA	2
13	2		DJ97-01297A	ASSY-PLATE C; AUTOBOT,PLATE C,ASSY	SNA	2
14	2	RP419	DJ63-01050A	COVER-BATTERY; VCR8855,ABS,W80.5,L51.5,EB	SA	2