


1. FREEZER

FREEZER

Exploded View

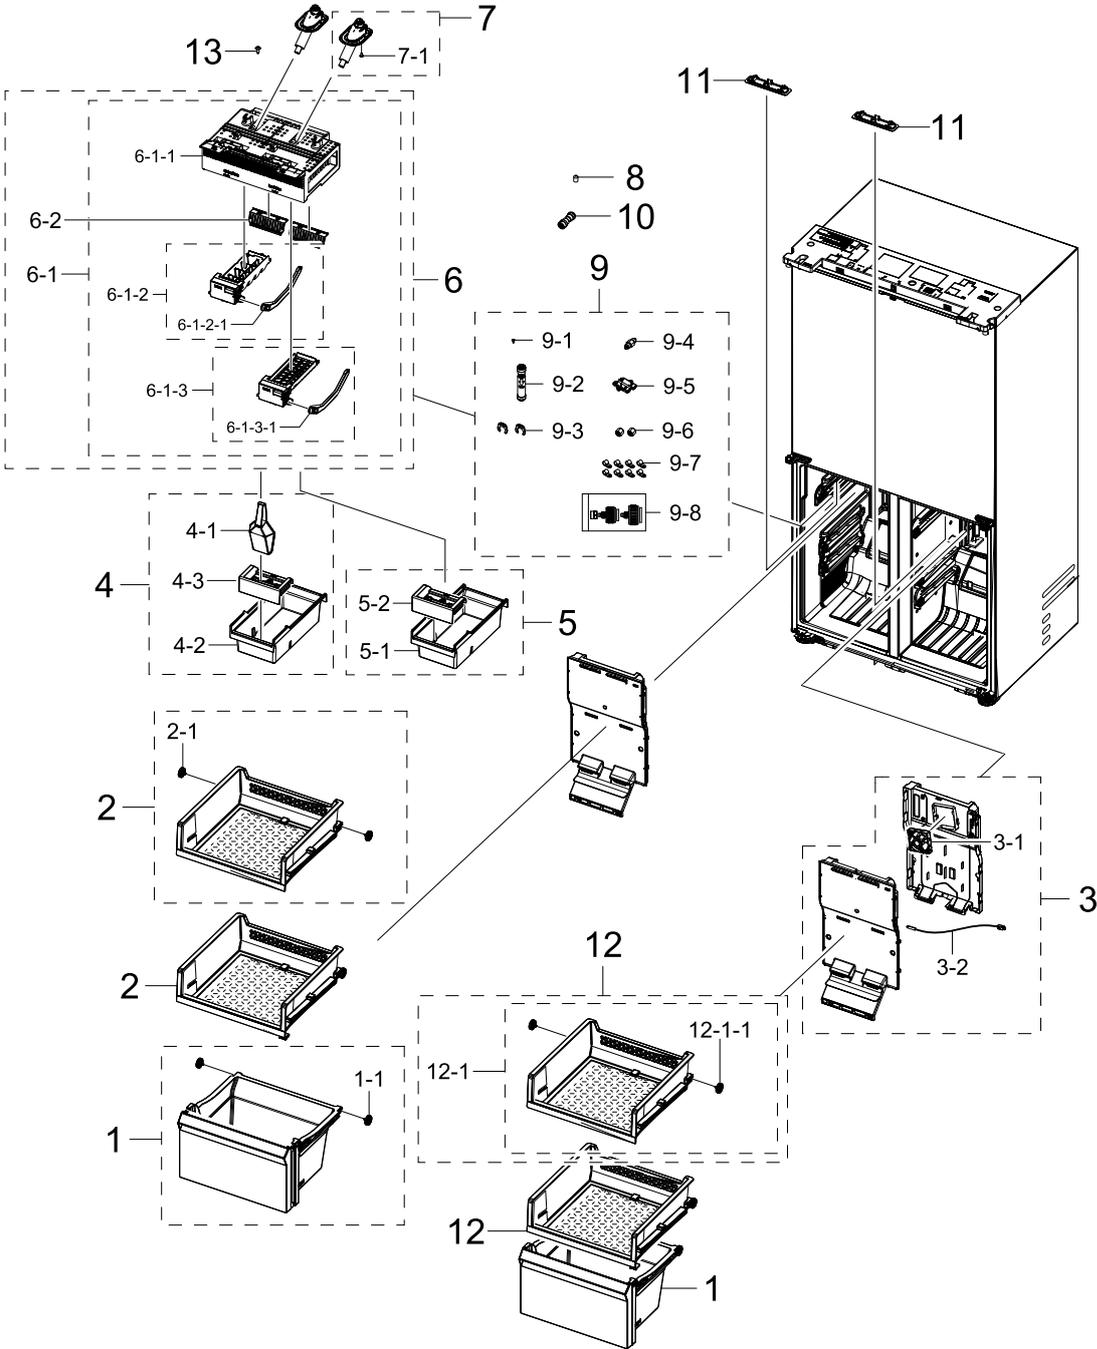

Parts List


| No. | Lvl. | Loc. | Material Code | Description & Specification | SNA | Qty. |
|---------|------|-------|---------------|--|-----|------|
| 1 | 2 | A1186 | DA97-21875C | ASSY CASE BASKET-LOW; RF9000AC,INDIA | SA | 2 |
| 1-1 | 3 | A1083 | DA97-19988A | ASSY ROLLER; RF9000K,29 | SA | 4 |
| 2 | 2 | | DA97-21798B | ASSY SHELF SLIDE-FRE; RF9000AC,VIO VINYL | SA | 2 |
| 2-1 | 3 | A1083 | DA97-19988A | ASSY ROLLER; RF9000K,29 | SA | 4 |
| 3 | 2 | M0303 | DA97-23641A | ASSY COVER EVAP-FRE; RF9000,Box Fan | SA | 2 |
| 3-1 | 3 | | DA31-00287A | MOTOR BLDC FAN;3350±7%,12V,0.16A,1.92W,- | SC | 2 |
| 3-2 | 3 | A1018 | DA32-00011C | SENSOR TEMP;QUEEN,-50 ~ 80 °C,5V,R SENSOR | SA | 2 |
| 4 | 2 | | DA97-21793L | ASSY CASE ICE; RF9000DC,610, GLOBAL, SCOO | SNA | 1 |
| 4-1 | 3 | | DA61-14309A | CASE ICE-SCOOP; RF9900T,PCTG,T2,TP GRAY,J | SA | 1 |
| 4-2 | 3 | | DA61-14444A | CASE ICE-CUBE; RF9000AC,GPPS,T2.5,TP GRAY | SA | 1 |
| 4-3 | 3 | | DA63-12133A | COVER ICE-FRE; RF9000D,PCTG,T3.5,-,TP GRA | SA | 1 |
| 5 | 2 | | DA97-21793M | ASSY CASE ICE; RF9000DC,610, GLOBAL, WITH | SNA | 1 |
| 5-1 | 3 | | DA61-14444A | CASE ICE-CUBE; RF9000AC,GPPS,T2.5,TP GRAY | SA | 1 |
| 5-2 | 3 | | DA63-12133A | COVER ICE-FRE; RF9000D,PCTG,T3.5,-,TP GRA | SA | 1 |
| 6 | 2 | M0247 | DA97-21804A | ASSY ICE MAKER-MECH; RF9000A,DUAL | SNA | 1 |
| 6-1 | 3 | A0104 | DA97-21804C | ASSY ICE MAKER; RF8000BC,BRACKET DELETE | SNA | 1 |
| 6-1-1 | 4 | | DA61-14435A | SUPPORT ICE MAKER; RF9000A,HIPS,T3,S834S1 | SA | 1 |
| 6-1-2 | 4 | | DA97-22162A | ASSY CASE ICE; RF9000A,SERVICE (CUBE) | SA | 1 |
| 6-1-2-1 | 5 | | DA61-14661A | GUIDE ICE; RF9000A,PP,BJ750,NATURAL,RF900 | SA | 2 |
| 6-1-3 | 4 | | DA97-22160A | ASSY CASE ICE; RF9000A,SERVICE (NUGGET) | SA | 1 |
| 6-1-3-1 | 5 | | DA61-14661A | GUIDE ICE; RF9000A,PP,BJ750,NATURAL,RF900 | SA | 2 |
| 6-2 | 3 | | DA63-11369B | COVER ICE-FRE; RF9000A,PP,T2.5,-,COOL WHI | SA | 2 |
| 7 | 2 | | DA97-21801C | ASSY PIPE WATER ICE; RF9000A,SEAL 160mm,A | SA | 2 |
| 7-1 | 3 | G0412 | 6002-000239 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L8,M4,TH | SA | 2 |
| 8 | 2 | M0208 | DA73-00211A | RUBBER-CAP HOSE; RS8000,Si,-,-,GRAY,- | SA | 1 |
| 9 | 2 | | DA97-11752E | ASSY INSTALL-FILTER; AW2,AW3(GLOBAL),NO W | SC | 1 |
| 9-1 | 3 | G0412 | 6002-000213 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T | SA | 9 |
| 9-2 | 3 | | DA60-00336A | FITTING TUBE; POM,ID1/4 | SA | 1 |
| 9-3 | 3 | | DA61-04522A | CLIP-FITTING LOCK; AW,POM,NATURAL,POM | SA | 2 |
| 9-4 | 3 | | DA62-01378B | VALVE-FITTING PU; AT06,C3604,-,- | SA | 1 |
| 9-5 | 3 | | DA63-04744A | COVER-CHECK VALVE; HM,PP,HB,INNER GRAY,CN | SA | 1 |
| 9-6 | 3 | Z1225 | DA74-00070B | VALVE-FITTING NUT; A-TOP,C3604,-,-,- | SA | 2 |
| 9-7 | 3 | G0589 | DA65-20110B | CABLE CLAMP; PA66 | SA | 8 |
| 9-8 | 3 | | DA62-01329A | PIPE-CONNECT WATER PACKING; ET-PJT,BRASS, | SA | 1 |
| 10 | 2 | T0093 | DA60-00258B | FITTING TUBE; PP,ID1/4,1/4'- 1/4' | SA | 1 |
| 11 | 2 | | DA63-04921B | COVER LAMP-LED FRONT; CULLINAN,PC,-,V-2,N | SA | 2 |

| No. | Lvl. | Loc. | Material Code | Description & Specification | SNA | Qty. |
|--------|------|-------|---------------|--|-----|------|
| 12 | 2 | | DA97-23375B | ASSY SHELF-SLIDE FRE SHELF MODULE; RF9000 | SNA | 2 |
| 12-1 | 3 | | DA97-21798D | ASSY SHELF SLIDE-FRE; RF7000AC,610,NO VIN | SA | 2 |
| 12-1-1 | 4 | A1083 | DA97-19988A | ASSY ROLLER; RF9000K,29 | SA | 4 |
| 13 | 2 | G0412 | 6002-001306 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L14,M4,T | SA | 6 |

2. FRIDGE

FRIDGE

Exploded View

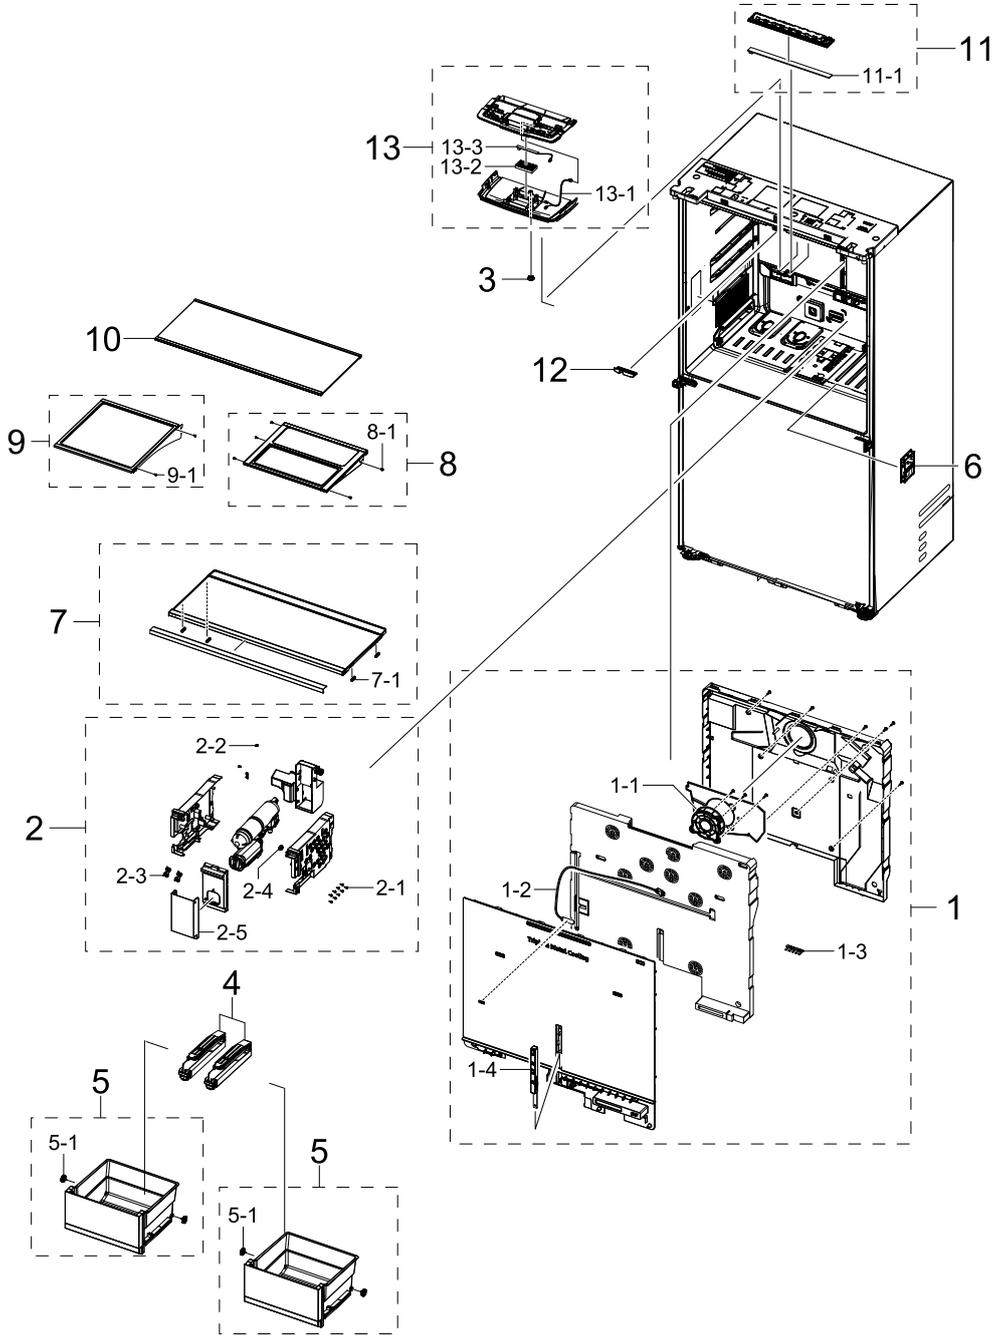


Parts List

| No. | Lvl. | Loc. | Material Code | Description & Specification | SNA | Qty. |
|------|------|-------|---------------|---|-----|------|
| 1 | 2 | Z1177 | DA97-21807H | ASSY COVER EVAP-REF; RF9000D,Normal,Metal | SA | 1 |
| 1-1 | 3 | | DA31-00334D | MOTOR BLDC FAN; I2035GE-12M-YT,1775±7%,12 | SA | 1 |
| 1-2 | 3 | A1018 | DA32-00070E | SENSOR TEMP; SC41198-021A,1100mm,13.2kohm | SA | 1 |
| 1-3 | 3 | | DA61-11034A | FIXER; RT5000K,PA66,-,WHITE,-,KN3322V0,5P | SA | 1 |
| 1-4 | 3 | | DA61-14455A | ANGLE SHELF-REF MIDDLE; GI-SGCC,T2.5,-,-, | SA | 1 |
| 2 | 2 | | DA97-21797G | ASSY CASE FILTER; RF9000AC,220V, NO FLOW | SA | 1 |
| 2-1 | 3 | G0412 | 6002-000213 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T | SA | 9 |
| 2-2 | 3 | | DA61-04522A | CLIP-FITTING LOCK; AW,POM,NATURAL,POM | SA | 7 |
| 2-3 | 3 | | DA61-10404A | GUIDE HOSE; PP,HB,BJ750,COOL WHITE,L | SA | 2 |
| 2-4 | 3 | | DA62-02414A | TUBE-FITTING L; POM,-,1/4inch,-,-,-,1/4-1 | SA | 2 |
| 2-5 | 3 | | DA63-11209A | COVER FILTER; RF9000AC,GPPS,T2.5,TP GRAY, | SA | 1 |
| 3 | 2 | A0270 | DA67-30266K | CAP SCREW; A-TOP,PP,T1.5,HB,BJ750,COOL WH | SA | 1 |
| 4 | 2 | | DA97-21876B | ASSY RAIL-MIDDLE LEFT; RF9000AC,DELETE RO | SA | 2 |
| 5 | 2 | A0217 | DA97-21878M | ASSY CASE VEG; RF9000AC,CD, INDIA, Recycl | SA | 2 |
| 5-1 | 3 | A1083 | DA97-19988A | ASSY ROLLER; RF9000K,29 | SA | 4 |
| 6 | 2 | A0626 | DA97-24205E | ASSY COVER CONTROL; RF9000_STD,ENG, KOR, | SA | 1 |
| 7 | 2 | | DA97-21902L | ASSY SHELF VEG-LOW; RF8000BC,White Printi | SA | 1 |
| 7-1 | 3 | | DA64-03784A | TRIM SHELF; ARAM,LDPE,MB9500,-,NATURAL,- | SA | 4 |
| 8 | 2 | | DA97-21895A | ASSY SHELF QUICK SPACE; RF9000AC,LUMINOUS | SA | 1 |
| 8-1 | 3 | G0412 | 6002-001397 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L8,M4,TH | SA | 5 |
| 9 | 2 | | DA97-22970A | ASSY SHELF INSERT-REF FIX; RF8000BC,Inser | SA | 1 |
| 9-1 | 3 | G0412 | 6002-001397 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L8,M4,TH | SA | 2 |
| 10 | 2 | | DA97-21898A | ASSY SHELF-REF UP; RF9000AC,LUMINOUS TRIM | SA | 1 |
| 11 | 2 | | DA97-21951E | ASSY COVER LAMP-REF; RF9000D_Hybrid,LED P | SA | 1 |
| 11-1 | 3 | | DA96-01672A | ASSY LAMP LED; 20,FR-4,370 X 25,WHITE,SMA | SA | 1 |
| 12 | 2 | | DA61-15859A | GUIDE FRENCH; RF9000C,PC+ABS,T2,-,HR-1008 | SA | 1 |
| 13 | 2 | | DA97-23218B | ASSY COVER DEODORIZER; RF9000B,UV,GLOVAL, | SA | 1 |
| 13-1 | 3 | | DA96-00852E | ASSY WIRE HARNESS-SPI; ALL PJT, WIRE OF D | SA | 1 |
| 13-2 | 3 | G0403 | DA02-00249A | CATALYST; T10,W35,L70,Ceramic,Biocidal_Y | SA | 1 |
| 13-3 | 3 | | DA96-00392G | ASSY LAMP LED; 2,FR-4,85*10,WHITE,SMH200- | SA | 1 |

3. CABINET

CABINET

Exploded View

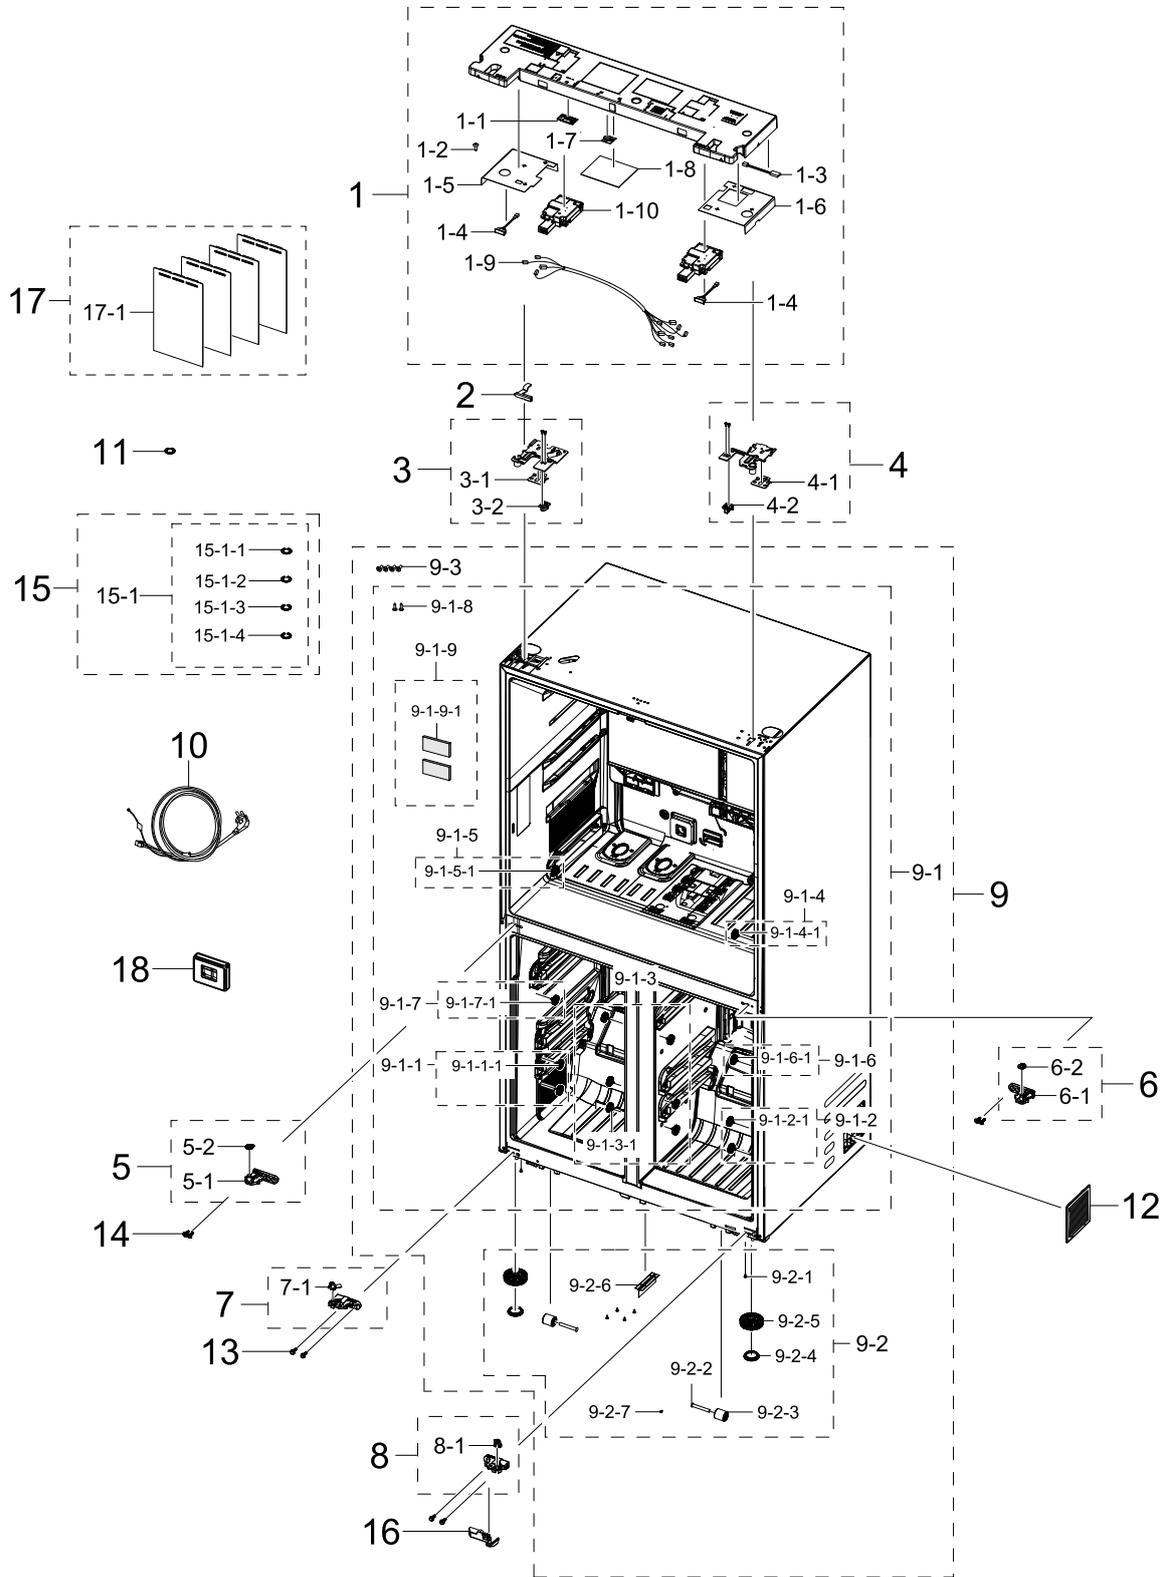

Parts List

| No. | Lvl. | Loc. | Material Code | Description & Specification | SNA | Qty. |
|-------|------|-------|---------------|--|-----|------|
| 1 | 2 | A1288 | DA97-24811K | ASSY TOP TABLE; RF9000D,INOX GRAY,AOD, PB | SA | 1 |
| 1-1 | 3 | | 4709-003141 | W-LAN MODULE; CCAR210R,SDA8700CSM,IEEE802 | SA | 1 |
| 1-2 | 3 | G0412 | 6002-000635 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L8,M4,PH | SA | 1 |
| 1-3 | 3 | A1108 | DA32-00088A | SENSOR HUMIDITY; 5V,0~100%RH,4.5%,100mm,4 | SA | 1 |
| 1-4 | 3 | | DA34-00043L | SWITCH REED; UL1007 AWG 22,L100 | SA | 2 |
| 1-5 | 3 | | DA61-16184A | PLATE COVER; RF9000JC,GL-SGLCC,T0.25,-,-, | SA | 1 |
| 1-6 | 3 | | DA61-16185A | PLATE COVER; RF9000JC,GL-SGLCC,T0.25,-,-, | SA | 1 |
| 1-7 | 3 | | DA92-00817A | ASSY MODULE; HW,BUZZER PBA,RB6000K,Standa | SA | 1 |
| 1-8 | 3 | | DA92-01808A | ASSY PCB SUB; AOD SUB PBA,RF9000D HYBRID, | SA | 1 |
| 1-9 | 3 | | DA96-01639H | ASSY WIRE HARNESS-TOP; RF9000D,BASIC, AOD | SA | 1 |
| 1-10 | 3 | | DA97-24796B | ASSY EASY OPEN; RF9000D,Roller Pusher, IN | SA | 2 |
| 2 | 2 | | DA61-04932B | FIXER-HINGE; RS76,RS78,PO-SPHC,T3,-,-,-,Z | SA | 2 |
| 3 | 2 | | DA97-19972D | ASSY HINGE-UP LEFT; RF9000R,T3,BLACK | SA | 1 |
| 3-1 | 3 | | DA63-50192A | SHIM HINGE-UP; -,PVC,T1,NATURAL,-,-,LS130 | SA | 1 |
| 3-2 | 3 | | DA66-01678A | CAM AUTO CLOSE-LEFT; RF9000CC,POM,-,BLACK | SA | 1 |
| 4 | 2 | | DA97-19973C | ASSY HINGE-UP RIGHT; RF9000R,T3,BLACK | SA | 1 |
| 4-1 | 3 | | DA63-50192A | SHIM HINGE-UP; -,PVC,T1,NATURAL,-,-,LS130 | SA | 1 |
| 4-2 | 3 | | DA66-01677A | CAM AUTO CLOSE; RF9000CC,POM,-,BLACK,-,K3 | SA | 1 |
| 5 | 2 | | DA97-25013A | ASSY HINGE-MIDDLE LEFT; RF9000D,GROMMET(C | SA | 1 |
| 5-1 | 3 | | DA61-16173A | HINGE-MIDDLE LEFT; RF9000D,Zn,T8,-,-,-,-, | SNA | 1 |
| 5-2 | 3 | | DA66-01710A | CAM RISER-LOW LEFT; RF9000D,POM,-,BLACK,- | SA | 1 |
| 6 | 2 | | DA97-25014A | ASSY HINGE-MIDDLE RIGHT; RF9000D,GROMMET(| SA | 1 |
| 6-1 | 3 | | DA61-16174A | HINGE-MIDDLE RIGHT; RF9000D,Zn,T8,-,-,-,- | SNA | 1 |
| 6-2 | 3 | | DA66-01711A | CAM RISER-LOW RIGHT; RF9000D,POM,-,BLACK, | SA | 1 |
| 7 | 2 | | DA97-23110A | ASSY HINGE-LOW LEFT; RF9000B,BLACK,AUTO C | SA | 1 |
| 7-1 | 3 | | DA63-09856A | GROMMET HINGE-LOW; RF9900T,POM,BLACK,-,K3 | SA | 1 |
| 8 | 2 | | DA97-23111A | ASSY HINGE-LOW RIGHT; RF9000B,BLACK,AUTO | SA | 1 |
| 8-1 | 3 | | DA63-09857A | GROMMET HINGE-LOW; RF9900T,POM,BLACK,-,K3 | SA | 1 |
| 9 | 1 | A0037 | DA90-14692R | ASSY CABINET FORM; RF9000D,CD,610,SILVER, | SNA | 1 |
| 9-1 | 2 | A0137 | DA94-09095D | ASSY LINER; RF9000D,CD,L-BSC,DUAL I/M,SPI | SNA | 1 |
| 9-1-1 | 3 | | DA97-15419A | ASSY RAIL-LEFT; RF9000JC | SNA | 2 |

Exploded Views and Parts List


| No. | Lvl. | Loc. | Material Code | Description & Specification | SNA | Qty. |
|---------|------|-------|---------------|--|-----|------|
| 9-1-1-1 | 4 | A1083 | DA97-19988A | ASSY ROLLER; RF9000K,29 | SA | 2 |
| 9-1-2 | 3 | | DA97-15420A | ASSY RAIL-RIGHT; RF9000JC | SNA | 2 |
| 9-1-2-1 | 4 | A1083 | DA97-19988A | ASSY ROLLER; RF9000K,29 | SA | 2 |
| 9-1-3 | 3 | A1254 | DA97-21953C | ASSY PARTITION-FRE V; RF9000AC,DEPTH 610, | SNA | 1 |
| 9-1-3-1 | 4 | A1083 | DA97-19988A | ASSY ROLLER; RF9000K,29 | SA | 6 |
| 9-1-4 | 3 | | DA97-21970A | ASSY RAIL-REF LOW RIGHT; RF9000AC | SNA | 1 |
| 9-1-4-1 | 4 | A1083 | DA97-19988A | ASSY ROLLER; RF9000K,29 | SA | 1 |
| 9-1-5 | 3 | | DA97-21971A | ASSY RAIL-REF LOW LEFT; RF9000AC | SNA | 1 |
| 9-1-5-1 | 4 | A1083 | DA97-19988A | ASSY ROLLER; RF9000K,29 | SA | 1 |
| 9-1-6 | 3 | | DA97-21972A | ASSY RAIL-FRE UP RIGHT; RF9000AC | SNA | 1 |
| 9-1-6-1 | 4 | A1083 | DA97-19988A | ASSY ROLLER; RF9000K,29 | SA | 1 |
| 9-1-7 | 3 | | DA97-21973A | ASSY RAIL-FRE UP LEFT; RF9000AC | SNA | 1 |
| 9-1-7-1 | 4 | A1083 | DA97-19988A | ASSY ROLLER; RF9000K,29 | SA | 1 |
| 9-1-8 | 3 | G0412 | 6002-000215 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L16,M4,T | SA | 2 |
| 9-1-9 | 3 | | DA97-23184H | ASSY PIPE SUCTION; RF9000C,AL SUCTION, Ki | SNA | 1 |
| 9-1-9-1 | 4 | | DA72-60040C | SEAL CUTT-RUBBER; RF6000T,RUBBER,T4,W45,L | SA | 2 |
| 9-2 | 2 | | DA97-24889A | ASSY CABI FRAME-BOTTOM; RF9000DC,610, VF | SNA | 1 |
| 9-2-1 | 3 | G0412 | 6002-000213 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T | SA | 3 |
| 9-2-2 | 3 | M0146 | DA61-01920A | FIXER-CASTER; ZPC2,SWRCH10A,-,-,-,OD8.0 | SA | 2 |
| 9-2-3 | 3 | M0145 | DA61-04702A | CASTER-FRONT; AW-PJT,PP,BLACK | SA | 2 |
| 9-2-4 | 3 | | DA63-06285A | COVER-FOOT; SUPER STAR,RT7000K,PP,T2.5,-, | SA | 2 |
| 9-2-5 | 3 | A0577 | DA61-15096A | FOOT-FRONT; RF9000AC,PP,BLACK,-,-,SSPP-64 | SA | 2 |
| 9-2-6 | 3 | | DA64-05373F | TRIM BLADE; RF9000DC,PVC,-,-,LIGHT GRAY,- | SA | 1 |
| 9-2-7 | 3 | G0412 | 6002-000217 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L8,M4,TH | SA | 1 |
| 9-3 | 2 | G0412 | 6002-001122 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L14,M4,F | SC | 2 |
| 10 | 2 | A0273 | 3903-001011 | POWER CORD-AT; H05VV-F 3x0.75mm2,BLK,EU3F | SA | 1 |
| 11 | 2 | | DA60-00314B | FASTENER-HINGE; ROMANEE CONTI,PP+(GF+KD)3 | SA | 1 |
| 12 | 2 | | DA63-07680A | COVER UNIT; AW3-14,PP,HB,INOX GRAY,49MK45 | SA | 1 |
| 13 | 2 | A0564 | DA60-10123E | BOLT-HEX; M6,L19,ZPC(WHT),SWRCH18A,HH Hea | SA | 4 |
| 14 | 2 | M0210 | 6003-001727 | BOLT-ETC; M6,L20,ZPC(WHT),SWRCH18A,FH Hea | SA | 4 |
| 15 | 2 | | DA98-03466C | ASSY MANUAL; RF9000D/DC,EF | SNA | 1 |
| 15-1 | 3 | | DA99-04158A | ASSY INSTALL-STEP KIT; T/FDR,INDIA PRINT, | SA | 1 |
| 15-1-1 | 4 | | DA60-00314A | FASTENER-HINGE; ROMANEE CONTI,PP+(GF+KD)3 | SA | 1 |
| 15-1-2 | 4 | | DA60-00314B | FASTENER-HINGE; ROMANEE CONTI,PP+(GF+KD)3 | SA | 1 |

| No. | Lvl. | Loc. | Material Code | Description & Specification | SNA | Qty. |
|--------|------|-------|---------------|--|-----|------|
| 15-1-3 | 4 | | DA60-00314C | FASTENER-HINGE; ROMANEE CONTI,PP+(GF+KD)3 | SC | 1 |
| 15-1-4 | 4 | | DA60-00314D | FASTENER-HINGE; ROMANEE CONTI,PP+(GF+KD)3 | SA | 1 |
| 16 | 2 | | DA63-09539C | COVER WIRE; RF9000A,PP,T2,HB,EBONY BLACK, | SA | 1 |
| 17 | 2 | | DA91-06529A | ASSY INSTALL-PARTS KIT; BESPOKE_INSTALL,H | SNA | 1 |
| 17-1 | 3 | | DA97-20982A | ASSY SUPPORT; BESPOKE,T1.5,W130,L230,NATU | SA | 4 |
| 18 | 2 | E0010 | DA97-00713C | ASSY-THERMO GUIDE; XEF,THERMO,COOL WHITE | SA | 1 |

4. CYCLE

CYCLE

Exploded View

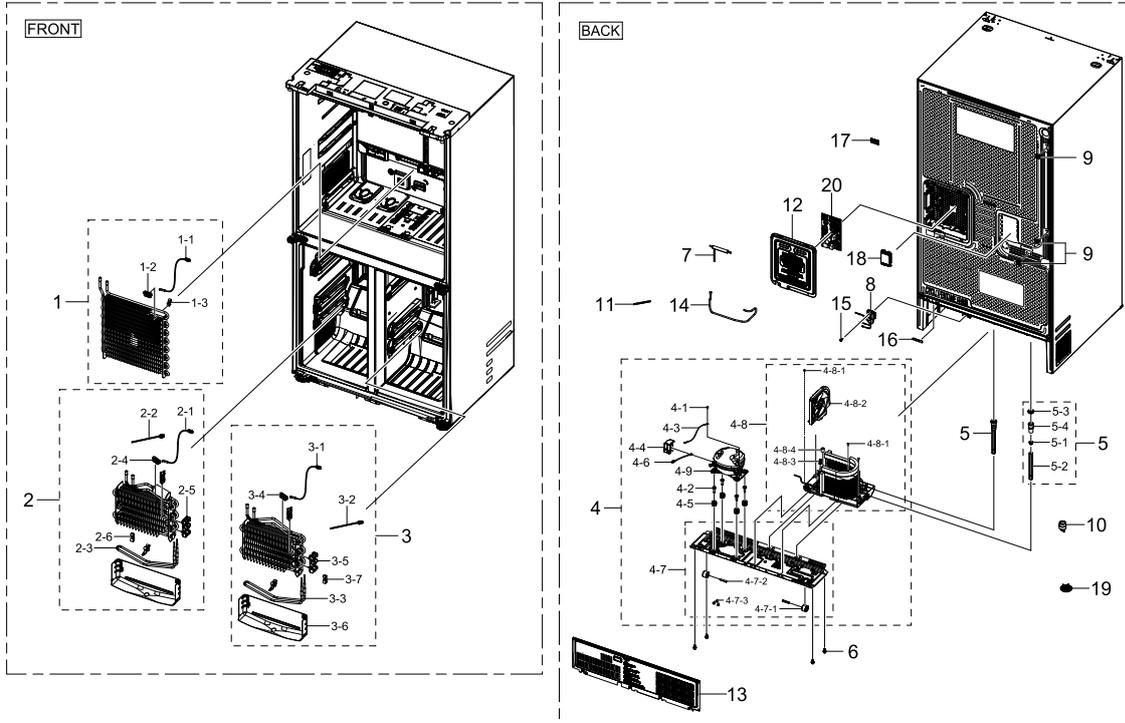

Parts List

| No. | Lvl. | Loc. | Material Code | Description & Specification | SNA | Qty. |
|-----|------|-------|---------------|--|-----|------|
| 1 | 2 | | DA96-01519B | ASSY EVAP-REF EVAP MODULE; RF9000B,FIN TU | SA | 1 |
| 1-1 | 3 | A1018 | DA32-10104W | SENSOR TEMP; DOUBLE_INSULATION, TPA,L200, | SA | 1 |
| 1-2 | 3 | | DA61-03683A | FIXER-SENSOR; AW-PJT,PP,NATURAL,FH44N,V-0 | SA | 1 |
| 1-3 | 3 | | DA61-06013B | FIXER WIRE; AW3-PJT,PP,T2,NATURAL,-,BJ750 | SA | 1 |
| 2 | 2 | | DA96-01515E | ASSY EVAP-FRE EVAP MODULE; RF9000B,Fin Tu | SA | 1 |
| 2-1 | 3 | A1018 | DA32-10104V | SENSOR TEMP; DKST1329GW,DOUBLE_INSULATION | SA | 1 |
| 2-2 | 3 | A1008 | DA47-00301D | THERMO FUSE-ASSY;AC250V,10A,109~110°C,S,O | SA | 1 |
| 2-3 | 3 | | DA47-00318U | HEATER METAL SHEATH; AC230V,T, 437.2ohm,1 | SA | 1 |
| 2-4 | 3 | | DA61-03683A | FIXER-SENSOR; AW-PJT,PP,NATURAL,FH44N,V-0 | SA | 1 |
| 2-5 | 3 | G0522 | DA61-06700A | FIXER-HEATER WIRE REF; HM/GGH/HAEMIL,PP,T | SA | 2 |
| 2-6 | 3 | | DA61-13585A | FIXER-BIMETAL; RF9000R,PP,T1.5,NATURAL,-, | SA | 1 |
| 3 | 2 | | DA96-01520E | ASSY EVAP-CONV EVAP MODULE; RF9000B,Fin T | SA | 1 |
| 3-1 | 3 | A1018 | DA32-10104V | SENSOR TEMP; DKST1329GW,DOUBLE_INSULATION | SA | 1 |
| 3-2 | 3 | A1008 | DA47-00301D | THERMO FUSE-ASSY;AC250V,10A,109~110°C,S,O | SA | 1 |

| No. | Lvl. | Loc. | Material Code | Description & Specification | SNA | Qty. |
|-------|------|-------|----------------|---|-----|------|
| 3-3 | 3 | | DA47-00318U | HEATER METAL SHEATH; AC230V,T, 437.2ohm,1 | SA | 1 |
| 3-4 | 3 | | DA61-03683A | FIXER-SENSER; AW-PJT,PP,NATURAL,FH44N,V-0 | SA | 1 |
| 3-5 | 3 | G0522 | DA61-06700A | FIXER-HEATER WIRE REF; HM/GGH/HAEMIL,PP,T | SA | 2 |
| 3-6 | 3 | | DA61-08675A | PLATE-DRAIN EVAP FRE; ROMANEE CONTI,AI,T0 | SA | 1 |
| 3-7 | 3 | | DA61-13585A | FIXER-BIMETAL; RF9000R,PP,T1.5,NATURAL,-,- | SA | 1 |
| 4 | 2 | | DA97-22349M | ASSY COMP N CONDENSING-COND MODULE; RF900 | SNA | 1 |
| 4-1 | 3 | G0412 | 6006-001170 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L10,M4,T | SA | 2 |
| 4-2 | 3 | A0564 | 6011-007289 | BOLT-HEX; M6,L43.6,ZPC(SILVER),HH,SOCKET, | SA | 4 |
| 4-3 | 3 | A0562 | DA39-20389L | ASSY WIRE HARNESS-EARTH; EARTH,ALL,FREE V | SC | 1 |
| 4-4 | 3 | Z1032 | DA63-06122A | COVER RELAY; MSV,MPPE,T2,BLACK,N300X,V-0 | SA | 1 |
| 4-5 | 3 | Z1112 | DA63-09336B | GROMMET COMP; REF,IIR,BLACK,-,-,L21.3, OD | SA | 4 |
| 4-6 | 3 | | DA96-01170A | ASSY WIRE HARNESS-COMP; ALL,ALL,FREE VOLT | SA | 1 |
| 4-7 | 3 | A0526 | DA97-12557T | ASSY CHASSIS COMP; RF9000C,GI-SGCC,T1.4,W | SA | 1 |
| 4-7-1 | 4 | A0527 | DA61-04703A | CASTER-REAR; AW-PJT,PP,BLACK,M/B(0103-002 | SA | 2 |
| 4-7-2 | 4 | M0212 | DA66-00649B | SHAFT-CASTER; POLARIS,MSWR10,L44,OD11,-,- | SA | 2 |
| 4-7-3 | 4 | G0412 | 6002-000470 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L10,M4,T | SA | 3 |
| 4-8 | 3 | A0529 | DA97-15978N | ASSY TRAY DRAIN WATER; RF9000C,T2,Gear Bo | SA | 1 |
| 4-8-1 | 4 | G0412 | 6002-000213 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T | SA | 2 |
| 4-8-2 | 4 | M0116 | DA97-20025A | ASSY SUPPORT-CIRCUIT MOTOR; NW2-FDR,C160N | SA | 1 |
| 4-8-3 | 4 | | DA63-07323A | GROMMET-IMMERSION PIPE B; ROMANEE CONTI,N | SA | 1 |
| 4-8-4 | 4 | M0333 | DA63-40171B | GROMMET-SUCT PIPE A; NBR,-,-,-,ID4,OD20 | SC | 1 |
| 4-9 | 3 | | NO14C9151AKD01 | CMP,COMP,REFRIGERATOR,R600A; CMP,COMP,REFRIGERATOR,R600A | SA | 1 |
| 5 | 2 | M0067 | DA97-04049E | ASSY CAP-DRAIN; AW3 | SA | 2 |
| 5-1 | 3 | A0336 | DA61-05021A | FIXER-DRAIN; HAEMIL,PP,T0.6,CARMEN WINE,B | SA | 2 |
| 5-2 | 3 | A1101 | DA62-01266B | TUBE PVC; AW3,PVC,-,OD19.4,L155,-,P-1000, | SA | 2 |
| 5-3 | 3 | | DA63-02761A | GROMMET-DRAIN; RS18RK,NBR,BLACK,- | SA | 2 |
| 5-4 | 3 | A0492 | DA67-01301A | CAP-DRAIN; AW4,HIPS,HB,576H,NATURAL | SA | 2 |
| 6 | 2 | A0564 | 6011-001656 | BOLT-HEX; M6,L16,ZPC(WHT),HH,SWRCH22A,MAC | SA | 4 |
| 7 | 2 | A0669 | DA62-04309A | DRYER; C1220T-H,L137,SINGLE MOUTH,OD15.8, | SA | 1 |
| 8 | 2 | | DA62-04617D | VALVE STEP; DC12V,MODULE,3WAY,LEFT/LEFT b | SA | 1 |
| 9 | 2 | | DA61-12488B | FIXER COVER; AW3,HIPS,INNER GRAY,CNTK H30 | SA | 3 |
| 10 | 2 | G0202 | DA63-00951C | GROMMET-DRAIN HOSE; V2-PJT,NBR,BLACK,- | SA | 1 |
| 11 | 2 | A0523 | DA73-10190U | PIPE-CONNECT DISC,B; ALL,C1220T,Cu,OD6.35 | SA | 1 |
| 12 | 2 | | DA97-22520A | ASSY COVER PCB-MAIN; AW,NO F-Hub, TIM | SA | 1 |
| 13 | 2 | M0076 | DA97-24085D | ASSY COVER COMP; RF9000C,GL-SGLCC,T0.25,I | SA | 1 |


Exploded Views and Parts List

| No. | Lvl. | Loc. | Material Code | Description & Specification | SNA | Qty. |
|-----|------|-------|---------------|--|-----|------|
| 14 | 2 | M0016 | DA62-03691A | PIPE CONNECT-SUCTION; RF9000, AW,Cu,OD6.3 | SA | 1 |
| 15 | 2 | | DK61-00464A | FIXER-STEP MOTOR; RUBY,SWRCH18A | SA | 1 |
| 16 | 3 | | DA61-05923A | REINF-EARTH; -,HGI-SGHC,T3,-,-,- | SA | 1 |
| 17 | 1 | | DA92-00945D | ASSY MODULE; HW,PBA-FUSE BLOCK,BRZ9000M,3 | SA | 1 |
| 18 | 2 | M0244 | DA97-08413B | ASSY COVER-TUBE FILTER; AW4,ASSY | SA | 1 |
| 19 | 2 | M0158 | DA63-03809A | COVER-URETHANE; AW-PJT,ABS,BLACK,VE-0858, | SA | 1 |
| 20 | 1 | | DA94-09323Z | ASSY PCB EEPROM; 0x54,RF9000D,DA92-01763B | SA | 1 |

5. DOOR REF LEFT

DOOR REF LEFT

Exploded View

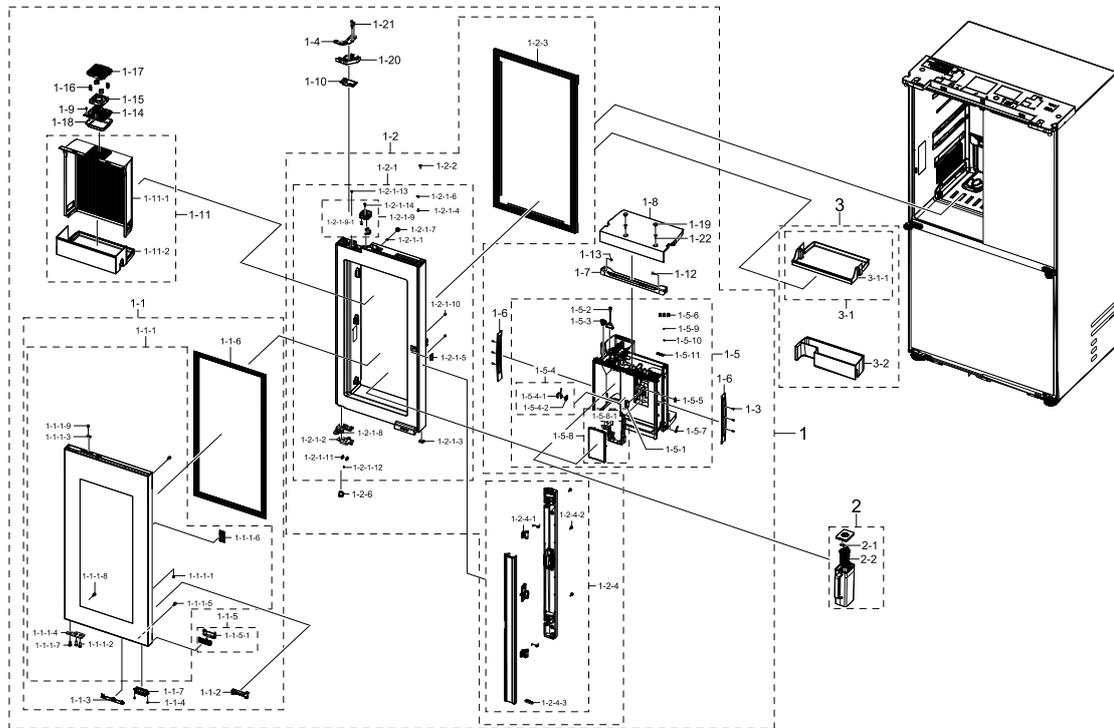

Parts List

| No. | Lvl. | Loc. | Material Code | Description & Specification | SNA | Qty. |
|---------|------|-------|---------------|---|-----|------|
| 1 | 2 | | DA93-01447F | ASSY DOOR SUB-REF LEFT; RF9000D,FDSR,INST | SNA | 1 |
| 1-1 | 3 | | DA93-01445C | ASSY DOOR SUB-REF OUT LEFT; RF9000D,INSTA | SA | 1 |
| 1-1-1 | 4 | | DA91-06338C | ASSY DOOR FOAM-REF OUT LEFT; RF9000D,INST | SNA | 1 |
| 1-1-1-1 | 5 | G0412 | 6002-001547 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L10,M4,F | SA | 1 |
| 1-1-1-2 | 5 | A0848 | 6001-000570 | SCREW-MACHINE; SWRCH18A,ZPC(WHT),L16,M5,F | SA | 2 |
| 1-1-1-3 | 5 | A0534 | DA61-03769A | MAGNET-A; HERMES,FERRITE,T5,-,-,1600Gau | SA | 1 |
| 1-1-1-4 | 5 | | DA61-13384A | STOPPER DOOR-REF LOW; RF9000R,PO-SPHC,T4, | SA | 1 |
| 1-1-1-5 | 5 | | DA63-02750B | GROMMET-COVER SLIDE; QUEEN09,Si,BLACK,-,- | SA | 2 |
| 1-1-1-6 | 5 | | DA63-09537A | COVER LOCK; RF9000R,ABS,T2.5,INOX GRAY,AB | SA | 1 |
| 1-1-1-7 | 5 | A0827 | DA63-11920A | GROMMET HINGE; RF9000C,PA66+GF15%,BLACK,- | SA | 1 |
| 1-1-1-8 | 5 | | DA63-09942A | GROMMET DOOR; RF9000T,Si,BLACK,-,-,W11.4, | SA | 1 |
| 1-1-1-9 | 5 | | DA67-02795C | CAP-SHAFT HOLE; AW3,ABS,-,-,HG-0760GP,SNO | SA | 2 |
| 1-1-2 | 4 | A0944 | DA63-12130A | COVER SENSOR; RF9000D,ABS,T2,-,EBONY BLAC | SA | 1 |
| 1-1-3 | 4 | | DA63-12129A | COVER CAP DOOR; RF9000D,ABS,T2,-,EBONY BL | SA | 1 |
| 1-1-4 | 4 | G0412 | 6002-001122 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L14,M4,F | SC | 3 |
| 1-1-5 | 4 | | DA97-24358A | ASSY CASE SENSOR; RF9000C,TOF SENSOR | SA | 1 |

Exploded Views and Parts List


| No. | Lvl. | Loc. | Material Code | Description & Specification | SNA | Qty. |
|-----------|------|-------|---------------|--|-----|------|
| 1-1-5-1 | 5 | | DA61-15749A | CASE SENSOR-REF; RF9000C,ABS,T2,EBONY BLA | SA | 1 |
| 1-1-6 | 4 | | DA97-20057A | ASSY GASKET; RF9000R,DARK GRAY | SA | 1 |
| 1-1-7 | 4 | | DA97-24974A | ASSY CASE PCB; RF9000D,AOD Touch sensor | SA | 1 |
| 1-2 | 3 | | DA93-01441F | ASSY DOOR SUB-REF IN LEFT DOOR MODULE; RF | SNA | 1 |
| 1-2-1 | 4 | | DA91-06350F | ASSY DOOR FOAM-REF IN LEFT; RF9000D,INSTA | SA | 1 |
| 1-2-1-1 | 5 | A0837 | 6021-000258 | NUT-HEXAGON; STS304,ZPC(YEL),3C,M5 | SA | 1 |
| 1-2-1-2 | 5 | | DA61-14211B | STOPPER DOOR-LEFT; RF9000T/RF9900T,PO-SPH | SA | 1 |
| 1-2-1-3 | 5 | | DA63-09933A | GROMMET-CAP DOOR; RF9900T,Si,BLACK,-,-,T5 | SA | 1 |
| 1-2-1-4 | 5 | G0412 | 6002-000215 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L16,M4,T | SA | 5 |
| 1-2-1-5 | 5 | | DA66-01342A | LEVER; RF9000R,POM,W30,L50,SO301,CREAMY S | SA | 1 |
| 1-2-1-6 | 5 | A0848 | 6001-000715 | SCREW-MACHINE; SWRCH18A,ZPC(WHT),L16,M5,T | SA | 1 |
| 1-2-1-7 | 5 | | DA97-20572A | ASSY FIXER-UP; RF9000R(B),BLACK | SA | 1 |
| 1-2-1-8 | 5 | | DA97-21336B | ASSY HINGE-LOW LEFT; RF9000C,T4,BLACK,OUT | SA | 1 |
| 1-2-1-9 | 5 | | DA97-24557A | ASSY LEVER AUTO CLOSE; RF9000CC,LEFT MODU | SA | 1 |
| 1-2-1-9-1 | 6 | G0412 | 6002-001122 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L14,M4,F | SC | 1 |
| 1-2-1-10 | 5 | G0412 | 6002-000239 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L8,M4,TH | SA | 3 |
| 1-2-1-11 | 5 | G0020 | 6009-001475 | SCREW-SPECIAL; FH,+,M5,L25(15.5),ZPC(WHT) | SA | 4 |
| 1-2-1-12 | 5 | G0412 | 6002-001547 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L10,M4,F | SA | 1 |
| 1-2-1-13 | 5 | G0412 | 6002-001122 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L14,M4,F | SC | 1 |
| 1-2-1-14 | 5 | G0412 | 6002-000613 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L16,M5,T | SA | 1 |
| 1-2-2 | 4 | G0412 | 6002-001406 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T | SA | 2 |
| 1-2-3 | 4 | | DA97-23368A | ASSY GASKET-REF; RF9000B | SA | 1 |
| 1-2-4 | 4 | | DA97-22990A | ASSY FRENCH; RF9000A,COOL WHITE, 230V, AD | SA | 1 |
| 1-2-4-1 | 5 | M0190 | DA61-08305A | HINGE FRENCH; AW4,PC,T2,COOL WHITE,HF-102 | SA | 2 |
| 1-2-4-2 | 5 | G0531 | DA63-02750A | GROMMET-COVER SLIDE; ET05-PJT,Si,WHITE,-, | SA | 3 |
| 1-2-4-3 | 5 | | DA63-11581A | GASKET FRENCH-LOW; RF9000A,Si,-,T0.8,-,-, | SA | 1 |
| 1-2-6 | 4 | | DA66-01714A | CAM RISER-UP LEFT; RF9000D,PA66,-,BLACK,- | SA | 1 |
| 1-3 | 3 | G0412 | 6002-001547 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L10,M4,F | SA | 7 |
| 1-4 | 3 | | DA97-24198A | ASSY HINGE-UP LEFT; RF9000C,T4,BLACK,OUT | SA | 1 |
| 1-5 | 3 | | DA97-17399U | ASSY CASE INNER; RF7000AC,BSC LED 1EA | SA | 1 |
| 1-5-1 | 4 | A0842 | 3405-001117 | SWITCH-MICRO; 125/250VAC,1A,80gf,SPST-NO | SA | 1 |
| 1-5-2 | 4 | | DA34-00043M | SWITCH REED; UL1007 AWG 22,L100 | SA | 1 |
| 1-5-3 | 4 | | DA60-00403A | FITTING TUBE; POM,ID1/4,NATURAL,F20-03,OD | SA | 1 |
| 1-5-4 | 4 | | DA97-22004A | ASSY LED LAMP; RF9000A,Beverage Show Case | SA | 1 |
| 1-5-4-1 | 5 | | DA61-07581A | CASE LAMP-LED; POLARIS,GPPS,20.4,20.4,TP | SA | 1 |
| 1-5-4-2 | 5 | | DA63-06505A | COVER LAMP-LED; POLARIS,MABS,HB,NATURAL,T | SA | 1 |
| 1-5-5 | 4 | G0407 | DA61-13987A | CASE DISPENSER; RS5000T,STS304,T0.5,-,-,- | SA | 1 |
| 1-5-6 | 4 | | DA61-15114A | CLIP; RF6000T,POM,T2,NATURAL,-,F20-03,LOC | SA | 3 |
| 1-5-7 | 4 | | DA67-04504D | CAP FIXER-TUBE; RR9000A,Si,T3,DARK GRAY | SA | 1 |

| No. | Lvl. | Loc. | Material Code | Description & Specification | SNA | Qty. |
|---------|------|-------|---------------|--|-----|------|
| 1-5-8 | 4 | | DA97-17297F | ASSY LEVER DISPENSER; RF9000A,NO PRINT, U | SA | 1 |
| 1-5-8-1 | 5 | | DA61-16266A | SPRING; RF9000A,STS304,-,T0.3,-,-,- | SA | 1 |
| 1-5-9 | 4 | G0412 | 6002-000217 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L8,M4,TH | SA | 1 |
| 1-5-10 | 4 | G0412 | 6002-001547 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L10,M4,F | SA | 1 |
| 1-5-11 | 4 | | DA61-11032A | FIXER; RT5000K,PA66,WHITE,KN3322V0,7P Ret | SA | 1 |
| 1-6 | 3 | | DA61-14660A | REINF-REF; RF9000A,GI-SGCC,T1.6,BSC | SA | 2 |
| 1-7 | 3 | | DA61-14659A | REINF-REF; RF7000AC,GI-SGCC,T2,-,-,-,BSC, | SA | 1 |
| 1-8 | 3 | | DA97-21788A | ASSY COVER BASKET; RF9000A,BSC Display | SA | 1 |
| 1-9 | 3 | G0412 | 6002-001406 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T | SA | 2 |
| 1-10 | 3 | | DA63-12138A | COVER WIRE-LEFT; RF9000D,ABS,T2,-,INOX GR | SA | 1 |
| 1-11 | 3 | | DA97-24156A | ASSY COVER; RF9000C,TP GRAY,CONCEPT ZONE | SNA | 1 |
| 1-11-1 | 4 | | DA63-11928A | COVER GUARD-REF; RF9000C,GPPS,T3,-,TP GRA | SA | 1 |
| 1-11-2 | 4 | | DA63-11929A | GUARD-REF MIDDLE; RF9000C,SAN,T3,TP GRAY, | SA | 1 |
| 1-12 | 3 | G0412 | 6002-000244 | SCREW-TAPPING; SWRCH18A,ZPC,L16,M5,TH,+ ,B | SA | 1 |
| 1-13 | 3 | A0848 | 6001-000715 | SCREW-MACHINE; SWRCH18A,ZPC(WHT),L16,M5,T | SA | 1 |
| 1-14 | 3 | | DA61-15761A | CASE FAN-REF; RF9000C,ABS,T2,COOL WHITE,- | SA | 1 |
| 1-15 | 3 | | DA31-00070H | MOTOR BLDC FAN; U66R12MS7AB-52K09,2600rpm | SA | 1 |
| 1-16 | 3 | A0687 | DA63-02513A | GROMMET-FAN; USP,NBR,-,- | SA | 4 |
| 1-17 | 3 | A1250 | DA63-11937A | COVER-FAN; RF9000C,ABS,T2,-,COOL WHITE,-, | SA | 1 |
| 1-18 | 3 | | DA63-11942A | COVER-UNIT; RF9000C,ABS,T2,-,COOL WHITE,- | SA | 1 |
| 1-19 | 3 | | DA67-30266Q | CAP SCREW; RF9000A,PP,T1.5,-,BJ750,NEO VI | SA | 2 |
| 1-20 | 3 | | DA63-11948A | COVER HINGE-UP LEFT; RF9000C,ABS,-,-,INOX | SA | 1 |
| 1-21 | 3 | A0848 | 6001-000570 | SCREW-MACHINE; SWRCH18A,ZPC(WHT),L16,M5,F | SA | 3 |
| 1-22 | 3 | G0412 | 6002-000215 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L16,M4,T | SA | 9 |
| 2 | 2 | | DA97-21261H | ASSY CASE WATER FILTER; RF9000A,INDIA | SA | 1 |
| 2-1 | 3 | M0485 | DA61-02738A | ASSY MAGNET; CORE-PJT,FERRITE,-,- | SA | 1 |
| 2-2 | 3 | A1259 | DA61-15091A | CASE FILTER; RF9000A,GPPS,T2.5,TP GRAY,G- | SA | 1 |
| 3 | 2 | | DA97-24907A | ASSY GUARD PACKING; RF9000D,TP GRAY,SEE-T | SNA | 1 |
| 3-1 | 3 | | DA97-24157A | ASSY GUARD-REF UP; RF9000C,TP GRAY | SA | 1 |
| 3-1-1 | 4 | M0447 | DA63-11930A | GUARD-REF UP; RF9000C,GPPS,T3,TP GRAY,-,- | SA | 1 |
| 3-2 | 3 | G0400 | DA97-21914A | ASSY GUARD-REF LOW; RF9000A,TP GRAY,BSC S | SA | 1 |

6. DOOR REF RIGHT

DOOR REF RIGHT

Exploded View

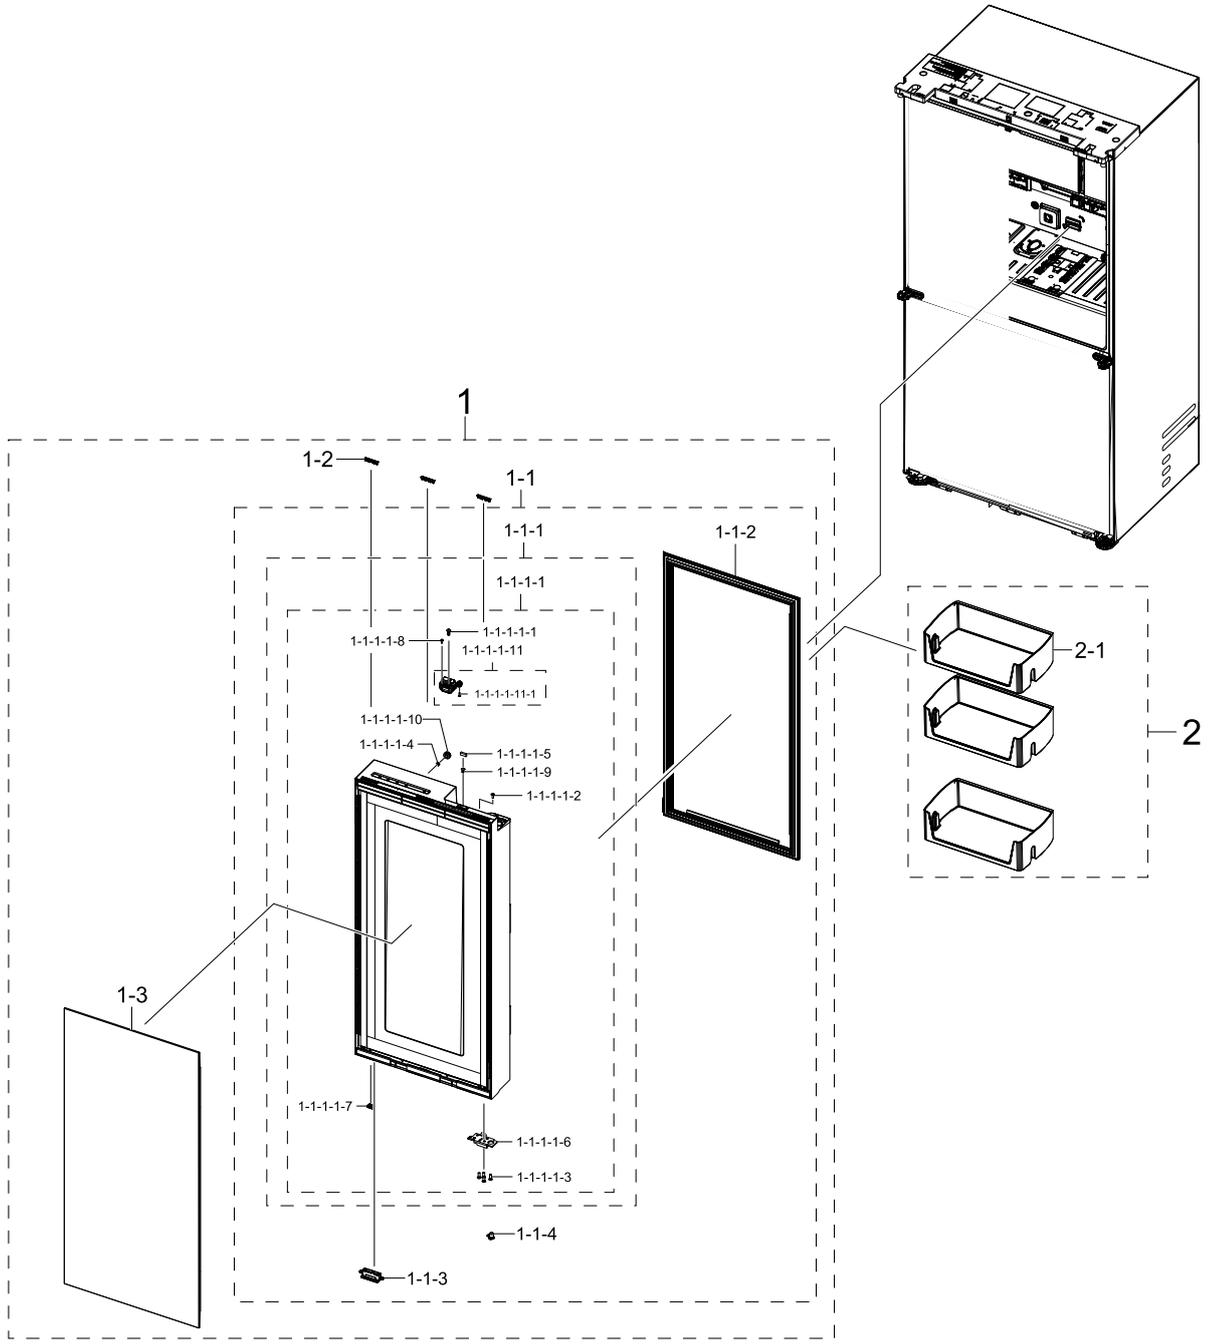


Parts List

| No. | Lvl. | Loc. | Material Code | Description & Specification | SNA | Qty. |
|--------------|------|-------|---------------|--|-----|------|
| 1 | 2 | | DA93-01563X | ASSY DOOR SUB-REF RIGHT; RF9000D,22(CLEAN | SNA | 1 |
| 1-1 | 3 | | DA93-00945V | ASSY DOOR SUB-REF RIGHT DOOR MODULE; RF90 | SNA | 1 |
| 1-1-1 | 4 | | DA91-05489U | ASSY DOOR FOAM-REF RIGHT; RF9000D,VIP(18T | SA | 1 |
| 1-1-1-1 | 5 | | DA97-21155V | ASSY PLATE DOOR-REF RIGHT; RF9000D,VIP(18 | SNA | 1 |
| 1-1-1-1-1 | 6 | G0412 | 6002-000613 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L16,M5,T | SA | 1 |
| 1-1-1-1-2 | 6 | G0412 | 6002-001122 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L14,M4,F | SC | 1 |
| 1-1-1-1-3 | 6 | G0020 | 6009-001475 | SCREW-SPECIAL; FH,+,M5,L25(15.5),ZPC(WHT) | SA | 4 |
| 1-1-1-1-4 | 6 | A0837 | 6021-000258 | NUT-HEXAGON; STS304,ZPC(YEL),3C,M5 | SA | 1 |
| 1-1-1-1-5 | 6 | A0534 | DA61-03769A | MAGNET-A; HERMES,FERRITE,T5,-,-,1600Gau | SA | 1 |
| 1-1-1-1-6 | 6 | | DA61-14210B | STOPPER DOOR-RIGHT; RF9000T/RF9900T,PO-SP | SA | 1 |
| 1-1-1-1-7 | 6 | | DA63-09933A | GROMMET-CAP DOOR; RF9900T,Si,BLACK,-,-,T5 | SA | 1 |
| 1-1-1-1-8 | 6 | G0412 | 6002-001306 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L14,M4,T | SA | 1 |
| 1-1-1-1-9 | 6 | | DA67-02795C | CAP-SHAFT HOLE; AW3,ABS,-,-,HG-0760GP,SNO | SA | 1 |
| 1-1-1-1-10 | 6 | | DA97-20572A | ASSY FIXER-UP; RF9000R(B),BLACK | SA | 1 |
| 1-1-1-1-11 | 6 | | DA97-24558A | ASSY LEVER AUTO CLOSE; RF9000CC,RIGHT MOD | SA | 1 |
| 1-1-1-1-11-1 | 7 | G0412 | 6002-001122 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L14,M4,F | SC | 1 |
| 1-1-2 | 4 | | DA97-23368A | ASSY GASKET-REF; RF9000B | SA | 1 |
| 1-1-3 | 4 | | DA97-24974A | ASSY CASE PCB; RF9000D,AOD Touch sensor | SA | 1 |
| 1-1-4 | 4 | | DA66-01715A | CAM RISER-UP RIGHT; RF9000D,PA66,-,BLACK, | SA | 1 |
| 1-2 | 3 | | DA63-09686A | COVER CAP DOOR; ABS,T1.5,DARK GRAY,RM-076 | SA | 3 |
| 1-3 | 3 | | DA99-05088A | ASSY ACCESSORY-CUSTOM PANEL; RF9000A(B),C | SA | 1 |
| 2 | 2 | | DA97-24907A | ASSY GUARD PACKING; RF9000D,TP GRAY,SEE-T | SNA | 1 |
| 2-1 | 3 | | DA97-21912A | ASSY GUARD-REF; RF9000A,TP GRAY,BASIC | SA | 3 |

7. DOOR FRE LEFT

DOOR FRE LEFT

Exploded View

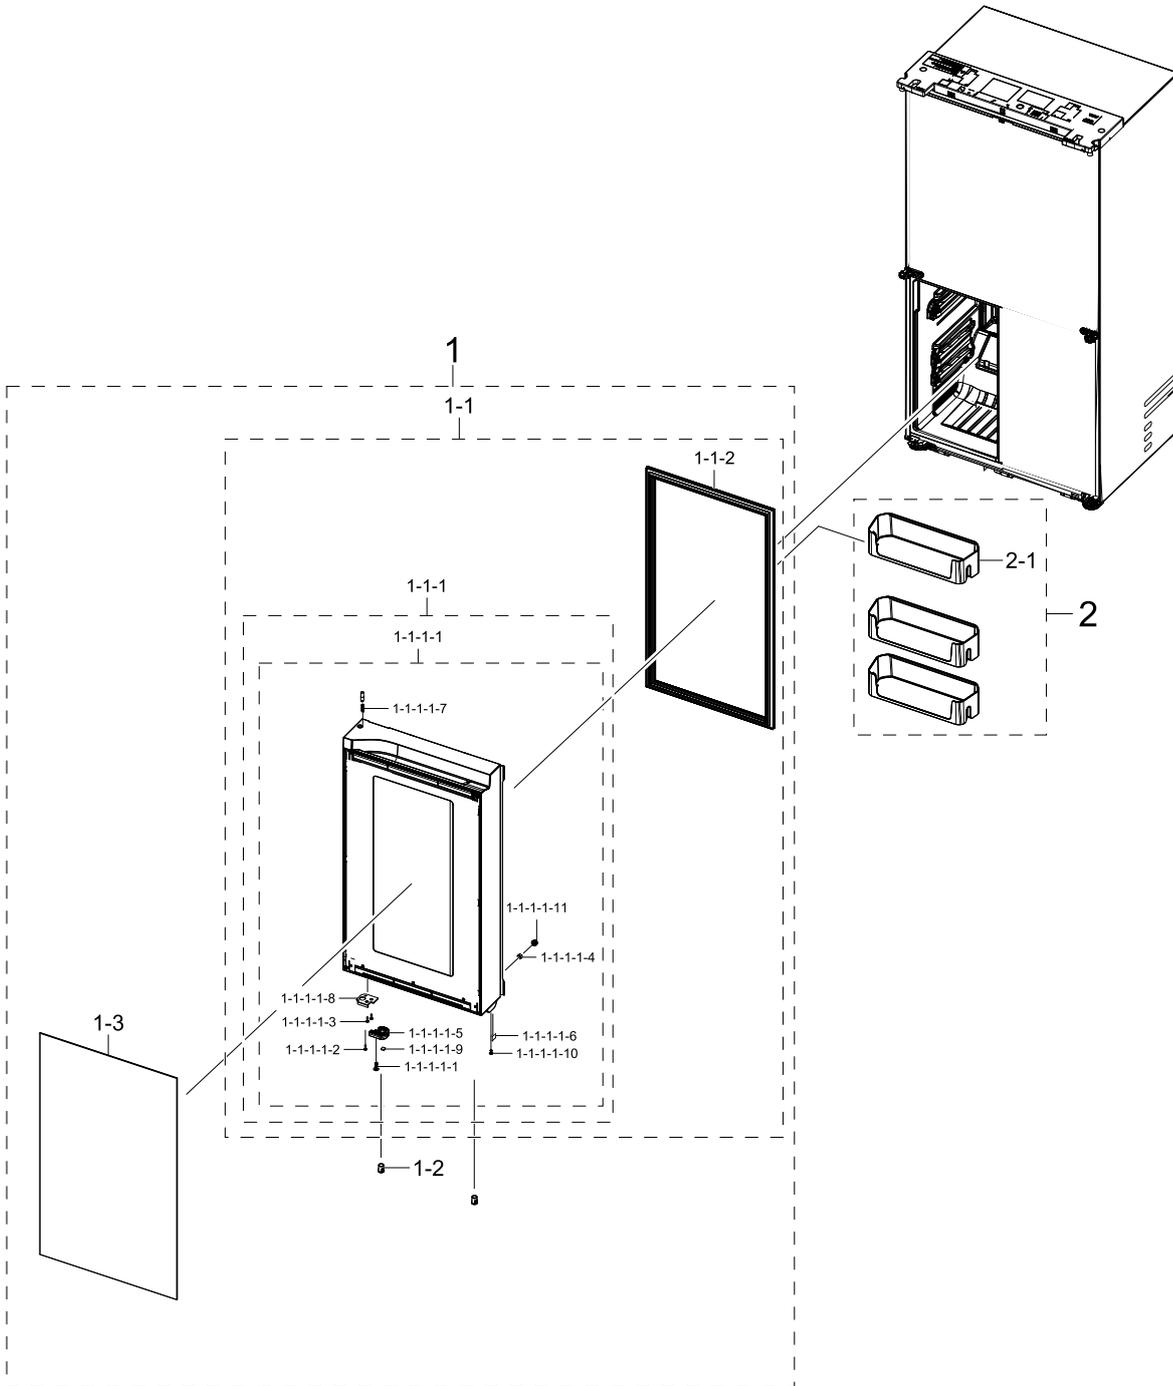

Parts List

| No. | Lvl. | Loc. | Material Code | Description & Specification | SNA | Qty. |
|------------|------|-------|---------------|--|-----|------|
| 1 | 2 | | DA93-01316P | ASSY DOOR SUB-FRE LEFT; RF9000D,22(CLEAN | SNA | 1 |
| 1-1 | 3 | | DA93-00943K | ASSY DOOR SUB-FRE LEFT DOOR MODULE; RF900 | SNA | 1 |
| 1-1-1 | 4 | | DA91-05346X | ASSY DOOR FOAM-FRE LEFT; RF9000D,AP(PANEL | SA | 1 |
| 1-1-1-1 | 5 | | DA97-21156V | ASSY PLATE DOOR-FRE LEFT; RF9000D,NO TRIM | SNA | 1 |
| 1-1-1-1-1 | 6 | G0412 | 6002-000613 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L16,M5,T | SA | 1 |
| 1-1-1-1-2 | 6 | G0412 | 6002-001120 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L18,M4,F | SA | 1 |
| 1-1-1-1-3 | 6 | G0412 | 6002-001669 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L20,M5,F | SA | 2 |
| 1-1-1-1-4 | 6 | A0837 | 6021-000258 | NUT-HEXAGON; STS304,ZPC(YEL),3C,M5 | SA | 1 |
| 1-1-1-1-5 | 6 | | DA61-15273A | SUPPORT DOOR-CLOSE; RF9000B,PK,-,M33R3A00 | SA | 1 |
| 1-1-1-1-6 | 6 | A0534 | DA61-03769B | MAGNET; SVETA,FERRITE,-,-,-,1600Gauss | SA | 1 |
| 1-1-1-1-7 | 6 | G0222 | DA61-05366A | SPRING ETC-HANDLE; SVETA-PJT,STS304,ID5.4 | SA | 1 |
| 1-1-1-1-8 | 6 | | DA61-08816A | STOPPER DOOR-L; ROMANEE CONTI,PO-SPHC,T2. | SA | 1 |
| 1-1-1-1-9 | 6 | M0180 | DA63-40294A | GROMMET-STOPPER; T3XW8XL8,PP+TD20%,NATURA | SA | 1 |
| 1-1-1-1-10 | 6 | | DA67-02795C | CAP-SHAFT HOLE; AW3,ABS,-,-,HG-0760GP,SNO | SA | 1 |
| 1-1-1-1-11 | 6 | | DA97-20572A | ASSY FIXER-UP; RF9000R(B),BLACK | SA | 1 |
| 1-1-2 | 4 | | DA97-23369A | ASSY GASKET-FRE; RF9000B | SA | 1 |
| 1-2 | 3 | | DA67-04961A | CAP SCREW; RQ9500(B),ABS,RM-0760,DARK GRA | SA | 2 |
| 1-3 | 3 | | DA99-05088B | ASSY ACCESSORY-CUSTOM PANEL; RF9000A(B),C | SA | 1 |
| 2 | 2 | | DA97-23375B | ASSY SHELF-SLIDE FRE SHELF MODULE; RF9000 | SNA | 1 |
| 2-1 | 3 | | DA97-19996E | ASSY GUARD-FRE; RF9000A,TP GRAY,India | SA | 3 |

Parts List

| No. | Lvl. | Loc. | Material Code | Description & Specification | SNA | Qty. |
|------------|------|-------|---------------|--|-----|------|
| 1 | 2 | | DA93-01317Q | ASSY DOOR SUB-FRE RIGHT; RF9000D,22(CLEAN | SNA | 1 |
| 1-1 | 3 | | DA93-00942K | ASSY DOOR SUB-FRE RIGHT DOOR MODULE; RF90 | SNA | 1 |
| 1-1-1 | 4 | | DA91-05347X | ASSY DOOR FOAM-FRE RIGHT; RF9000D,AP(PANE | SA | 1 |
| 1-1-1-1 | 5 | | DA97-21157V | ASSY PLATE DOOR-FRE RIGHT; RF9000D,NO TRI | SNA | 1 |
| 1-1-1-1-1 | 6 | G0412 | 6002-000613 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L16,M5,T | SA | 1 |
| 1-1-1-1-2 | 6 | G0412 | 6002-001120 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L18,M4,F | SA | 1 |
| 1-1-1-1-3 | 6 | G0412 | 6002-001669 | SCREW-TAPPING; SWRCH18A,ZPC(WHT),L20,M5,F | SA | 2 |
| 1-1-1-1-4 | 6 | A0837 | 6021-000258 | NUT-HEXAGON; STS304,ZPC(YEL),3C,M5 | SA | 1 |
| 1-1-1-1-5 | 6 | G0222 | DA61-05366A | SPRING ETC-HANDLE; SVETA-PJT,STS304,ID5.4 | SA | 1 |
| 1-1-1-1-6 | 6 | | DA61-08817A | STOPPER DOOR-R; ROMANEE CONTI,PO-SPHC,T2. | SA | 1 |
| 1-1-1-1-7 | 6 | | DA61-15273A | SUPPORT DOOR-CLOSE; RF9000B,PK,-,M33R3A00 | SA | 1 |
| 1-1-1-1-8 | 6 | M0180 | DA63-40294A | GROMMET-STOPPER; T3XW8XL8,PP+TD20%,NATURA | SA | 1 |
| 1-1-1-1-9 | 6 | | DA97-20572A | ASSY FIXER-UP; RF9000R(B),BLACK | SA | 1 |
| 1-1-1-1-10 | 6 | | DA34-00043L | SWITCH REED; UL1007 AWG 22,L100 | SA | 1 |
| 1-1-2 | 4 | | DA97-23369A | ASSY GASKET-FRE; RF9000B | SA | 1 |
| 1-2 | 3 | | DA67-04961A | CAP SCREW; RQ9500(B),ABS,RM-0760,DARK GRA | SA | 2 |
| 1-3 | 3 | | DA99-05088B | ASSY ACCESSORY-CUSTOM PANEL; RF9000A(B),C | SA | 1 |
| 2 | 2 | | DA97-23375B | ASSY SHELF-SLIDE FRE SHELF MODULE; RF9000 | SNA | 1 |
| 2-1 | 3 | | DA97-19996E | ASSY GUARD-FRE; RF9000A,TP GRAY,India | SA | 3 |