

1. EXPLODED VIEWS AND PARTS LIST

[MATERIAL CODE STANDARDS]

Material codes and names and their respective naming rules are managed in accordance with the prescribed standards. Please refer to these standards when requesting a material.

1. Material Code Type

● : Number

■ : Letter (Alphabet)


Type 1	● ● ● ● - ● ● ● ● ● ex) 6006-001174 SCREW-TAPPING	Enterprise-wide parts Type 1 materials can be used for all Samsung Electronics products. (Most electrical parts belong to this type.)
Type 2	■ ■ ● ● - ● ● ● ● ■ ex) DC96-01390A ASSY-CONTROL	Division-wide parts (DC**-Washing machine) Type 2 materials can be used for specific products. (Most instruments and tools belong to this type.)

2. Ass'y Materials

All ass'y material codes start with DC9*.

An ass'y material is created by combining more than two materials. If a requested material cannot be provided, you can request an ass'y material that contains that material.


1. MAIN

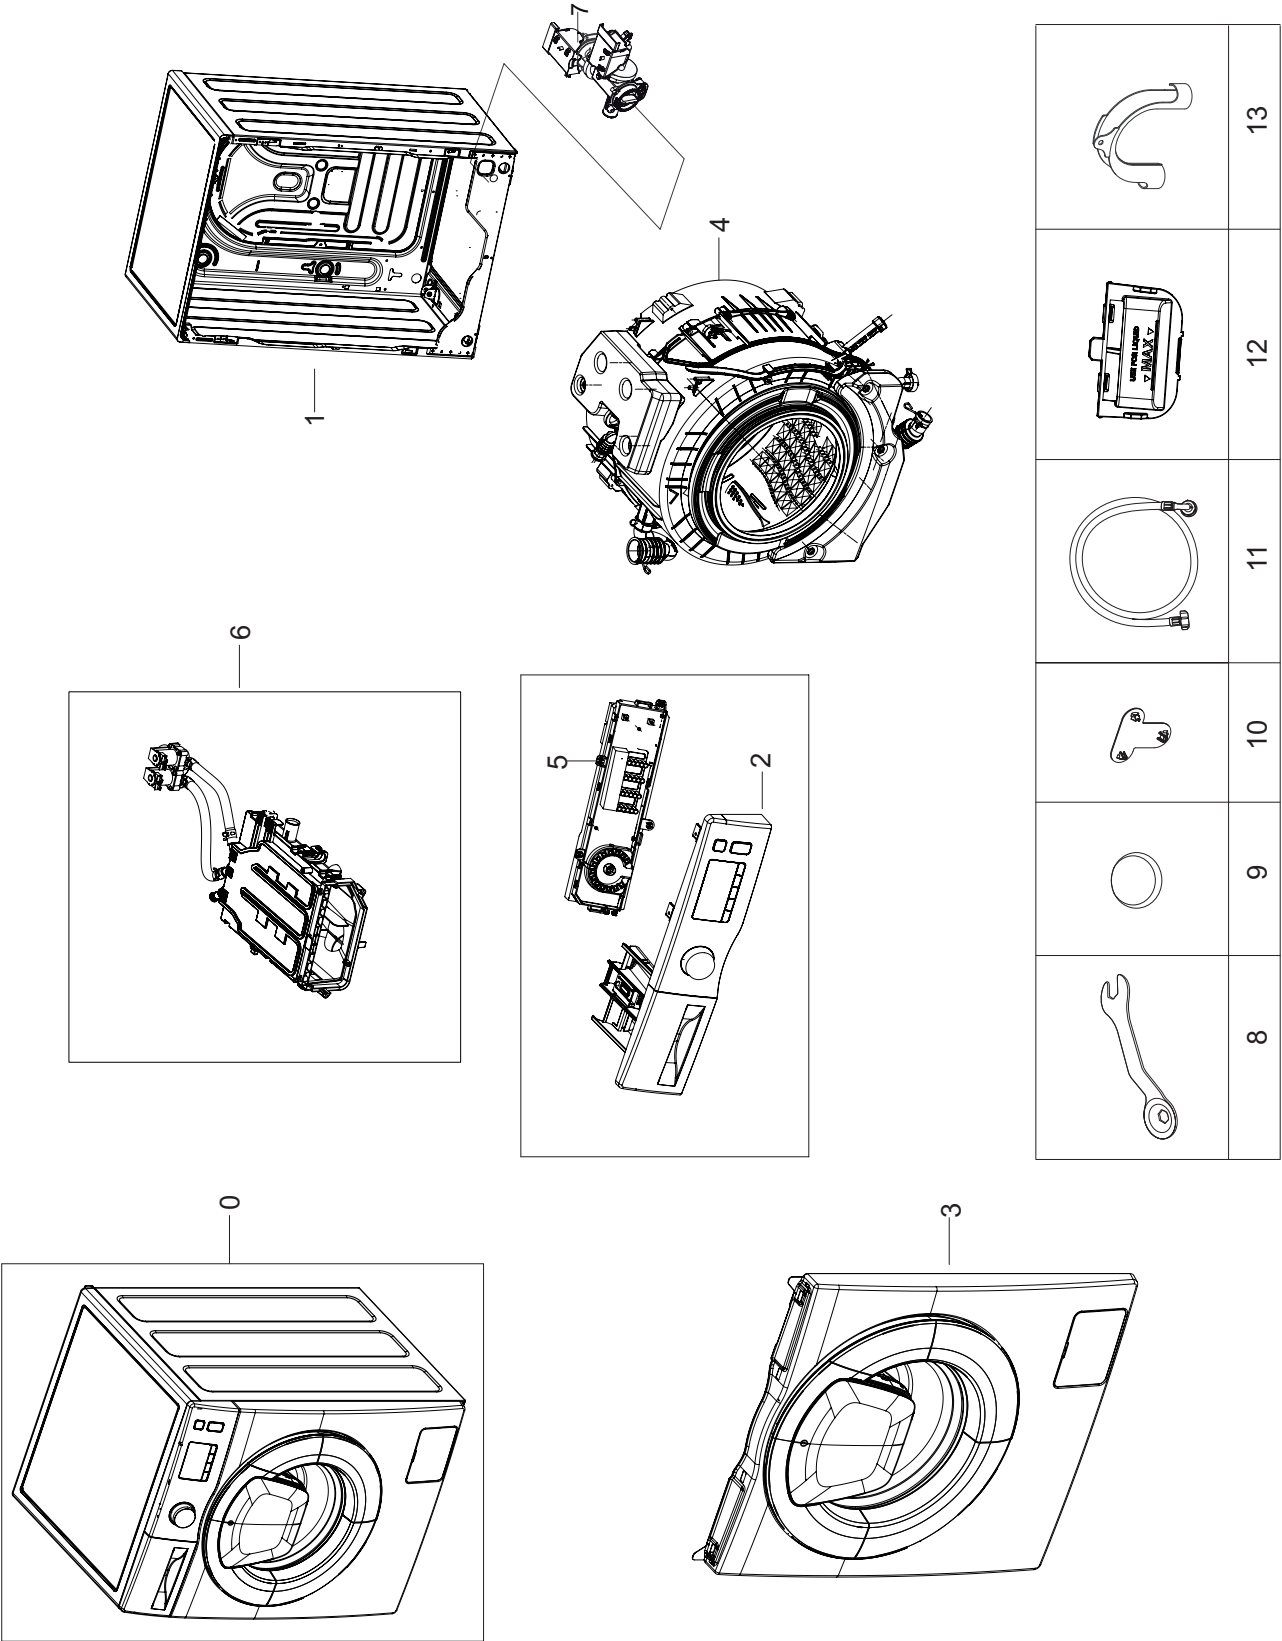

MODEL CODE: WW80K5210VW/SHService Bom (**SA**: SERVICE AVAILABLE, **SNA**: SERVICE NOT AVAILABLE)

SVC Code	Code No.	Description	Specification	QTY	Un	SA/SNA
0	-	WW80K5210VW/SH	-	1	-	-
1	-	FRAME & COVER PARTS	-	1	-	-
2	-	PANEL-CONTROL & DRAWER		1	-	-
3	-	FRAME FRONT & DOOR	-	1	-	-
4	-	ASSY TUB&DRUM	-	1	-	-
5	DC92-01923B	ASSY PCB DISPLAY	FWM_DIM,WW5500K VOLGA,3	1	PC	SA
6	DC97-19242A	ASSY HOUSING DRAWER	SLIM VOLGA,8kg	1	PC	SA
7	DC97-16441E	ASSY PUMP DRAIN	WD7100JC,Bubble,220V-240	1	PC	SNA
8	DC60-00104A	FASTENER-BOLT	ALL,CR,OD36,2.5,L113.5	1	PC	SA
9	DC67-00307A	CAP-FIXER	WF438AAC/XAA,PP,T1.5,RECYCLE,B	1	PC	SA
10	DC67-00208B	CAP-FIXER	WF8602NHS/XFA,PP,T1.5,P535-H,B	1	PC	SA
11	DC97-16921A	ASSY HOSE WATER	WA5700J	1	PC	SC
12	DC61-03510A	GUIDE LIQUID	WF-F500E,PP,MT43,Honesty BI	1	PC	SA
13	DC62-10278A	HOSE HANGER	PUMP MODEL,PP,BLACK	1	PC	SA

2. FRAME & COVER PARTS

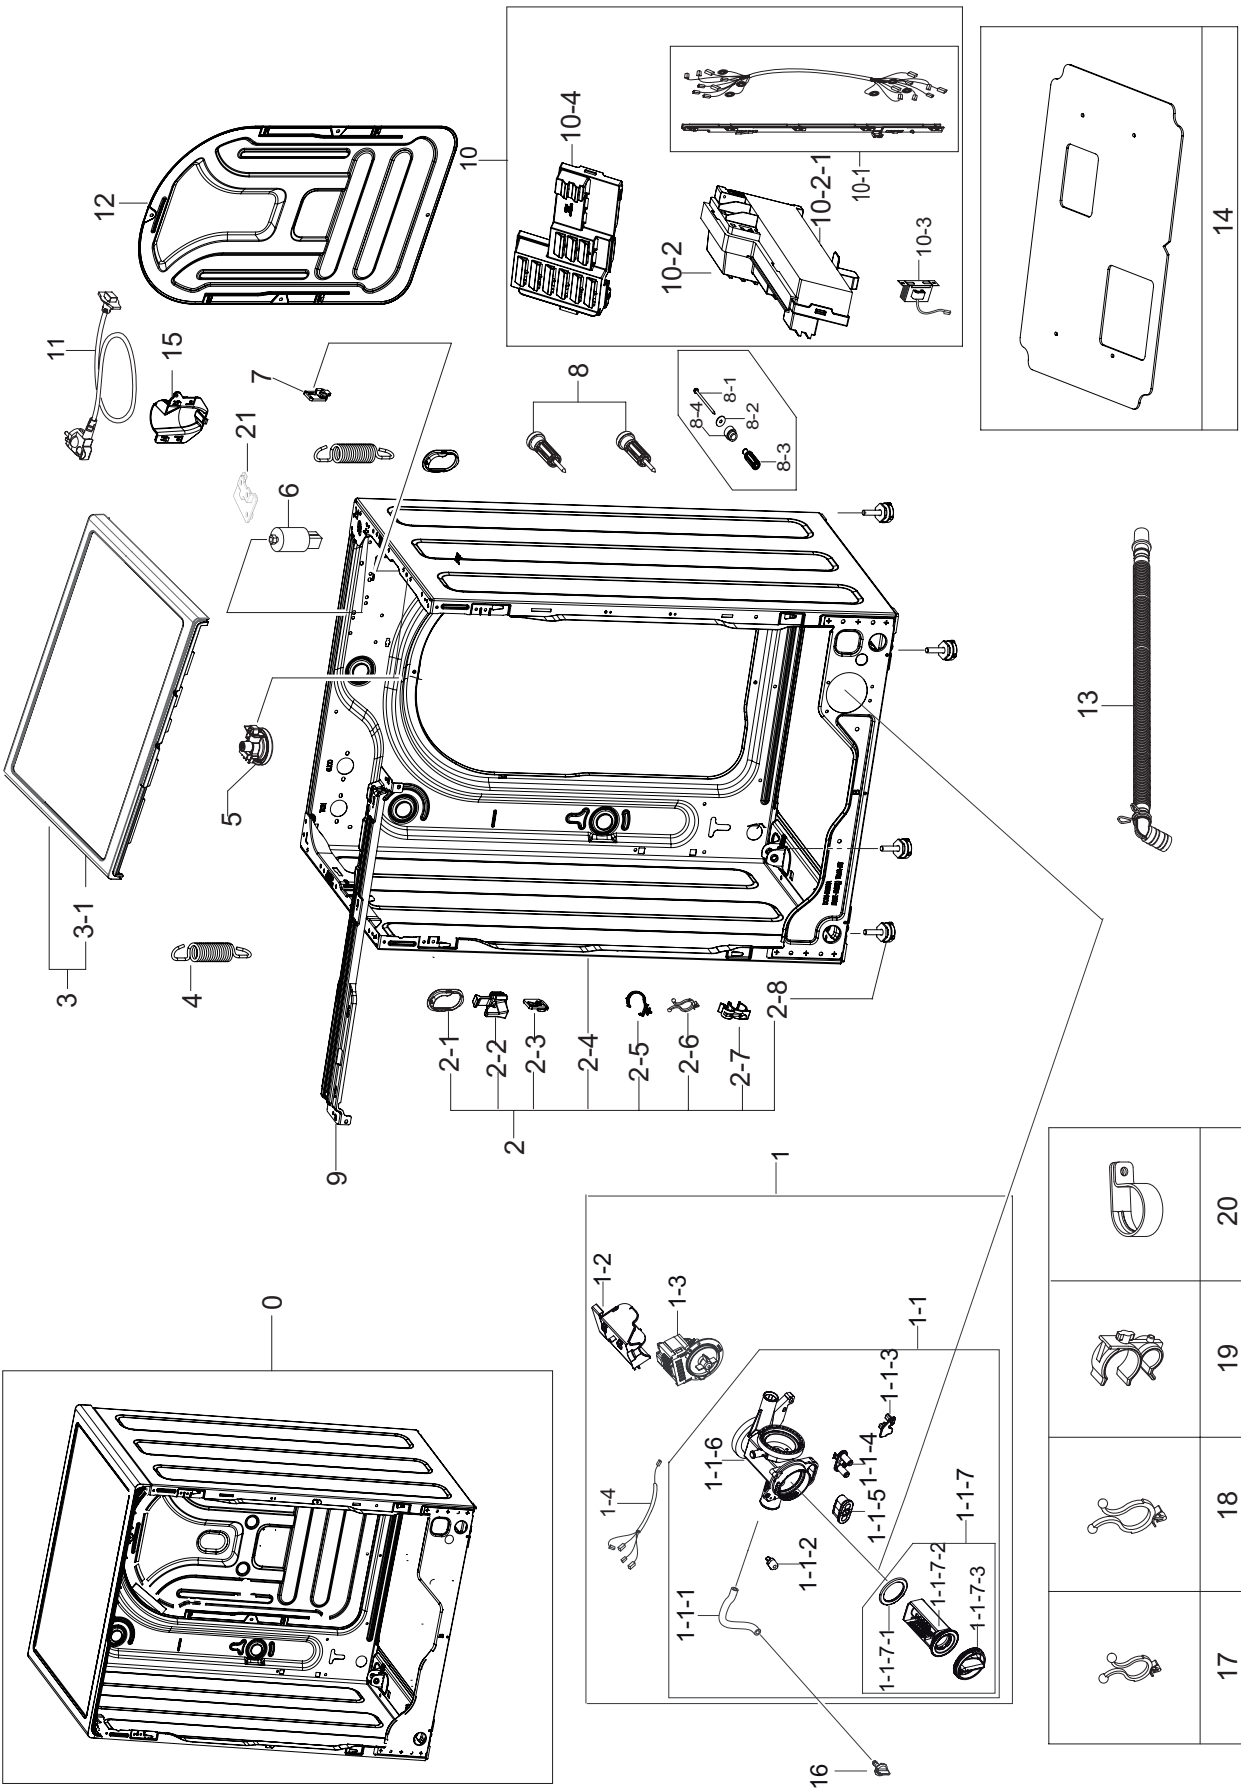

MODEL CODE: WW80K5210VW/SH

Service Bom (SA: SERVICE AVAILABLE, SNA: SERVICE NOT AVAILABLE)

SVC Code	Code No.	Description	Specification	QTY	Un	SA/SNA
0	-	FRAME&COVER PARTS	-	1	-	-
1	DC97-16441E	ASSY PUMP DRAIN	WD7100JC,Bubble,220V-240	1	PC	SNA
1-1	DC97-15865C	ASSY CASE FILTER	WW7100J,WW80J7260GW/SC,	1	PC	SA
1-1-2	DC63-00955A	PACKING-PUMP	AEGIS,EPDM,W26.3,L13.2,H14.	1	PC	SA
1-1-3	DC63-01102A	CUSHION PUMP-LEFT	AEGIS 3-PJT,EPDM,-,BLA	1	PC	SNA
1-1-4	DC61-02221A	GUIDE CUSHION	AEGIS,FRPP,HLG41S,NTR	1	PC	SNA
1-1-5	DC69-01232A	PACKING-PUMP	AEGIS,EPDM,-,-,W45,L22,H22	1	PC	SA
1-1-6	DC61-02505A	CASE PUMP	BAIKAL-PJT,PP,NEAT WHITE,TB53,	1	PC	SA
1-1-7	DC97-15695C	ASSY FILTER	Heba,WF9904CWN1	1	PC	SA
1-1-7-1	DC73-00022A	SEAL PACKING	SEW-HVR149ATA,EPDM,BLK,-	1	PC	SA
1-1-7-2	DC63-00998A	FILTER PUMP	SCOUT-PJT,PP,-,NEAT WHITE,BU	1	PC	SA
1-1-7-3	DC64-02783A	HANDLE FILTER	WF350ANW/XAA,PP,T2.3,W63.8	1	PC	SA
1-2	DC63-01610A	COVER PUMP	WF8500NHX-XSC,PP,T2.1,V0,WHIT	2	PC	SA
1-3	DC31-00030H	PUMP-DRAIN	220V-240V,50Hz,30W,18L/min	2	PC	SA
1-4	DC96-01567C	ASSY WIRE HARNESS	AEGIS 3- PJT,WF0702WKN	1	PC	SA
2	DC97-19270D	ASSY PAINT FRAME	WW6500K VOLGA,WW70K6210	1	PC	SA
2-1	DC61-03022A	GUIDE SPRING	WF1802XEU,POM,T3.5,-,F20-03	2	PC	SA
2-2	DC61-01901A	GUIDE FRAME FRONT	ALL MODEL,POM,T5.5,K30	2	PC	SNA
2-3	DC61-02121A	GUIDE HOSE	WF8500NMW,PP,T1.5,-,NATURAL,A	1	PC	SNA
2-4	DC97-19269A	ASSY FRAME	WW6000J VOLGA,WW80J6210DW/SC,	1	PC	SNA
2-5	DC61-02879A	HOLDER WIRE	WF8804CPA,PA,-,NATURAL,-,211	1	PC	SNA
2-6	DC61-40081A	HOLDER WIRE	DAWH-2NC,PA66,-,NATURAL,-	3	PC	SA
2-7	DC61-00133A	CLAMPER HOSE-FIX	P1291,PP,-,HOSE+PLUG,BJ	1	PC	SA
2-8	DC97-00920H	ASSY LEG	-,ALL EXCEPT AUSTRALI MODEL,L33	4	PC	SA
3	DC97-19244A	ASSY COVER TOP	SLIM VOLGA,WW80J6210DW/SC	1	PC	SA
3-1	DC63-01937A	COVER TOP	SLIM VOLGA,ABS,T3.5,HB,DA WHIT	1	PC	SNA
4	DC61-03021A	SPRING ETC-HANGER	VOLGA,HSWR-SWRH,CD4.2,	2	PC	SA
5	DC96-01703G	SENSOR PRESSURE	Air,5,-,400mmH20,-	1	PC	SA
6	DC29-00015G	FILTER EMI	LFT-215G,300Khz,VDE, KS,6.5mH	1	PC	SA
7	DC61-03022A	GUIDE SPRING	WF1802XEU,POM,T3.5,-,F20-03	2	PC	SA
8	DC97-14653C	ASSY FIXER TUB	SCOUT,WF0804Y8E/XEF	4	PC	SA
8-1	DC60-40142B	BOLT HEX	SEW-3HR105,SM10C,HEX,M7,L114.5,	4	PC	SNA
8-2	DC60-60044B	WASHER PLAIN	SBC,ID8.4/OD30,T2.0	4	PC	SA
8-3	DC61-01937C	FIXER TUB	WF8804,FRPP,NTR,HEBA	4	PC	SNA
8-4	DC73-00035A	FIXER RUBBER	WF0804Y8E/XEF,EPDM,BLACK,-,	4	PC	SNA
9	DC61-04147A	FRAME PLATE-UP	WW80K5210VW/SH,GI-SGCC,T1	1	PC	SNA
10	DC92-01899C	ASSY KIT	FWM_DIM,WW5500K VOLGA,BUBBLE GL	1	PC	SNA

MODEL CODE: WW80K5210VW/SHService Bom (**SA**: SERVICE AVAILABLE, **SNA**: SERVICE NOT AVAILABLE)

SVC Code	Code No.	Description	Specification	QTY	Un	SA/SNA
10-1	DC93-00637B	ASSY WIRE HARNESS-MAIN	DRUM-M,WW80K5210X	1	PC	SA
10-2	DC92-01898C	ASSY PCB MAIN	FWM_DIM,WW5500K VOLGA,292*	1	PC	SA
10-3	DC27-00012A	COIL HARMONIC	4.5mH,40*69*39,3A	1	PC	SNA
10-4	DC63-01927A	COVER PCB-MAIN	WW6000J(VOLGA),ABS,T2.5,V	1	PC	SA
11	DC96-00146H	CBF-POWER CORD	AT,EUROPE,EU3F,Gray,1500,	1	PC	SA
12	DC97-16673A	ASSY COVER BACK	VOLGA-PJT,WF1802XEC	1	PC	SA
13	DC97-14291D	ASSY HOSE DRAIN(O)	Aegis-PJT,SSEC,LIGHT	1	PC	SA
14	DC64-01667A	SHUTTER	AEGIS-PJT,PP,FC2305,WHITE	1	PC	SA
15	DC61-03001A	GUIDE HOSE	WF1802XEU,PP,W84,NTR,VOLGA-PJ	1	PC	SA
16	DC61-10673C	CAP DRAIN	WF1802XEY/XSC,FRPP,BLACK	1	PC	SA
17	DC61-02879A	HOLDER WIRE	WF8804CPA,PA,-,NATURAL,-,211	1	PC	SNA
18	DC61-40081A	HOLDER WIRE	DAWH-2NC,PA66,-,NATURAL,-	3	PC	SA
19	DC61-00133A	CLAMPER HOSE-FIX	P1291,PP,-,HOSE+PLUG,BJ	1	PC	SA
20	DC61-00118A	CLAMP-CABLE	P1291,PA66,NATURAL,NC0001	1	PC	SA
21	DC93-00278C	ASSY SENSOR	VOLGA	1	PC	SA

This technical drawing is an exploded view of a mechanical assembly, likely a pump or engine component. The main assembly is composed of several sub-units, each enclosed in a rectangular box and labeled with a number: 0 (top left), 1 (bottom left), 2 (middle left), 3 (middle), and 4 (bottom right). Individual parts are labeled with numbers 0 through 18. The diagram shows the spatial relationship and assembly sequence of these components. Key parts include a large circular housing (0), a central cylindrical component (3-4), a fan-like impeller (3-1), and various mounting brackets and fasteners. The exploded view allows for a clear understanding of the assembly's structure and the location of each part.

MODEL CODE: WW80K5210VW/SH

Service Bom (SA: SERVICE AVAILABLE, SNA: SERVICE NOT AVAILABLE)


SVC Code	Code No.	Description	Specification	QTY	Un	SA/SNA
0	-	ASSY TUB & DRUM	-	1	-	-
1	DC97-16584C	ASSY SEMI TUB FRONT	volga 6000,WW80J6210	1	PC	SNA
1-1	DC97-16587C	ASSY TUB FRONT	volga 6000,WW80J6210DX/SC	1	PC	SNA
1-1-1	DC67-00354A	HOSE AIR	HEBA PJT,EPDM,BLACK,18.3g	1	PC	SA
1-1-2	DC65-60125B	CLIP RING	HSWR-SWRH,PI2.4,ID25,-	1	PC	SNA
1-1-3	DC72-00001G	CLIP RING	HEBA-PJT,HSWR-SWRH,T3.0,ID49.5	1	PC	SNA
1-1-4	DC67-00552A	HOSE DRAWER TUB	VOLGA,EPDM,ID34.5,OD40,T	1	PC	SA
1-1-5	DC65-60118R	CLIP RING	AEGIS-PJT,HSWR-SWRH,T3.0,ID37	1	PC	SA
1-1-6	DC97-16575A	ASSY CLAMP DIAPHRAGM	VOLGA,72A/ZPC2-YEL	1	PC	SA
1-1-7	DC64-03365A	DOOR DIAPHRAGM	WW6000(NEW),EPDM,T1.5	1	PC	SA
1-1-8	DC61-01679B	CLAMPER HOSE	SEW-HFR167AR,SK5,-,-	2	PC	SNA
1-1-9	DC67-00557A	HOSE AIR TUB	VOLGA,EPDM,BLK	1	PC	SA
1-1-10	DC67-00554A	HOSE AIR	VOLGA,EPDM,ID9,OD16,T2.5,BLK	1	PC	SA
1-2	DC61-03009A	TUB FRONT	VOLGA,FRPP,NTR,GENERAL	1	PC	SA
2	DC97-16581A	ASSY HOSE PRESSURE	VOLGA,WF1802XEC	1	PC	SA
2-1	DC65-00021A	CLAMPER HOSE-JOINT	HEBA PJT,HSWR-SWRH,ID	1	PC	SNA
2-2	DC67-00551A	HOSE FILTER TUB	VOLGA,EPDM,ID64.5,OD70,T	1	PC	SA
2-3	DC72-00001H	CLIP RING	HEBA-PJT,HSWR-SWRH,WHITE	1	PC	SNA
2-4	DC67-00553A	HOSE JOINT AIR	VOLGA,PP,ID18.1,NATURAL	1	PC	SNA
2-5	DC61-70029C	CLIP RING	SEW-HW125,HSWR,WHITE	2	PC	SNA
2-6	DC67-00550A	HOSE WATER	WF1802XEQ/YLP,EPDM,ID4.5,OD8.	1	PC	SNA
3	DC97-16583A	ASSY DRUM	WF1802XEC_YLP	1	PC	SA
3-1	DC97-16580A	ASSY FLANGE SHAFT	WF1802XEC_YLP	1	PC	SA
3-2	6031-001632	WASHER-WAVE	SK5,ID30,OD33.8,T0.6,ZPC	1	PC	SNA
3-3	DC66-00652A	DRUM BACK	VOLGA-PJT,STS430,OD523.8,T0.4	1	PC	SNA
3-4	DC66-00654A	DRUM WRAPPER	VOLGA,STAINLESS-STS430,H307	1	PC	SNA
3-5	DC66-00653C	DRUM FRONT	volga,STAINLESS-STS304,OD525,	1	PC	SNA
3-6	DC66-00657A	DRUM LIFTER	VOLGA-PJT,PP,T3.0,HB,NATURAL	3	PC	SA
3-7	DC60-40137A	BOLT HEX	MARS-PJT,STS430,M8,P1.25,L30,HE	3	PC	SA
4	DC97-16578A	ASSY SEMI TUB BACK	VOLGA,WF1802NFWU,FRPP	1	PC	SA
4-1	DC61-03007A	TUB BACK	VOLGA,FRPP,OD537.4,NTR,GENERAL	1	PC	SNA
4-2	DC62-00008A	SEAL OIL	NBR,BLACK,-,NBU	1	PC	SA
4-3	DC61-02874A	BRACKET HEATER	WD0704CQR,STAINLESS-STS43	1	PC	SNA
4-4	DC47-00033B	HEATER WASH	AC230V,2000W,SUS316L,728mm,N	1	PC	SA
4-5	DC69-00824A	PACKING-THERMISTOR	GW-PJT,EPDM,-,-,W17,H	1	PC	SNA
4-6	DC32-00010C	THERMISTOR	WASHER,-10~100,5,5,3.243k ± 2	1	PC	SA
4-7	DC69-01741A	PACKING-TUB	VOLGA,EPDM,EPDM,T5.5,L1601,H	1	PC	SA
4-8	DC93-00015B	ASSY WIRE EARTH	VOLGA,BEST,220V,EARTH WI	1	PC	SA

MODEL CODE: WW80K5210VW/SH

Service Bom (SA: SERVICE AVAILABLE, SNA: SERVICE NOT AVAILABLE)

SVC Code	Code No.	Description	Specification	QTY	Un	SA/SNA
4-9	DC97-16586A	ASSY HOUSING BEARING	VOLGA-PJT,WF1802XEC	1	PC	SNA
5	6602-001497	BELT-TIMING GEAR	RUBBER(GATES),T3.2,1270	1	PC	SA
6	6011-003934	BOLT-HEX	M7.6,L48,ZPC(WHT),SCM 435,WASHE	3	PC	SA
7	6011-004024	BOLT-HEX	M12,L30,NTR,SWRCH10A	1	PC	SA
8	DC67-00836A	WEIGHT BALANCER-UP	CONCRETE,GREEN	1	PC	SA
9	DC66-00655A	PULLEY MOTOR	VOLGA-PJT,ALDC,OD296.8,W21,	1	PC	SA
10	DC61-03012A	GUIDE PIN	VOLGA,POM,T2.5,W20.3,L71,NTR	2	PC	SA
11	DC60-40144A	BOLT HEX	SM10C,L35,ZPC2(YEL),M10,ZPC2(YE	3	PC	SA
12	DC66-00660A	DAMPER SHOCK	VOLGA-PJT,PP,60N,W24,L215,B	1	PC	SA
13	DC66-00661A	DAMPER SHOCK	VOLGA-PJT,PP,120N,W24,L215,	1	PC	SA
14	DC61-01097A	BUSH MOTOR	PA,-,-,PA66(2110R)	2	PC	SNA
15	6011-003934	BOLT-HEX	M7.6,L48,ZPC(WHT),SCM 435,WASHE	3	PC	SA
16	DC67-00556B	WEIGHT BALANCER	WW6000(VOLGA),CONCRETE,1	1	PC	SA
17	DC93-00586A	ASSY MOTOR BLDC	F3 35mm Press Housng Ty	1	PC	SA
18	DC97-14263A	ASSY BOLT	MOTOR/BOLT(M8)+WASHER(OD27.5),	2	PC	SA

4. ASS'Y FRAME FRONT

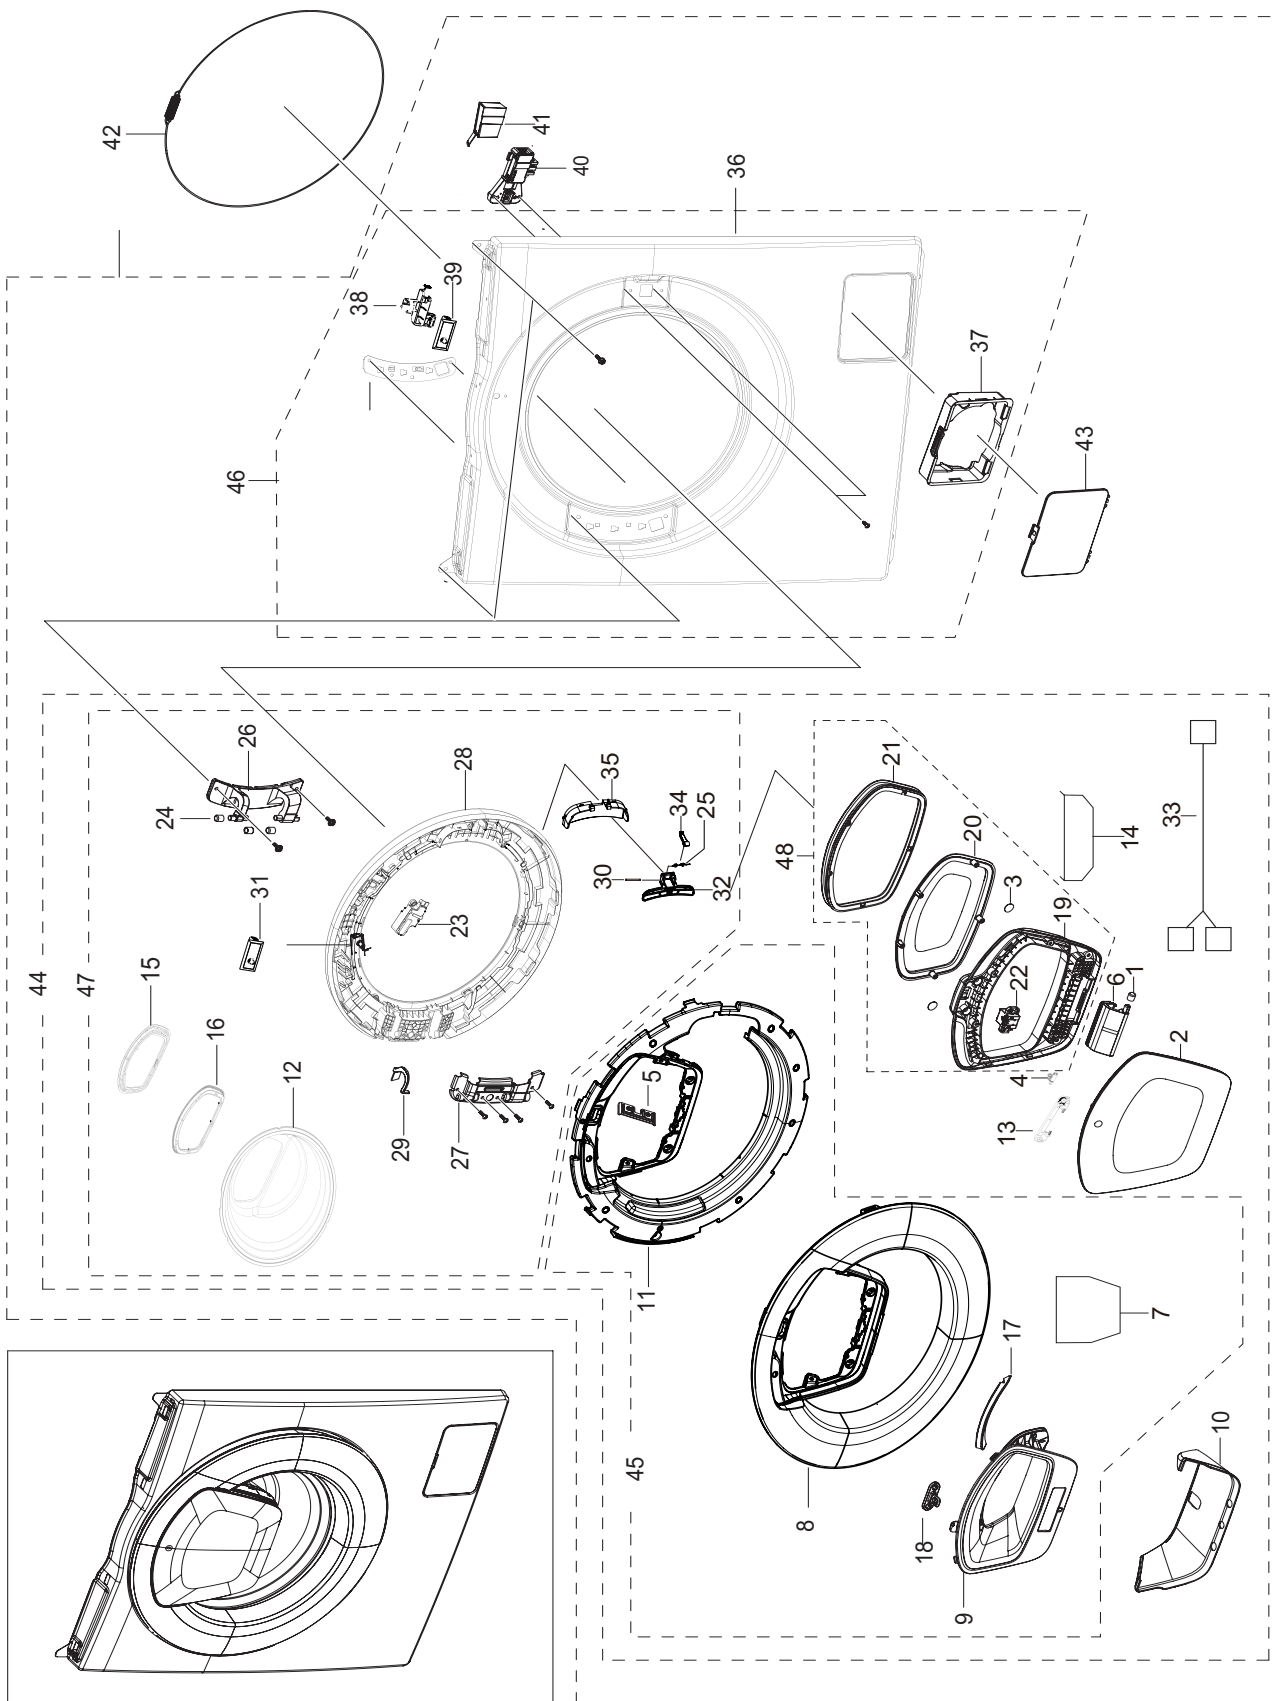

MODEL CODE: WW80K5210VW/SHService Bom (**SA**: SERVICE AVAILABLE, **SNA**: SERVICE NOT AVAILABLE)


Drawing No	Code No.	Description	Specification	QTY	Un	SA/ SNA
1	DC61-00891A	GUIDE HINGE	HAUZEN(DOM),POM,NTR(WHT),HIN	1	PC	SA
2	DC63-01942B	COVER DOOR	WW8/7/6/5500K,ABS+PMMA,WT0035	1	PC	SNA
3	DC64-03400A	INLAY-DOOR	WW5500K,PET,T0.3,DA WHITE,10.	2	PC	SNA
4	DC66-00878A	DAMPER SHOCK-AXIS	WD9500JK,POM,NATURAL	1	PC	SA
5	DC61-04078A	SUPPORT HINGE	WD9500J,GI-SGCC,T1.4	1	PC	SNA
6	DC61-04133B	HINGE DOOR	ALDC,T5.0,INOX GRAY Spray	1	PC	SA
8	DC63-01940A	COVER DOOR	WW5500K,ABS+PMMA,DA WHITE,HG-	1	PC	SNA
9	DC63-01945A	COVER-ADD IN	WW8/7/6/5500K,PETG,VERSAILL	1	PC	SNA
10	DC63-01973A	COVER HOLDER	SLIM VOLGA ADD IN,ABS,HB,VE	1	PC	SA
11	DC63-01944D	COVER-GLASS	WW5500K,ABS,HB,DA WHITE,HG-0	1	PC	SNA
12	DC64-03453A	DOOR GLASS	GLASS,T5.0,CLEAR TP	1	PC	SA
13	DC61-04044A	SUPPORT HINGE	WD9500JK,ALDC,T2.5	1	PC	SA
14	DC62-00466A	SEAL WASHER	EPDM,BLACK,EPDM FOAM,L90*W40	1	PC	SNA
15	DC62-00473A	SEAL CAP GUIDE	WW8/7/6/5500K,PETG,VERSAI	1	PC	SNA
16	DC62-00475A	SEAL RUBBER	ADD WASH,SI,GY0039	1	PC	SNA
17	DC67-00855A	CAP	SLIM VOLGA ADD IN,PETG,VERSAILLES GR	1	PC	SA
18	DC66-00890A	LEVER-TIP	ZNDC,Cr Coating	1	PC	SA
19	DC61-04139B	HOLDER GLASS	WW8/7/6/5500K,PP,T3.0,DA WH	1	PC	SNA
20	DC61-04140A	GUIDE COVER	PETG,T2.0,HT,GENTLE BLUE(BL0	1	PC	SNA
21	DC62-00474A	SEAL DOOR	SI,GY0039	1	PC	SA
22	DC97-19401A	ASSY LATCH	WW8500K	1	PC	SA
23	DC34-00025D	SWITCH DOOR LOCK	DC12V,0.35	1	PC	SA
24	DC61-00891A	GUIDE HINGE	HAUZEN(DOM),POM,NTR(WHT),HIN	3	PC	SA
25	DC61-02027A	SPRING ETC LEVER	STS304,CD1.2,L10.6	1	PC	SA
26	DC61-04131A	HINGE DOOR	WW6/5500K,ALDC,T5.0,155X54.8X	1	PC	SA
27	DC61-04134A	BRACKET HOLDER	WW6/5500K,GI-SGCC,T1.2	1	PC	SNA
28	DC61-04136D	HOLDER GLASS	WW5500K,PP,DA WHITE,FC2305,	1	PC	SNA
29	DC63-01934A	COVER HINGE	WW6/5500K,PP,T2.0,VERSAILLES	1	PC	SNA
30	DC64-00564A	HANDLE PIN	WF602U2BKWQ/SC,STS304,NATURE	1	PC	SA
31	DC64-00828G	SWITCH DOOR	AC125/250V,1.5/0.75,1BUTTON,	1	PC	SA
32	DC64-02852A	HANDLE DOOR	WF-F500E,ABS,T2.0,HG-0760GP,	1	PC	SA
33	DC93-00638A	ASSY WIRE HARNESS-SUB	DRUM-M,SUB ADD WAS	1	PC	SA
34	DC66-00497A	LEVER DOOR	WF8804DP,ZNDC,T10,W10,L46,NI	1	PC	SC
35	DC63-01541A	COVER HANDLE	WF-F500E,ABS,-,DA WHITE,H	1	PC	SA

MODEL CODE: WW80K5210VW/SH

Service Bom (SA: SERVICE AVAILABLE, SNA: SERVICE NOT AVAILABLE)

Drawing No	Code No.	Description	Specification	QTY	Un	SA/SNA
36	DC61-04226A	FRAME FRONT	GI-SGCC,DA WHITE,T0.8,SLCDA(	1	PC	SNA
37	DC61-04227A	GUIDE FILTER	PP,T2.0,TB53,BLACK	1	PC	SA
38	DC34-00025D	SWITCH DOOR LOCK	DC12V,0.35	1	PC	SA
39	DC64-00828G	SWITCH DOOR	AC125/250V,1.5/0.75,1BUTTON,	1	PC	SA
40	DC64-01538A	SWITCH DOOR LOCK	AC250V,16,BIMETAL	1	PC	SA
41	DC63-00967A	COVER DOOR SWITCH	AEGIS-PJT/ WF8500NHW,P	1	PC	SA
42	DC91-12078E	ASSY WIRE DIAPHRAGM	AEGIS,WF8500NHW/YLP,	1	PC	SA
43	DC63-01974A	COVER FILTER	ABS,T2.5,DA WHITE,WT0035	1	PC	SA
44	DC97-19584B	ASSY DOOR	SLIM VOLGA ADD WASH,WW80K5210X	1	PC	SA
45	DC97-19587B	ASSY COVER DOOR	SLIM VOLGA ADD WASH,WW80	1	PC	SA
46	DC97-19591B	ASSY FRAME FRONT	WW5500K VOLGA,WW70K5210	1	PC	SA
47	DC97-19578B	ASSY HOLDER GLASS	SLIM VOLGA ADD IN,WW80	1	PC	SA
48	DC97-19300B	ASSY HOLDER GLASS	WW5/6/7500K	1	PC	SA


5. PANEL-CONTROL & DRAWER

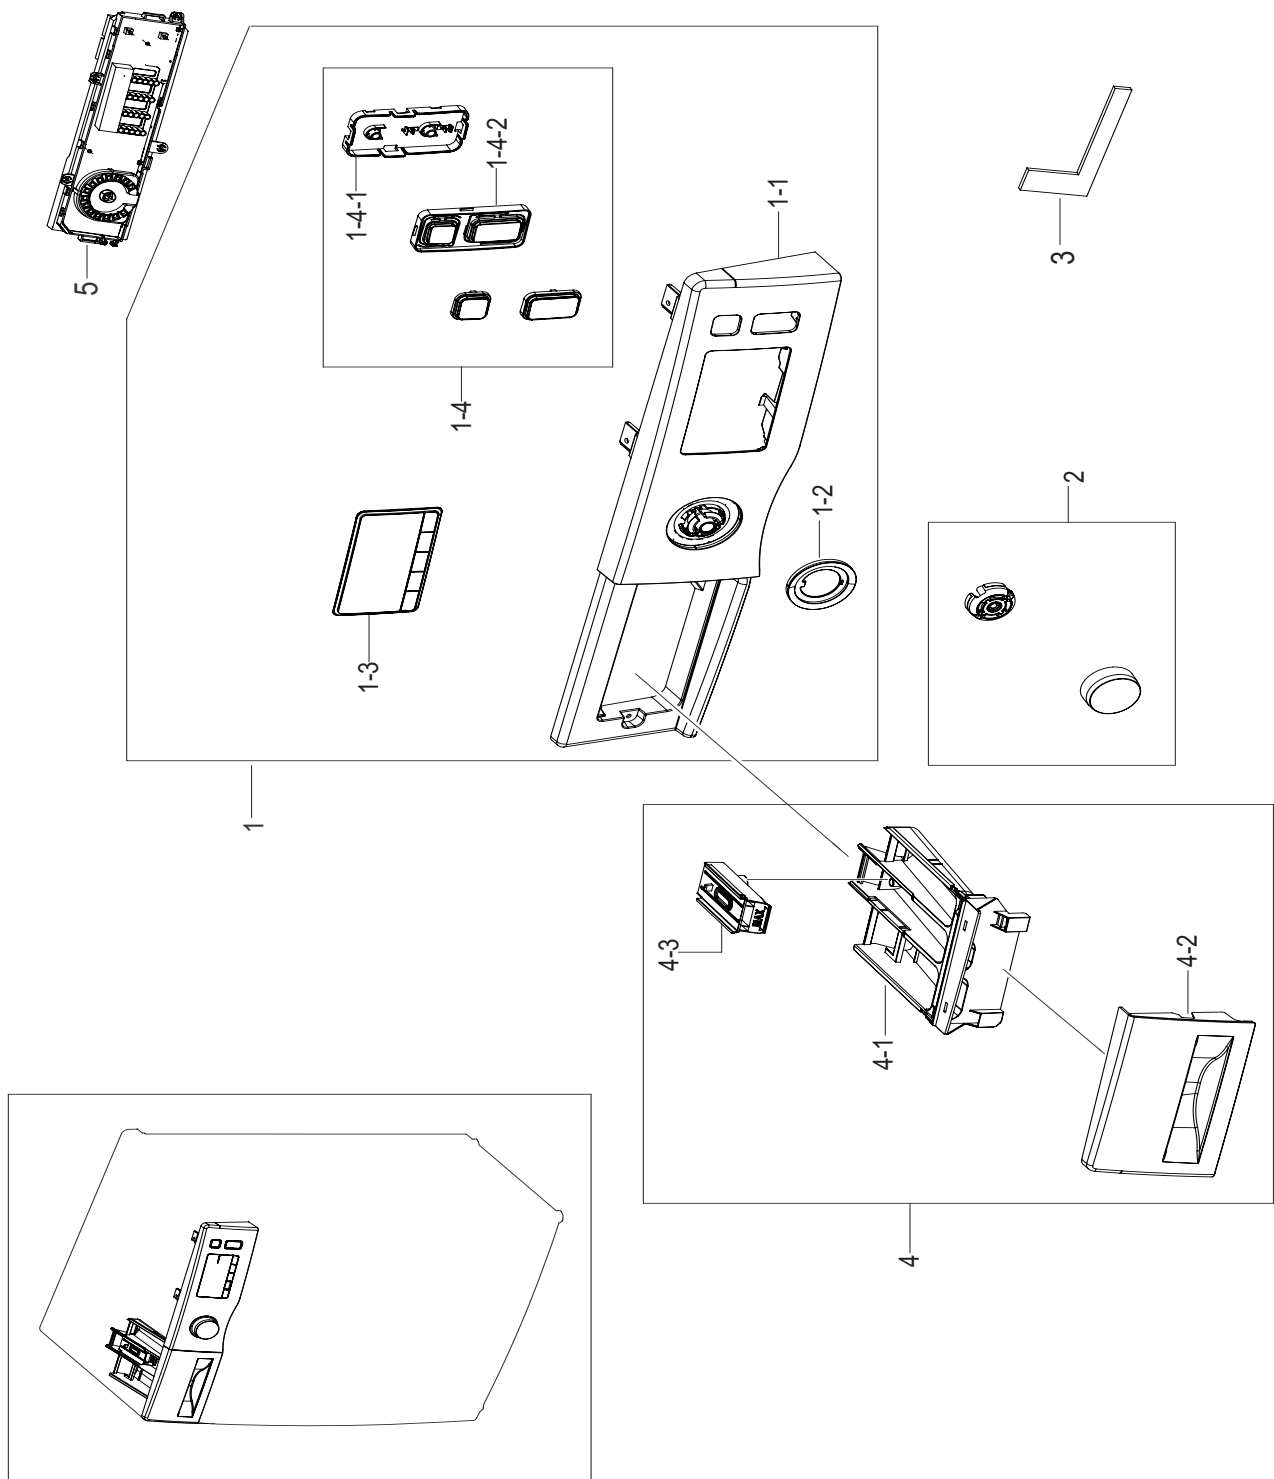

MODEL CODE: WW80K5210VW/SHService Bom (**SA**: SERVICE AVAILABLE, **SNA**: SERVICE NOT AVAILABLE)

No.	Code No.	Description	Specification	QTY	Un	SA/ SNA
1	DC97-19741E	ASSY PANEL CONTROL	WW5500K VOLGA,WW80K52	1	PC	SA
1-1	DC64-02853A	PANEL CONTROL	F500E,ABS,-,HG-0760GP,DA W	1	PC	SNA
1-2	DC64-02856B	WINDOW ENCODER	ABS+PMMA,HB,TF-0930,GRAY	1	PC	SNA
1-3	DC64-03455R	WINDOW PANEL	WW80K5210XW/EC,PMMA,FT6120,	1	PC	SNA
1-4	DC97-19103A	ASSY BUTTON	WD6000J	1	PC	SNA
1-4-1	DC63-01543A	COVER-BUTTON(L)	F500E,ABS,T2.0,-,DA WHIT	1	PC	SNA
1-4-2	DC64-03313A	BUTTON PUSH-POWER	WD6000J,ABS,DA WHITE,W	1	PC	SNA
2	DC97-17318B	ASSY KNOB ENCODER	WF80F50FU4W/EF	1	PC	SA
3	DC93-00540A	ASSY SENSOR	F500 IML BEST,5V,7-BUTTON,TO	1	PC	SA
4	DC90-22953A	ASSY DRAWER	WW5500K VOLGA,WW70K5210XW/ET	1	PC	SNA
4-1	DC61-03480A	BODY DRAWER	WF-F500E,PP,NEAT WHITE,WT004	1	PC	SA
4-2	DC64-02858M	PANEL DRAWER	ABS,HB,HG0760GP,DA WHITE,WT	1	PC	SA
4-3	DC67-00669A	CAP RINSE	WF-F500E,PP,-,-,MT43,Honesty B	1	PC	SA
5	DC92-01923B	ASSY PCB DISPLAY	FWM_DIM,WW5500K VOLGA,3	1	PC	SA

6. ASS'Y HOUSING DRAWER

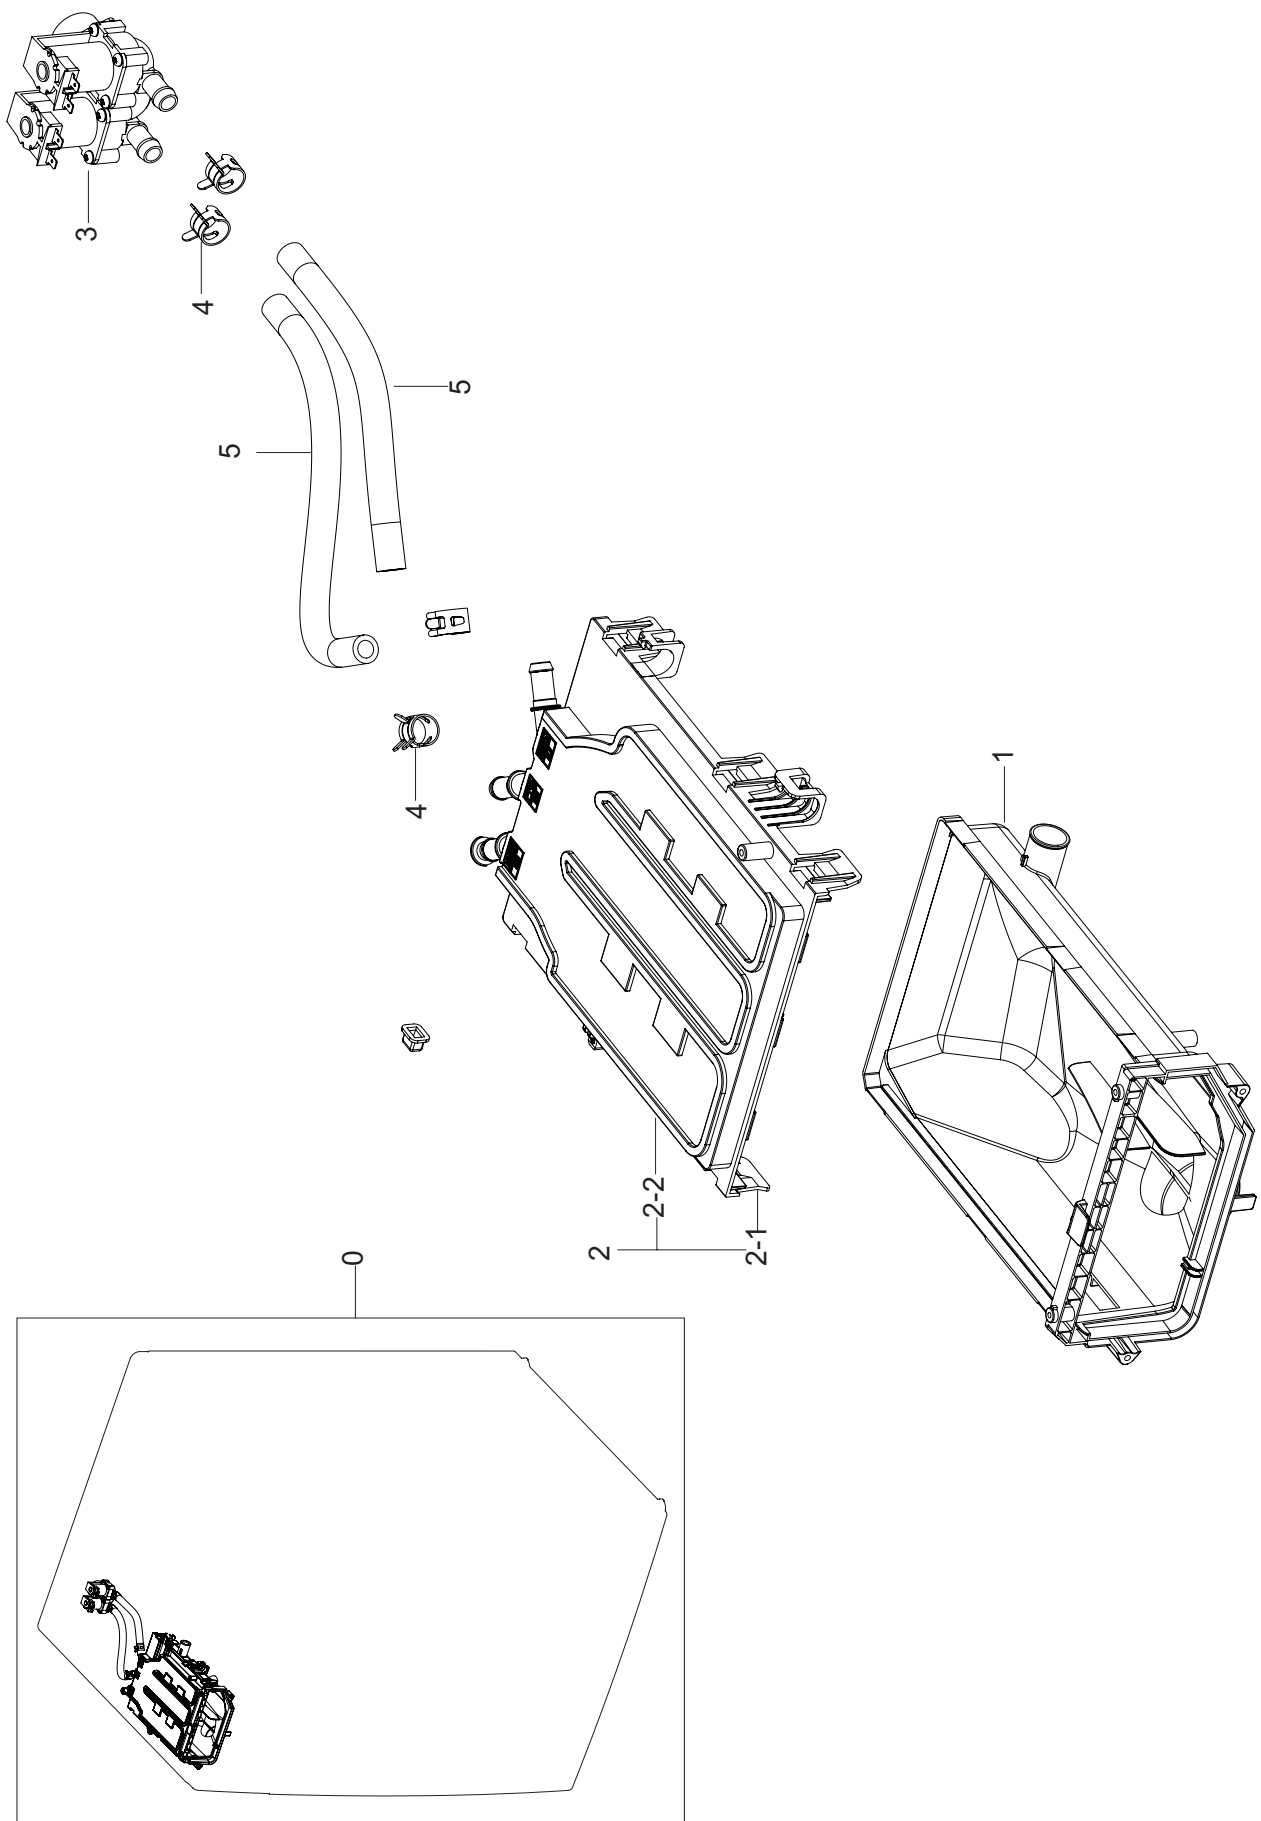

MODEL CODE: WW80K5210VW/SHService Bom (**SA**: SERVICE AVAILABLE, **SNA**: SERVICE NOT AVAILABLE)

No.	Code No.	Description	Specification	QTY	Un	SA/ SNA
0	DC97-19242A	ASSY HOUSING DRAWER	SLIM VOLGA,8kg	1	PC	SA
1	DC61-04141A	HOUSING DRAWER-LOW	WW80J6210DS/SC,PP,NAT	1	PC	SNA
2	DC97-19241A	ASSY S.HOUSING DRAWER	SLIM VOLGA,8.0KG	1	PC	SNA
2-1	DC61-03474A	HOUSING DRAWER-MIDDLE	WF-F500E,PP,-,NATU	1	PC	SNA
2-2	DC61-03475C	HOUSING DRAWER-UP	WW80J6210DS/SC,PP,NATU	1	PC	SNA
3	DC62-00024M	VALVE WATER	AC220-240V,Bracket,1in 2out,	1	PC	SC
4	DC65-00008B	CLAMPER HOSE	SSEC-GE,SK5,-,Dacromet,T1.0	4	PC	SA
5	DC67-00051F	HOSE DRAWER	WF8502NHW,EPDM,ID9.0,OD14.5,	0.56	M	SA

8. PARTS LIST (SCREW PARTS)

MODEL CODE: WW80K5210VW/SH

Service Bom (SA: SERVICE AVAILABLE, SNA: SERVICE NOT AVAILABLE)

No.	Code No.	Description	Specification	QTY	Un	SA/ SNA
1	6002-001327	SCREW-TAPPING	PWH,+,1,M4,L12,ZPC(WHT),SW	2	PC	SNA
2	6002-000213	SCREW-TAPPING	TH,+,1,M4,L12,ZPC(WHT),SWR	1	PC	SNA
3	6002-000213	SCREW-TAPPING	TH,+,1,M4,L12,ZPC(WHT),SWR	3	PC	SNA
4	6002-000445	SCREW-TAPPING	TH,+,NO,2S,M4,L18,PASS,STS	2	PC	SNA
5	6006-001174	SCREW-TAPPING	TH,+,WT,2S,M4,L12,ZPC(WHT)	2	PC	SNA
6	DC97-15633A	ASSY SCREW	TH,SWCH22A,M4	2	PC	SNA
7	6002-001436	SCREW-TAPPING	PH,+,2,M4,L18,ZPC(WHT),SWR	6	PC	SNA
8	6002-001327	SCREW-TAPPING	PWH,+,1,M4,L12,ZPC(WHT),SW	4	PC	SNA
9	6006-001174	SCREW-TAPPING	TH,+,WT,2S,M4,L12,ZPC(WHT)	2	PC	SNA
10	DC67-00437A	CAP SCREW	WCVH4800K0WW,PVC,T1.0,OD3.5,L1	1	PC	SNA
11	6002-000213	SCREW-TAPPING	TH,+,1,M4,L12,ZPC(WHT),SWR	1	PC	SNA
12	6002-000445	SCREW-TAPPING	TH,+,NO,2S,M4,L18,PASS,STS	2	PC	SNA
13	6003-001768	SCREW-TAPTYPE	TH,+,WT,S,M4,L10,ZPC(WHT),	2	PC	SNA
14	6009-001343	SCREW-SPECIAL	PH,TORX,M4,L12,ZPC(WHT),SW	1	PC	SNA
15	6002-000213	SCREW-TAPPING	TH,+,1,M4,L12,ZPC(WHT),SWR	1	PC	SNA
16	6002-000630	SCREW-TAPPING	PH,+,NO,2S,M3,L8,ZPC(WHT),	1	PC	SNA
17	6002-000630	SCREW-TAPPING	PH,+,NO,2S,M3,L8,ZPC(WHT),	1	PC	SNA
18	6001-000115	SCREW-MACHINE	BH,+, -,M3,L10,ZPC(WHT),SWR	2	PC	SNA
19	6002-000213	SCREW-TAPPING	TH,+,1,M4,L12,ZPC(WHT),SWR	1	PC	SNA
20	6003-001768	SCREW-TAPTYPE	TH,+,WT,S,M4,L10,ZPC(WHT),	1	PC	SNA
21	6002-001554	SCREW-TAPPING	BH,+,No,1,M4,L12,STS430,HE	2	PC	SNA
22	6002-001006	SCREW-TAPPING	TH,+, -,2S,M4,L12,PASS,STS4	3	PC	SNA
23	6002-000213	SCREW-TAPPING	TH,+,1,M4,L12,ZPC(WHT),SWR	1	PC	SNA
24	6003-000226	SCREW-TAPTYPE	TH,+, -,S,M4,L8,ZPC(WHT),SW	2	PC	SNA
25	6002-000445	SCREW-TAPPING	TH,+,NO,2S,M4,L18,PASS,STS	2	PC	SNA
26	6006-001174	SCREW-TAPPING	TH,+,WT,2S,M4,L12,ZPC(WHT)	3	PC	SNA
27	6002-000239	SCREW-TAPPING	TH,+,NO,2S,M4,L8,ZPC(WHT),	2	PC	SNA
28	6002-000630	SCREW-TAPPING	PH,+,NO,2S,M3,L8,ZPC(WHT),	2	PC	SNA
29	6002-001554	SCREW-TAPPING	BH,+,No,1,M4,L12,STS430,HE	2	PC	SNA
30	6006-001174	SCREW-TAPPING	TH,+,WT,2S,M4,L12,ZPC(WHT)	3	PC	SNA
31	6009-001522	SCREW-HEX	HWH,+,M5,L16,PASS,STS430,FP,SE	2	PC	SA
32	6002-000444	SCREW-TAPPING	TH,+,2,M4,L14,PASS,STS430	7	PC	SNA
33	6002-000470	SCREW-TAPPING	TH,+,NO,1,M4,L10,ZPC(WHT),	1	PC	SNA
34	6002-000471	SCREW-TAPPING	TH,+, -,1,M4,L12,PASS,STS30	5	PC	SNA
35	6002-001286	SCREW-TAPPING	FH,+, -,1,M4,L16,PASS,STS43	7	PC	SNA
36	6002-000471	SCREW-TAPPING	TH,+, -,1,M4,L12,PASS,STS30	9	PC	SNA
37	6002-000445	SCREW-TAPPING	TH,+,NO,2S,M4,L18,PASS,STS	4	PC	SNA

MODEL CODE: WW80K5210VW/SH

Service Bom (**SA**: SERVICE AVAILABLE, **SNA**: SERVICE NOT AVAILABLE)

No.	Code No.	Description	Specification	QTY	Un	SA/ SNA
38	6002-000470	SCREW-TAPPING	TH,+,NO,1,M4,L10,ZPC(WHT),	2	PC	SNA
39	6002-000470	SCREW-TAPPING	TH,+,NO,1,M4,L10,ZPC(WHT),	2	PC	SNA
40	6002-000471	SCREW-TAPPING	TH,+,-,1,M4,L12,PASS,STS30	4	PC	SNA
41	6002-001554	SCREW-TAPPING	BH,+,No,1,M4,L12,STS430,HE	1	PC	SNA
42	DE60-10080A	SCREW-TAPPING	PWH,+,-,2S,M5,L9,-,SWRCH18	2	PC	SNA