


1. MAIN

MAIN

Exploded View

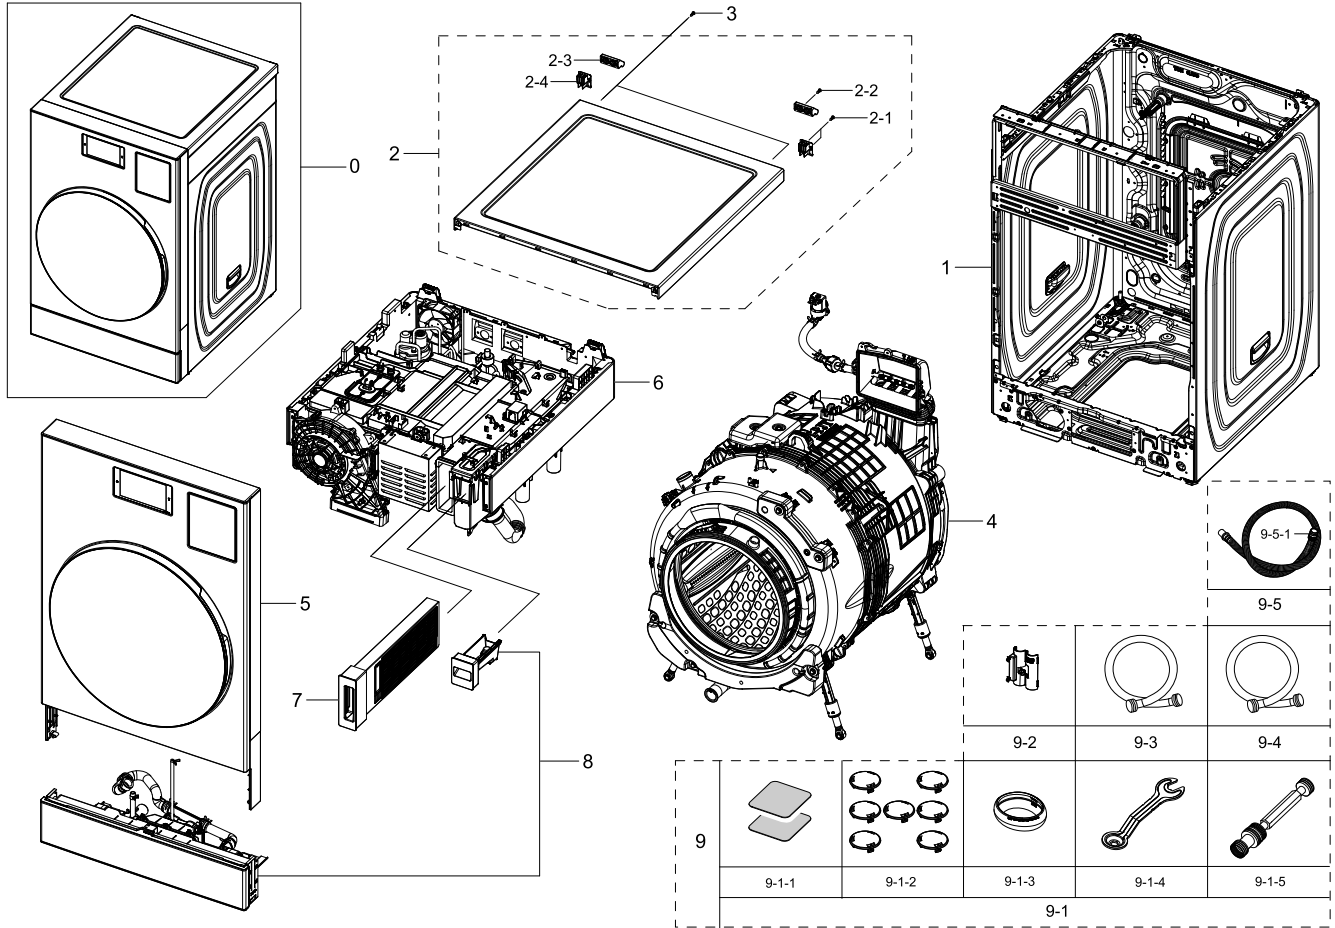

Parts List


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	1		DC90-31414D	ASSY FRAME CASE PARTS; WD8000DK,GLOBAL,DA	SNA	1
2	1	W0183	DC97-24202L	ASSY COVER TOP; WD8000DK,GLOBAL,WD26DB899	SA	1
2-1	2	WX0412	6002-000213	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T	SA	4
2-2	2	W0105	DC60-20057A	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L16,M5,T	SA	2
2-3	2		DC67-00414B	CAP COVER TOP; WD9/8/7500NK,ABS,HB,HG-076	SA	2
2-4	2		DC67-01151A	CAP COVER TOP; DV8000AK,ABS,T2.5,HG-0760G	SA	2
3	2	WX0490	6002-001431	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L16,M5,H	SA	4

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
4	1	W0502	DC90-31418F	ASSY TUB & DRUM; WD8000DK,WD18DB8995BZSC	SNA	1
5	1		DC90-31415K	ASSY FRONT PARTS; WD8000DK,GLOBAL,WD18DB8	SNA	1
6	1		DC90-31420D	ASSY BASE PARTS; WD8000DK,GLOBAL,220V MOD	SA	1
7	2	W0514	DC97-24170B	ASSY CASE FILTER; T-PJT,WD8000DK	SNA	1
8	1		DC90-31416F	ASSY DRAWER PARTS; WD8000DK,GLOBAL,ICON+E	SNA	1
9	1	W0718	DC98-05199F	ASSY ACCESSORY; WD8000DK,GLOBAL,AQUA HOSE	SNA	1
9-1	2	W0718	DC98-05248D	ASSY ACCESSORY; WD8000DK,WD18DB8995BZT1,T	SNA	1
9-1-1	3		DC63-01891A	SHEET PAPER; WD16J7800KS,PAPER,T1,-,BLACK	SA	2
9-1-2	3	W0614	DC67-00307A	CAP-FIXER; WF438AAC/XAA,PP,T1.5,-,P-002HB	SC	7
9-1-3	3		DC75-00029B	BOWL DETERGENT; WD8000D,SI,T-PJT, Low tra	SA	1
9-1-4	3	WJ5077	DC60-40146A	BOLT SPANER; -,CR-SPCC,T2.5,L166,-,-,-,-	SA	1
9-1-5	3		DC62-00868A	VALVE CHECK; WW9000B,POM,-,-,-,UBA standa	SA	1
9-2	2		DC61-06010A	GUIDE HOSE; WD8000DK,PP,T2,-,BJ750,NATURA	SA	1
9-3	2	W0757	DC62-00079A	ASSY HOSE WATER; P1405J,AQUA-STOP,L1500,G	SC	1
9-4	2	W0757	DC97-17845B	ASSY HOSE WATER; HOT,ALL MODEL	SA	1
9-5	2	W0604	DC97-24329A	ASSY HOSE DRAIN(O); WD8000DK,WD8000DK	SA	1
9-5-1	3		DC61-06009A	BUSH HOSE; WD8000DK,TPE,BLACK,-,ER7000,-	SA	1

1.1. ASSY CASE FILTER

ASSY CASE FILTER

Exploded View

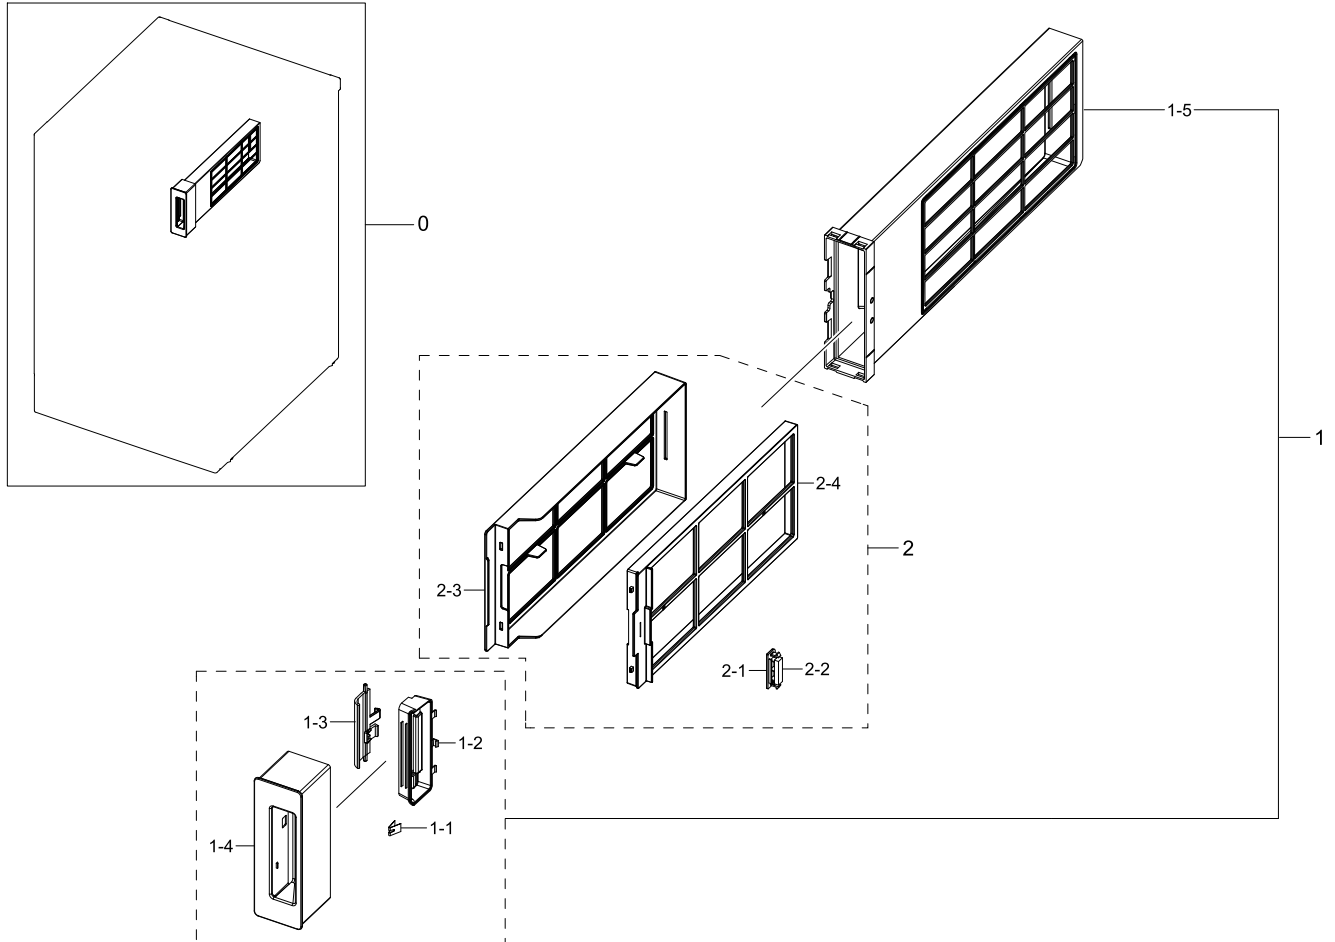

Parts List


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	2	W0514	DC97-24170B	ASSY CASE FILTER; T-PJT,WD8000DK	SNA	1
1	3		DC97-24323B	ASSY FILTER NET; T-PJT,ASSY CASE FILTER-S	SA	1
1-1	4		DC61-00498B	SPRING PLATE; WD8000DK,STS304,OD13.8,L13.	SNA	1
1-2	4		DC61-05926A	HOLDER LEVER; WD8000K,ABS,T3,DARK GRAY,-,	SNA	1
1-3	4		DC66-01135A	LEVER; WD8000K,POM,T3,K300,DARK GRAY,-	SNA	1
1-4	4		DC64-04322B	HANDLE FILTER; WD8000DK,ABS,T3,HG-0760GP,	SNA	1
1-5	4		DC61-05927A	CASE FILTER; WD8000K,PP+TD30%,T3,DARK HOL	SNA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
2	3		DC97-24322A	ASSY FILTER GUIDE; T-PJT,ASSY S.CASE FILT	SA	1
2-1	4		DC61-05932A	CASE MAGNET; WD8000K,PP+TD30%,T2.5,DARK H	SNA	1
2-2	4	M0009	DC66-90008E	MAGNET-R.S; FA,Nd,T5,-,-,5000 Gauss	SNA	1
2-3	4		DC63-03135A	FILTER-REAR; WD8000K,PP+TD30%,T3,DARK HOL	SNA	1
2-4	4		DC63-03136A	FILTER-FRONT; WD8000K,PP+TD30%,T3,DARK HO	SNA	1

2. ASSY FRAME & ELECTRICAL PARTS

ASSY FRAME & ELECTRICAL PARTS

Exploded View

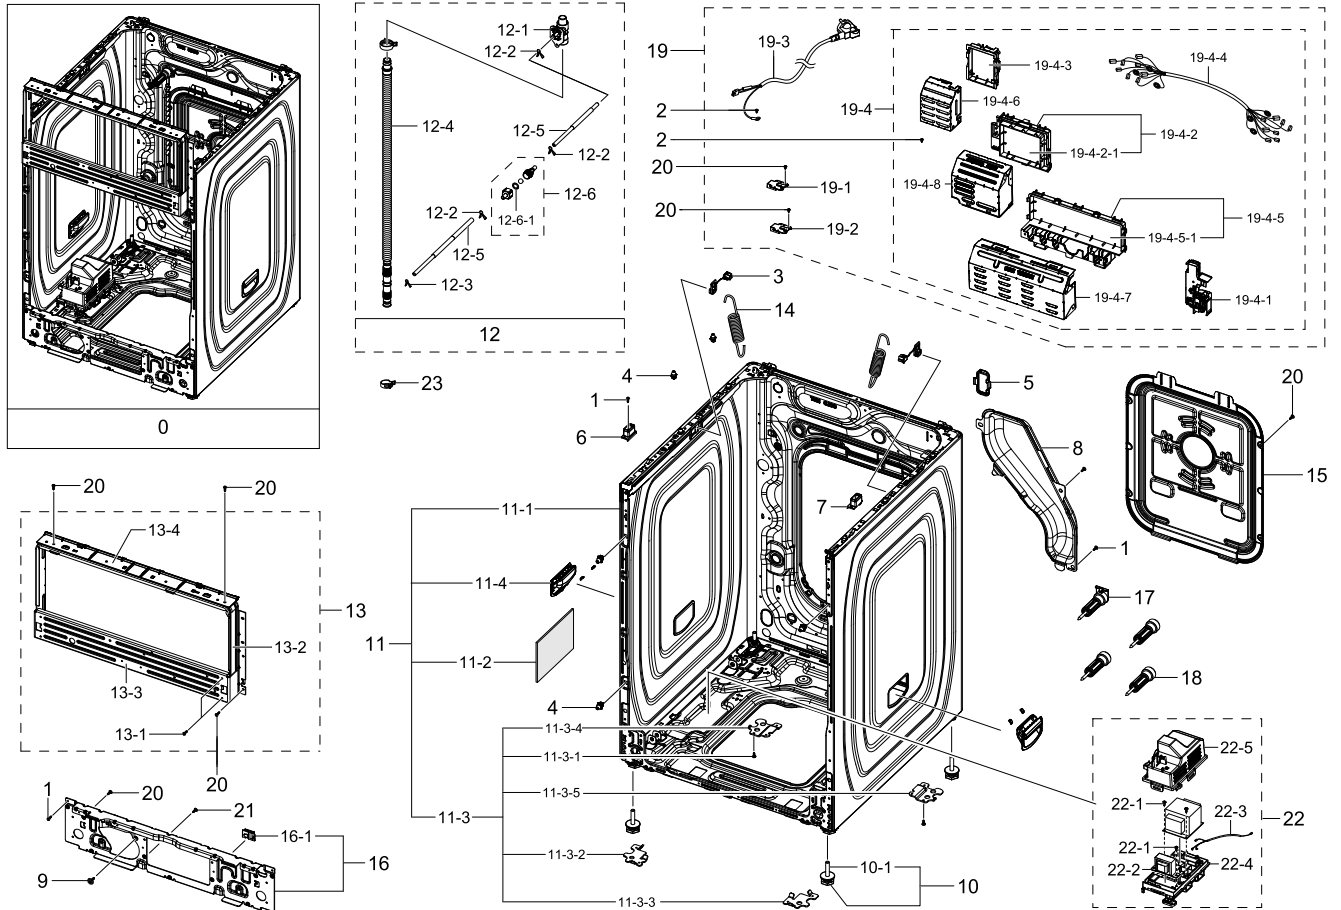

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	WX0441	6002-000520	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T	SA	7
2	2	W0105	6006-001170	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L10,M4,T	SA	6
3	2	W0140	DC61-02432A	GUIDE SPRING; WF419AAW,POM,T2,-,F20-03,NA	SA	2
4	2		DC61-03400A	GUIDE COVER TOP; HUDSON,POM,-,-,500P,BLAC	SA	7
5	2		DC61-04463A	GUIDE WIRE; WD8000D,PP,T2.5,-,BJ750,NATUR	SA	1
6	2		DC61-05894A	BRACKET COND-LEFT; WD8000D,POM,T2,BLACK,-	SNA	1
7	2		DC61-05923A	BRACKET COND-RIGHT; WD8000D,POM,T2,BLACK,	SNA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
8	2		DC63-03123A	COVER WIRE; WD8000D,GI-SGCC,T0.35,-,-,-,-	SA	1
9	2	M0030	DC97-14006A	ASSY SCREW; WF203,M4/L16	SA	1
10	2	W0606	DC97-23484A	ASSY LEG; 25kg FLAT,WF8900BK,H65.0,P1.5	SA	4
10-1	3		DC97-17071A	ASSY LEG BOLT; K4-BONANZA,OD33.2	SA	4
11	2	W0506	DC97-24218D	ASSY FRAME; WD8000DK,APPLIED HANDLE,REACT	SNA	1
11-1	3	W0244	DC61-05897B	FRAME; WD8000DK,GI-SGCC,DARK GRAY,-,T1,-,	SNA	1
11-2	3	G0054	DC63-00004C	ABSORBER SPONGE; WA-MA149AW,PU FOAM,T15,-	SA	1
11-3	3	G0417	DC97-24219C	ASSY PLATE BOTTOM; WD8000DK,WD26DB8995BZP	SNA	1
11-3-1	4	WX0441	6002-000520	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T	SA	2
11-3-2	4		DC61-05729A	FRAME CORNER-FRONT LEFT; WF8000CK,GI-SGCC	SNA	1
11-3-3	4		DC61-05730A	FRAME CORNER-FRONT RIGHT; WF8000CK,GI-SGC	SNA	1
11-3-4	4		DC61-05731C	FRAME CORNER-REAR LEFT; WD8000DK,GI-SGCC,	SNA	1
11-3-5	4		DC61-05732C	FRAME CORNER-REAR RIGHT; WD8000DK,GI-SGCC	SNA	1
11-4	3	M0036	DC97-15854J	ASSY HANDLE; WD8000DK,DARK GRAY	SA	2
12	2	M0041	DC97-24292A	ASSY HOSE DRAIN; WD8000DK,WD25DB8995BZ,AP	SA	1
12-1	3		DC61-03918A	GUIDE HOSE DRAIN; WD22H9600KG/AX,PP+TD30%	SA	1
12-2	3	WP0165	DC61-70029C	CLIP RING; SEW-HW125,HSWR,-,WHITE,-,-,ID8	SA	3
12-3	3		DC61-70029D	CLIP RING; WF337,HSWR,-,WHITE,-,-,-	SA	1
12-4	3		DC67-00330V	HOSE PUMP; WF9600BK,PP+TD30%,-,-,-,DARK H	SA	1
12-5	3		DC67-00796A	HOSE WATER; ALL MODEL,EPDM,ID5,T2,HS65,BL	SA	0.490
12-6	3		DC97-18470D	ASSY NOZZLE CONNECTOR; WF8000R,WD21B6400K	SA	1
12-6-1	4	M0029	DC69-00970A	SEAL-NOZZLE CONNECTOR; WM1255A,Si,T3,-,-,	SA	1
13	2		DC97-24201A	ASSY FRAME PLATE-UP; WD8000DK,T2	SA	1
13-1	3	WX0412	6002-000213	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T	SA	6
13-2	3		DC61-05933A	FRAME PLATE-UP; WD8000DK,GI-SGCC,-,-,T2,-	SA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
13-3	3		DC61-05934A	FRAME PLATE-LOW; WD8000DK,GI-SGCC,-,-,T2,	SA	1
13-4	3		DC61-05935A	GUIDE FRAME FRONT; WD8000DK,PP+TD30%,T2,H	SA	1
14	2	W0630	DC61-01257N	SPRING ETC-HANGER MODULE; GRACE-S PJT,SWP	SA	2
15	2		DC63-02336A	COVER BACK; WF6000P,GI-SGCC,T0.35,-,-,-,-	SNA	1
16	2		DC97-24209A	ASSY BRACKET LOWER; WD8000DK,T-PJT	SA	1
16-1	3		DC63-03151A	COVER CONNECTOR; WD8000D,PP+TD30%,T2.5,-,	SA	1
17	2	W0603	DC98-04012F	ASSY FIXER TUB; WF9600BK	SA	1
18	2	W0603	DC98-04012G	ASSY FIXER TUB; WF9600BK,No Fixer Rubber	SA	4
19	1		DC90-31413U	ASSY ELECTRICAL PARTS; WD8000DK,GLOBAL,WD	SNA	1
19-1	2		DC32-00029A	SENSOR-ACCELERATION; 3.3V,UL1569,370mm,SM	SA	1
19-2	2		DC32-00032A	SENSOR-ACCELERATION; 3.3V,UL1569,370mm,SM	SA	1
19-3	2		DC39-00067A	POWER CORD-AT; H05VV-F 3x1.5mm2,GRY,EU3F,	SA	1
19-4	2		DC92-03707Q	ASSY COVER PCB W/HARNESS; WD8000DK,GLOBAL	SNA	1
19-4-1	3		DC34-00029C	SWITCH DOOR LOCK; AC250V,16A,AUTO DOOR,SO	SA	1
19-4-2	3		DC92-02515P	ASSY PCB KIT; HW,INVERTER,T,121x95mm,220V	SA	1
19-4-2-1	4		DC92-01378U	ASSY PCB INVERTER; INVERTER,PF19_23 (1-In	SNA	1
19-4-3	3		DC92-03703A	ASSY PBA MODULE-EMI FILTER; HW,EMI FILTER	SA	1
19-4-4	3		DC93-01076D	ASSY WIRE HARNESS-MAIN; DRUM-L,DRUM MAIN,	SA	1
19-4-5	3		DC94-15217U	ASSY PCB EEPROM; EDA7,T-GLOBAL,EU	SA	1
19-4-5-1	4		DC92-03694F	ASSY PCB KIT; FWM_KIT,WD8000DK,284x80mm,1	SNA	1
19-4-6	3		DC63-03134A	COVER PBA-SUB; WD8000DK,GI-SGCC,T0.4,-,-,	SA	1
19-4-7	3		DC63-03188A	COVER PBA-MAIN; WD8000DK,GI-SGCC,T0.4,-,-,	SA	1
19-4-8	3		DC63-03189A	COVER PBA-INVERTER; WD8000DK,GI-SGCC,T0.4,	SA	1
20	2	WX0441	6002-000520	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T	SA	44

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
21	2	W0105	6002-001149	SCREW-TAPPING; SWRCH18A,NI PLT,L12,M4,TH,	SA	6
22	2		DC97-24328A	ASSY TRANS REACTOR; WD8000DK,T-PJT	SA	1
22-1	3	WX0622	6002-001306	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L14,M4,T	SA	3
22-2	3		DC26-00009R	COIL HARMONIC; 2.5mH,53x80x45mm,6A,EI48*2	SA	1
22-3	3		DC93-01095A	ASSY WIRE HARNESS-SUB; DRUM-L,GLOBAL,2-RE	SA	1
22-4	3		DC61-05996A	BRACKET REACTOR; WD800DK,ABS,T2.5,NATURAL	SNA	1
22-5	3		DC63-03202A	COVER CONNECTOR; WD8000DK,ABS,T2.5,5VA,NA	SNA	1
23	2	W0615	DC61-01679A	CLAMPER HOSE; SEW-HFR177AR,SK5,NATURAL,-,	SA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
7	2	W0640	DC93-00236G	ASSY DD BLDC MOTOR; WF8000R,COM2000A,F,DC	SNA	1
7-1	3		DC97-20193B	ASSY ROTOR; COM2000A,60.1	SA	1
7-2	3		DC97-21487D	ASSY STATOR; CDD20A,S60,34,273	SA	1
8	2	G0420	DC96-01417H	ASSY HEATER; WD0150VDX/XSG,NORMAL HEATER	SNA	1
8-1	3	W0622	DC47-00006V	HEATER WASH; AC230V,2000W,SUS316L,560mm,N	SA	1
8-2	3	W0235	DC63-00820A	COVER HEATER; WF337AAW,PC+ABS,NATURAL,NH-	SA	1
9	2	H2050	DC96-01703G	SENSOR PRESSURE; Air,5V,L0,400mmH2O	SA	1
10	2	W0601	DC97-02412A	ASSY BOLT; MOTOR/ M8*L62,,,,,,	SA	5
11	2	W0601	DC97-06080F	ASSY BOLT; WD9500J,30,M12,Washer 38	SA	1
12	2	W0601	DC97-14263A	ASSY BOLT; MOTOR/BOLT(M8)+WASHER(OD27.5),	SA	2
13	2	G0048	DC97-24156B	ASSY TUB FRONT; WD8000DK	SNA	1
13-1	3	WX0412	6002-000213	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T	SA	4
13-2	3	W0105	DC60-20057A	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L16,M5,T	SA	2
13-3	3	G0415	DC61-03244A	GUIDE HOSE; WW-PC197CS,PP+TD30%,,-,MT43,	SA	1
13-4	3		DC66-00470G	DAMPER SHOCK-MODULE; 24" Drum,PP/RUBBER/S	SA	2
13-5	3	M0038	DC97-04981F	ASSY CLAMP DIAPHRAGM; PURPLE,WF448AAW,-,-	SA	1
13-6	3	W0601	DC97-14263A	ASSY BOLT; MOTOR/BOLT(M8)+WASHER(OD27.5),	SA	2
13-7	3	W0605	DC97-14545X	ASSY HOSE PRESSURE; 600mmH20,No PBA,No Ho	SA	1
13-7-1	4	W0615	DC65-00008C	CLAMPER HOSE; DRUM W/M,SK5,-,-,T0.7	SA	2
13-8	3	W0636	DC97-24157A	ASSY SEMI TUB FRONT; WD8000DK	SA	1
13-9	3		DC97-24230A	ASSY HOSE CONNECTOR; WD8000DK	SA	1
13-9-1	4		DC97-23196A	ASSY HOSE CONNECTOR; WF9600B	SA	1
13-9-1-1	5		6044-001853	RING-O; EPDM,T1.5,OD8,ID5	SNA	2
13-9-1-2	5		DC63-02914A	COVER HINGE; WF9600BK,PP,-,-,NATURAL,-,FH	SA	1
13-9-1-3	5		DC63-02915A	COVER CONNECTOR; WF9600BK,PP,-,-,NATURAL,	SA	1
13-9-1-4	5		DC66-00688A	GEAR INTERNAL; WR-HH138UW,POM,NATURAL,-,O	SA	1
13-9-1-5	5		DC66-00689A	GEAR INTERNAL; WR-HH138UW,POM,NATURAL,-,O	SA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
13-9-1-6	5		DC66-00699A	ACTUATOR THERMAL; AC120/240V,0.5/1.5A,50/	SA	1
13-9-1-7	5		DC66-01102A	LEVER HINGE; WF9600BK,POM,-,K300,NATURAL,	SA	1
13-9-1-8	5		DC67-01186A	HOSE CONNECTOR; WF9600BK,PP,-,-,NATURAL	SA	1
13-9-1-9	5	W0503	DC93-00290A	ASSY WIRE HARNESS-BUBBLE KIT; DRUM-L,YUKO	SA	1
13-9-1-10	5	M0030	DC97-14006A	ASSY SCREW; WF203,M4/L16	SA	2
13-9-2	4	G0420	DC97-24222A	ASSY HOSE; WD8000DK,HOSE WATER,ID32,BLACK	SA	1
13-9-2-1	5	G0054	DC63-10003J	ABSORBER SPONGE; WF6500K,PU FOAM,T50,D50,	SNA	1
13-9-2-2	5		DC67-00829L	HOSE WATER; WD8000DK,EPDM,ID16,T2.75,HS65	SNA	1
13-10	3	M0045	DC97-24237B	ASSY DIAPHRAGM; T-PJT,WD8000DK	SA	1
13-10-1	4		DC62-00728A	NOZZLE DIAPHRAGM; WF6000TK,PP+TD30%,-,EUR	SA	1
13-10-2	4		DC62-00781B	NOZZLE DIAPHRAGM; WF8000R,PP+TD30%,-,EURO	SNA	1
13-10-3	4		DC64-04314B	DOOR DIAPHRAGM; WD8000DK,TPE,T2,-,ER7735D	SA	1
13-10-4	4		DC96-01710A	ASSY LAMP LED; FR-4,WHITE,AMP 5-179463-1,	SA	1
14	2	W0501	DC97-24198D	ASSY TUB BACK; WD8000DK,WD**DB8995BZ** (2	SNA	1
14-1	3	W0618	DC66-00650A	DAMPER-SHOCK; BIG-BANG,PP/RUBBER/STS,-,BL	SA	2
14-2	3	W0601	DC97-14263A	ASSY BOLT; MOTOR/BOLT(M8)+WASHER(OD27.5),	SA	2
14-3	3	M0041	DC97-16105B	ASSY HOSE DRAIN; WF6200,WF6500,WF7500	SA	1
14-3-1	4	W0744	DC65-00014E	CLAMPER HOSE-JOINT; WF6000H,HSWR,-,-,-,	SA	1
14-3-2	4	U2015	DC67-00465A	HOSE FILTER TUB; WF520,EPDM,ID73,T2,HS50,	SNA	1
14-4	3	M0046	DC97-24199D	ASSY S.TUB BACK; WD8000DK,WD**DB8995BZ**	SA	1
14-4-1	4	G0029	DC97-24197D	ASSY SEMI TUB BACK; WD8000DK,global 220V	SNA	1
14-4-1-1	5	WX0616	6002-000215	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L16,M4,T	SA	2
14-4-1-2	5	W0105	6002-001006	SCREW-TAPPING; STS430,PASS,L12,M4,TH,+,2S	SNA	1
14-4-1-3	5	WX0622	6002-001306	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L14,M4,T	SA	5


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
14-4-1-4	5	M0487	DC32-00010C	SENSOR TEMP; L120,3.243kohm,2%,60C,9.8phi	SA	1
14-4-1-5	5		DC32-00018B	SENSOR PHOTO; RCM,5V	SA	1
14-4-1-6	5		DC61-05879B	TUB BACK; WD8000D,PP+GLF15%,T3.5,NATURAL,	SNA	1
14-4-1-7	5		DC67-01261A	DUCT CONNECTOR; PP+TD30%,T2.5,-,FC2305,NA	SNA	1
14-4-1-8	5		DC67-01269A	HOSE CONDENSER; WD8000DK,EPDM,-,T2,HS50,B	SNA	1
14-4-1-9	5		DC97-24231C	ASSY NOZZLE; WD8000DK,WD26DB8995BZCO	SA	1
14-4-2	4		6601-003009	BEARING BALL; 6306-2RZ,SBF4118,L19,OD72,I	SA	1
14-4-3	4		6601-003008	BEARING BALL; 6307-2RZ,SBF4118,L21,OD80,I	SA	1
15	2	W0165	DC97-24224A	ASSY DRUM; WD8000DK,-	SA	1
15-1	3	W0105	6002-001186	SCREW-TAPPING; STS430,PASS,L16,M5.5,TH,+,	SA	6
15-2	3	WJ5081	DC60-40137A	BOLT HEX; MARS-PJT,STS430,-,L30,-,-,HEX	SA	6
15-3	3	W0492	DC97-19282A	ASSY BALANCER; WF7500K,WF50K7500AV,18	SA	1
15-4	3	W0164	DC97-23217A	ASSY FLANGE SHAFT; WF8900B,-	SA	1
15-5	3	M0062	DC97-24225A	ASSY DRUM WRAPPER; WD8000DK,-	SA	1
15-5-1	4	W0105	6002-001186	SCREW-TAPPING; STS430,PASS,L16,M5.5,TH,+,	SA	3
15-6	3		6031-001662	WASHER-SPRING; SK5,NTR,T1,OD45,ID35.2,SPR	SA	1
16	2	G0049	6011-001644	BOLT-HEX; M10,L35,ZPC(WHT),HH,+,SM10C,DAM	SA	4
17	2		DC61-05888A	JOINT DIAPHRAGM; WD8000DK,EGI-SECC,T1,-,-	SNA	1
18	2	WX0441	6002-000520	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T	SA	44

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
2-2-3	7	W0151	DC67-00051F	HOSE DRAWER; WF8502NHW,EPDM,AEGIS	SA	0.180
2-2-4	7		DC93-00306A	ASSY S.NOZZLE CONNECTOR; WD0804,SCOUT COM	SA	1

4. ASSY FRONT PARTS

ASSY FRONT PARTS

Exploded View

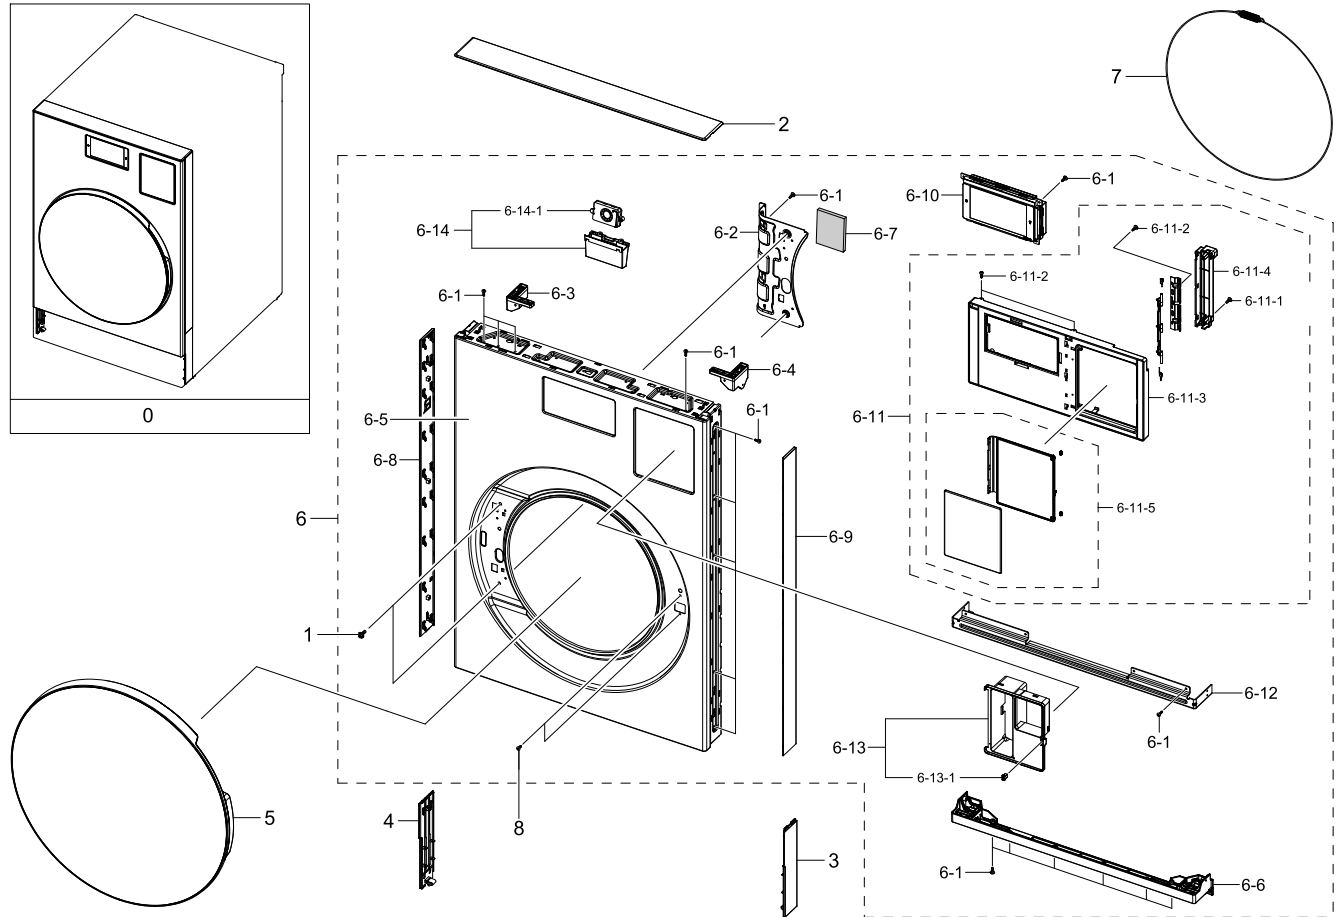

Parts List


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	1		DC90-31415K	ASSY FRONT PARTS; WD8000DK,GLOBAL,WD18DB8	SNA	1
1	2	G0425	6009-001522	SCREW-HEX; HWH,+,M5,L16,PASS,STS430,FP,SE	SA	2
2	2		DC64-04318A	DECORATION LID-UP; WD8000D,ABS,T2,DARK GR	SA	1
3	2		DC64-04319A	DECORATION LID-LOW RIGHT; WD8000D,ABS,T2,	SA	1
4	2		DC64-04320A	DECORATION LID-LOW LEFT; WD8000D,ABS,T2,D	SA	1
5	2	W0459	DC97-23029K	ASSY DOOR; WD8000DK,VOLUME INCREASE	SA	1
6	2	W0253	DC97-24134L	ASSY FRAME FRONT; WD8000DK,GLOBAL,DARK ST	SA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
6-1	3	W0105	6002-000239	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L8,M4,TH	SA	36
6-2	3		DC61-05892A	BRACKET HINGE; WD8000D,GI-SGCC,T1.4,-,-,-	SNA	1
6-3	3		DC61-05895A	FRAME FRONT-UP LEFT; WD8000D,PP+TD30%,DAR	SA	1
6-4	3		DC61-05896A	FRAME FRONT-UP RIGHT; WD8000D,PP+TD30%,DA	SA	1
6-5	3		DC61-05900A	FRAME FRONT; WD8000D,EGI-SECD,-,DARK STEE	SNA	1
6-6	3		DC61-05903A	GUIDE COVER-REAR; WD8000D,PP+TD30%,T2,HB,	SA	1
6-7	3	G0054	DC63-10002D	ABSORBER SPONGE; DV8500NK,PU FOAM,T10,BLA	SA	2
6-8	3		DC64-04316A	DECORATION LID-LEFT; WD8000D,ABS,T2,DARK	SA	1
6-9	3		DC64-04317A	DECORATION LID-RIGHT; WD8000D,ABS,T2,DARK	SA	1
6-10	3		DC92-03710D	ASSY PBA MODULE-DISPLAY; FWM_LCD PBA ASSY	SA	1
6-11	3		DC97-24133B	ASSY GUIDE PANEL; WD8000DK,WD25DB8995BZ,D	SNA	1
6-11-1	4	WX0412	6002-000213	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T	SA	2
6-11-2	4	W0105	6002-000239	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L8,M4,TH	SA	5
6-11-3	4		DC61-05875A	GUIDE PANEL; T-PJT,DISPLAY,ABS,-,-,CNTK A	SNA	1
6-11-4	4		DC61-05902A	GUIDE COVER FILTER; WD8000D,ABS,T3,-,HG-0	SA	1
6-11-5	4	M0039	DC97-24155B	ASSY COVER FILTER; T-PJT,WD8000DK	SA	1
6-12	3		DC97-24154A	ASSY BRACKET FRAME; T-PJT,WD8000DK,-	SA	1
6-13	3	W0514	DC97-24171A	ASSY CASE FILTER; T-PJT,WD8000DK	SA	1
6-13-1	4	M0374	DA66-01072A	LATCH; LATOUR,POM,NATURAL,DC LATCH	SA	1
6-14	3		DC98-05193A	ASSY HOLDER-SPEAKER; T-PJT,SPEAKER	SA	1
6-14-1	4		3001-002875	SPEAKER; 8Ohm,82dB,350Hz,60.5x40x10.5mm,2	SA	1
7	2	W0608	DC97-04973B	ASSY WIRE DIAPHRAGM; SEW-HFR167AR,-,-,-	SA	1
8	2	W0105	6002-000445	SCREW-TAPPING; STS430,PASS,L18,M4,TH,+,NO	SA	2

4.1. ASSY PBA MODULE-DISPLAY

ASSY PBA MODULE-DISPLAY

Exploded View

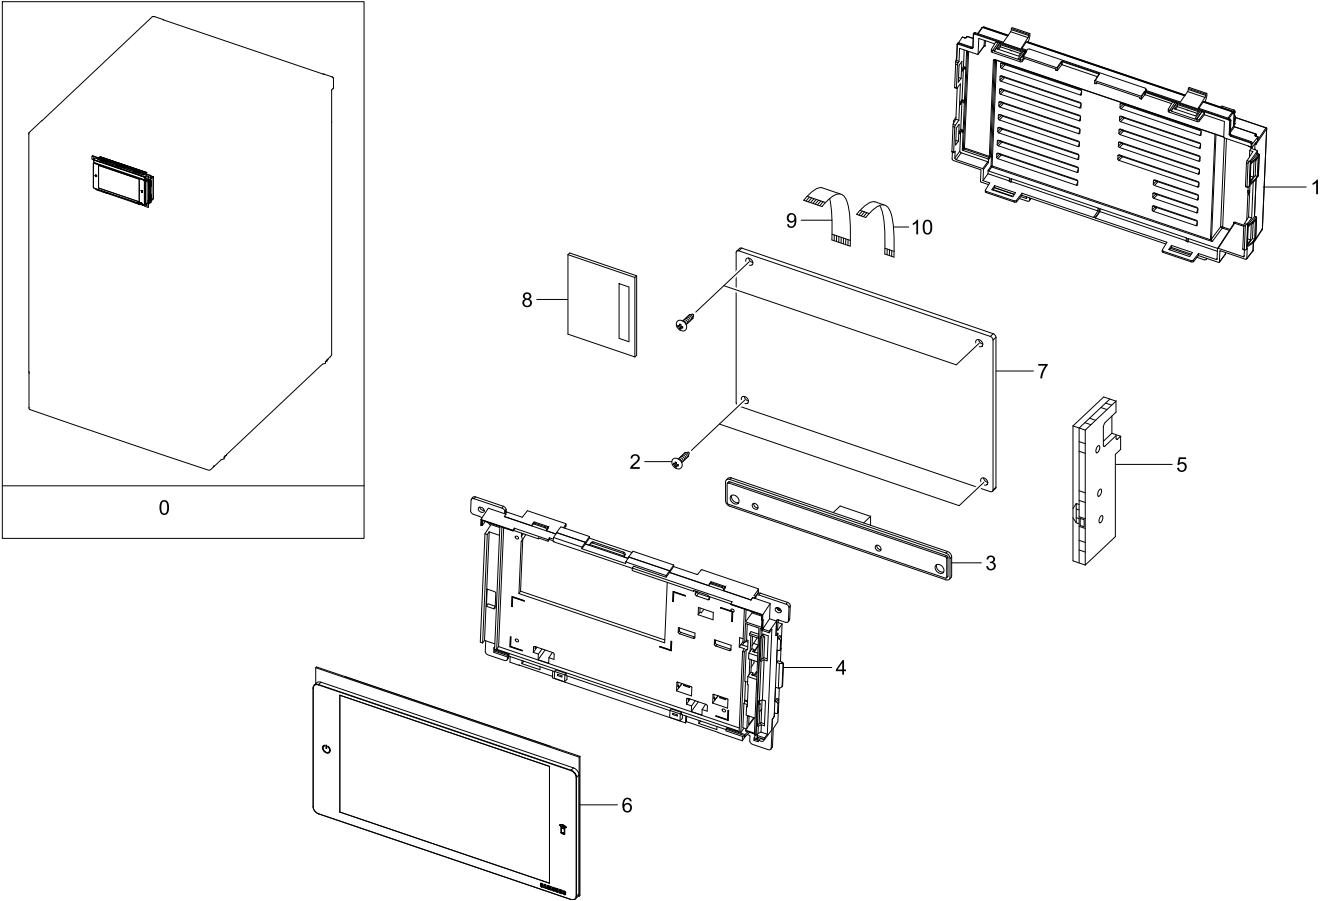

Parts List


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	3		DC92-03710D	ASSY PBA MODULE-DISPLAY; FWM_LCD PBA ASSY	SA	1
1	4		DC63-03116A	COVER PCB-SUB; T-PJT,DISPLAY,ABS,-,5VA,BL	SNA	1
2	4	W0105	6002-000239	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L8,M4,TH	SA	4
3	4		DA92-01368B	ASSY PBA MODULE-VOICE; HW,DIGITAL MIC,RF9	SA	1
4	4		DC61-05874A	GUIDE COVER PCB; T-PJT,DISPLAY,7INCH,ABS,	SNA	1
5	4		4709-003253	W-LAN MODULE; WCP730M,MT7668,IEEE802.11,2	SNA	1
6	4		DC90-31395A	ASSY DISPLAY; WD8000DK,LCD+ITO+0.7TGLASS+	SNA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
7	4		DC92-03690D	ASSY PCB DISPLAY; S905D3 7" LCD SUB, TOUC	SNA	1
8	4		DC92-03692A	ASSY PBA MODULE-DISPLAY; FWM_TOUCH,T-PJT,	SNA	1
9	4		DC93-01062A	ASSY WIRE HARNESS-TOUCH; DRUM-L,SPEAKER,M	SNA	1
10	4		DC93-01063A	ASSY WIRE HARNESS-SUB; DRUM-L,WIFI,7" LCD	SNA	1

4.2. ASSY DOOR

ASSY DOOR

Exploded View

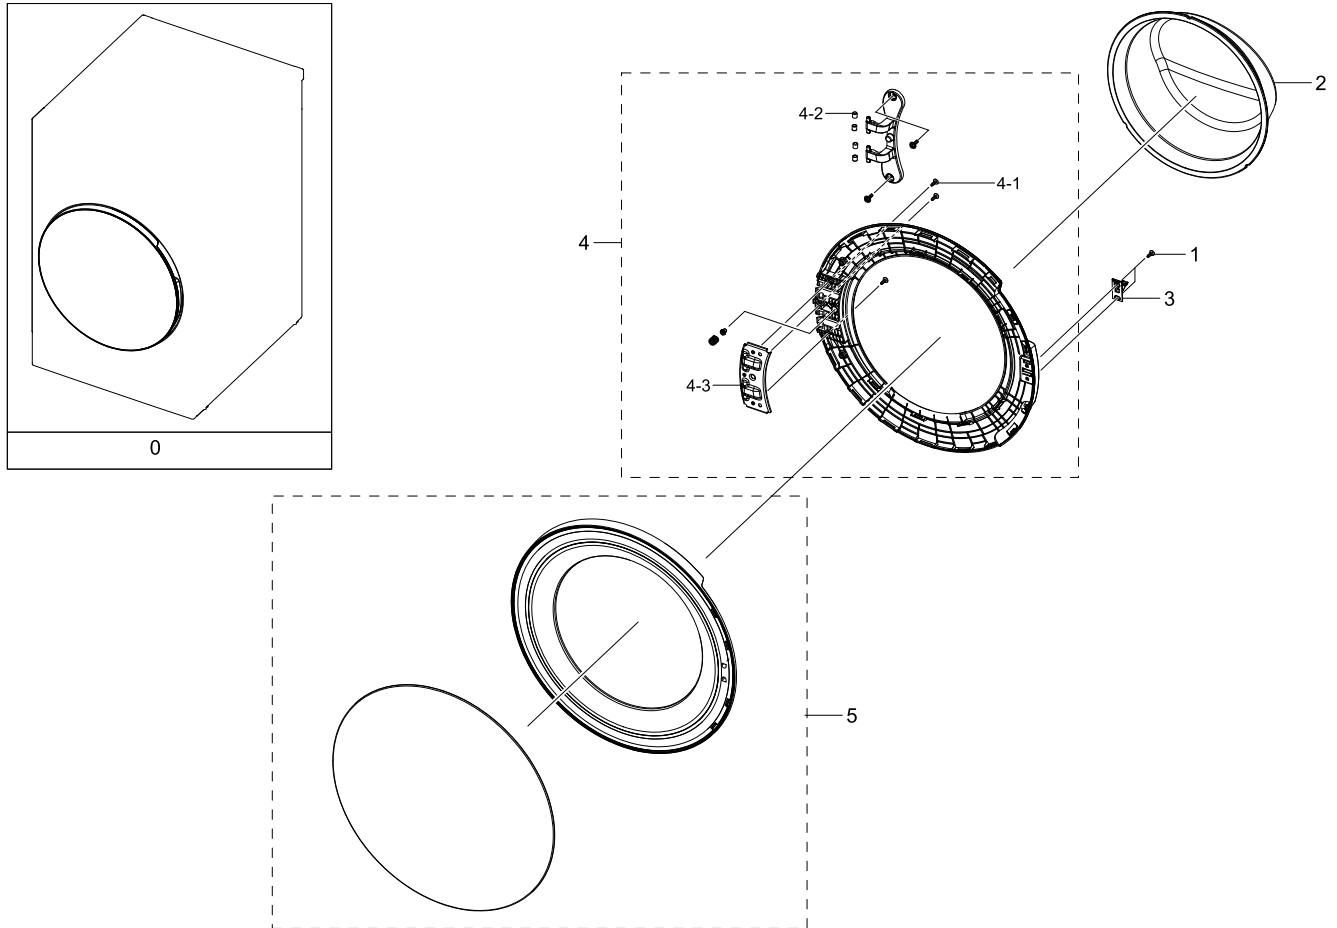

Parts List


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	2	W0459	DC97-23029K	ASSY DOOR; WD8000DK,VOLUME INCREASE	SA	1
1	3	W0105	6002-001279	SCREW-TAPPING; STS430,PASS,L12,M4,PWH,+,1	SA	2
2	3		DC64-04136A	DOOR GLASS; WF8000R,GLASS,T5,-,-,-,Tran	SNA	1
3	3	W0474	DC66-00375A	LEVER DOOR; 10KG DRUM, U-PJT,ZNDC,T2.5,NI	SC	1
4	3	W0454	DC97-22710C	ASSY HOLDER GLASS; WF9600BK,FLAT DESIGN,A	SNA	1
4-1	4	W0085	6001-001668	SCREW-MACHINE; STS430,PASS,L16,M5,TH,+,FP	SA	3
4-2	4	WD0090	DC61-00891A	GUIDE HINGE; HAUZEN(DOM),POM,-,-,K300,NAT	SA	4

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
4-3	4	M0047	DC61-02635A	SUPPORT HINGE; GI-SGCC,T1.4,L175.0,SBHG1-	SA	1
5	3	W0457	DC97-23028B	ASSY COVER DOOR; WF8400A,FLAT DESIGN, SEC	SA	1

5. ASSY BASE PARTS

ASSY BASE PARTS

Exploded View

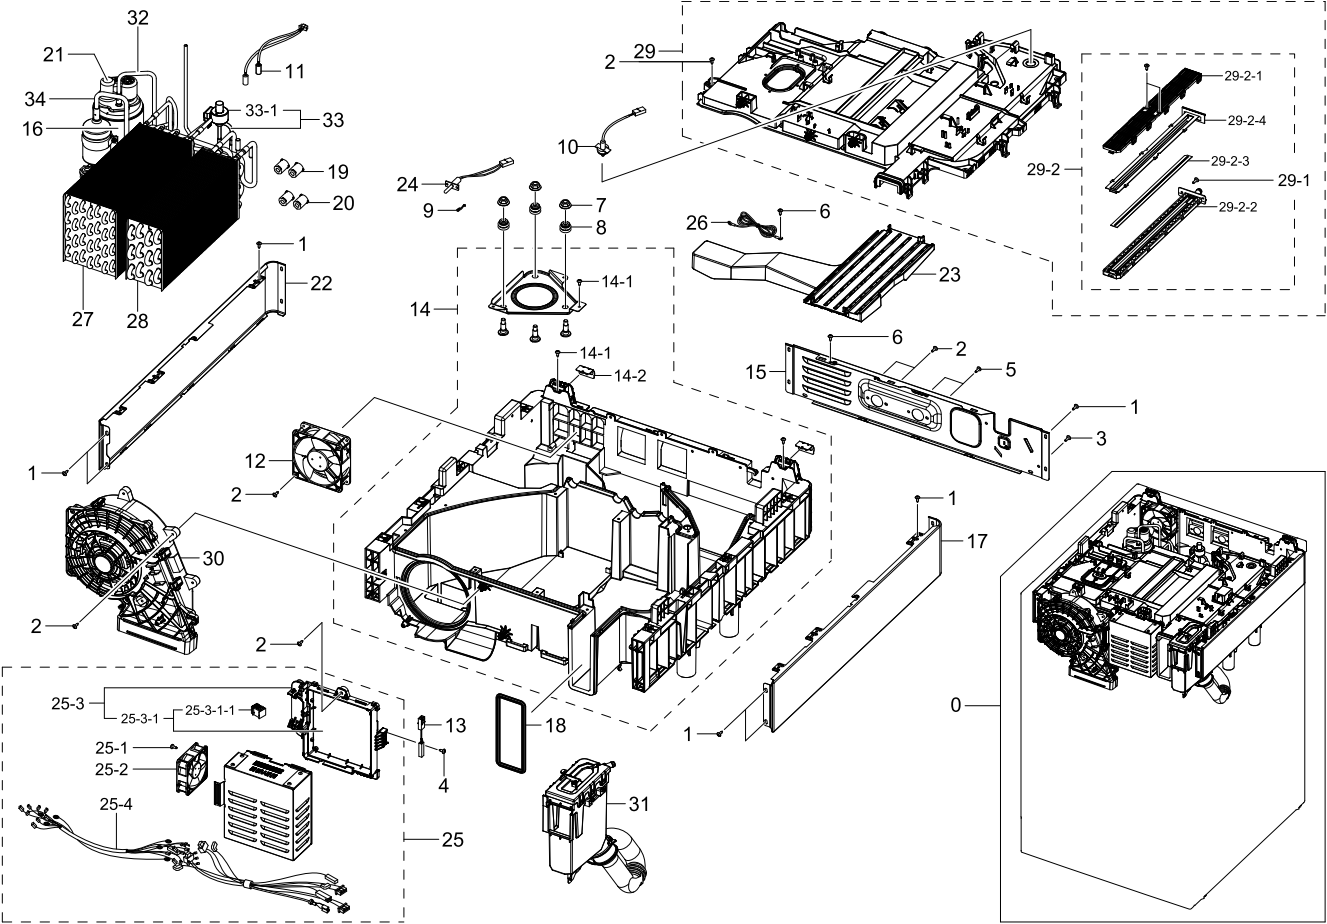

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	1		DC90-31420D	ASSY BASE PARTS; WD8000DK,GLOBAL,220V MOD	SA	1
1	2	WX0412	6002-000213	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T	SA	15
2	2	F0055	6003-000226	SCREW-TAPTYPE; SWRCH18A,ZPC(WHT),L8,M4,TH	SC	2
3	2	WX0490	6002-001431	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L16,M5,H	SA	4
4	2	W0105	6002-000630	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L8,M3,PH	SA	1
5	2	F0055	6003-000226	SCREW-TAPTYPE; SWRCH18A,ZPC(WHT),L8,M4,TH	SC	2
6	2	W0105	6006-001170	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L10,M4,T	SA	6


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
7	2	W0766	DB60-30028A	NUT-FLANGE; SWRCH18A,ZPC(WHT),HWH,M8,P1.2	SNA	3
8	2		DC63-03176A	GROMMET COMP; 39F,IIR,L21,ID12.1,OD19,BLA	SNA	3
9	2	S0224	DB81-00635A	SPRING ETC-SENSOR; DVM-SYSTEM,STS304,ID2.	SNA	3
10	2	W0638	DB95-04566B	ASSY THERMISTOR; -,10kohm,3%,25C,6phi,AC,	SA	1
11	2		DB95-05011D	ASSY THERMISTOR IN; SMH200-H06H3,L400,10k	SA	1
12	2		DC31-00198A	MOTOR BLDC FAN; F1238L12B0-FS-TTL-ACC,200	SA	1
13	2	M0002	DC34-00001G	SWITCH REED; DC5V,1.5A,Sensor : RHODIUM(M	SA	1
14	2		DC97-24191A	ASSY BOTTOM; WD8000D	SNA	1
14-1	3	WX0412	6002-000213	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T	SA	5
14-2	3		DC61-05943A	BRACKET COVER TOP; WD8000DK,GI-SGCC,T1.2,	SA	2
15	2		DC61-05886A	FRAME PLATE; WD8000D,GI-SGCC,-,T1.2,-,T	SNA	1
16	2		UX9BC3055FJDSG	RCP,COMP,RCP(DRYER),F,R134A; RCP,COMP,RCP(DRYER),F,R134A		1
17	2		DC97-24239A	ASSY FRAME-RIGHT; WD8000DK,T0.5	SA	1
18	2		DC62-00925A	SEAL AIR; WD8000D,Si,T1,-,-,-,T-PJT,-	SA	1
19	2		DC63-01644A	ABSORBER SOUND; DV90F5E6HGW,EPDM,-,D20.5,	SA	2
20	2		DC63-01645A	ABSORBER SOUND; DV90F5E6HGW,EPDM,-,D20.5,	SA	2
21	2		DC63-03094A	COVER TERMINAL; DV20B9760CV,MPPE,T2.5,-,E	SA	1
22	2		DC97-24238A	ASSY FRAME-LEFT; WD8000DK,T0.5	SA	1
23	2		DC63-03140A	COVER BASE; WD8000DK,PP+TD30%,T2.5,HB,DAR	SNA	1
24	2	W0638	DC90-10128G	SENSOR TEMP; L120,3.3kohm,5%,100C,5phi,WM	SA	1
25	2		DC92-03705C	ASSY COVER PCB W/HARNESS; WD8000DK,GLOBAL	SNA	1
25-1	3	W0105	6002-000239	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L8,M4,TH	SA	1
25-2	3		DC31-00197A	MOTOR BLDC FAN; G8025S12D1,2300rpm,12V,12	SA	1
25-3	3		DC92-03696A	ASSY PCB KIT; HW,INVERTER,T,146x160mm,220	SA	1
25-3-1	4		DC92-03697A	ASSY PCB INVERTER; INVERTER,WM_PFO5 (2-IN	SNA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
25-3-1-1	5		DC94-10402A	ASSY HEAT SINK 4; FWM_INV,WW5000T,160x194	SA	1
25-4	3		DC93-01060D	ASSY WIRE HARNESS-MAIN; DRUM-L,BASE MAIN,	SA	1
26	2		DC93-01064A	ASSY WIRE HARNESS-EARTH; DRUM-L,FERRITE C	SA	1
27	2		DC93-01066A	ASSY CONDENSER-COND; WD8000D,WD53DBA900HZ	SNA	1
28	2		DC93-01067A	ASSY CONDENSER-EVAP; WD8000D,WD53DBA900HZ	SNA	1
29	2		DC93-01068A	ASSY COVER CONDENSER; WD8000D	SNA	1
29-1	3	WX0412	6002-000213	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T	SA	1
29-2	3		DC97-24169A	ASSY NOZZLE; T-PJT,WD8000DK	SA	1
29-2-1	4		DC62-00912A	NOZZLE-UP; WD8000K,PP+TD30%,T3,DARK HOLDE	SA	1
29-2-2	4		DC62-00913A	NOZZLE-LOW; WD8000K,PP+TD30%,T3,DARK HOLD	SA	1
29-2-3	4		DC62-00915A	NOZZLE-MIDDLE; WD8000K,STS304,T0.4,-,-,-,	SNA	1
29-2-4	4		DC62-00919A	SEAL AIR; WD8000DK,EPDM,T2,-,-,BLACK,-,T-	SA	1
30	2	W0644	DC93-01069A	ASSY DUCT SCROLL; WD8000D	SA	1
31	2	W0163	DC97-24181C	ASSY HOUSING DRAWER; WD8000D	SA	1
32	2		DC97-24188A	ASSY PIPE-DISCHARGE; WD8000D,WD8000D,1000	SNA	1
33	2		DC97-24189A	ASSY PIPE-EEV; WD8000D,WD8000D,1000	SNA	1
33-1	3		DB62-12209A	VALVE COIL EXPAN; DC12V,COIL,500,15.45,MO	SA	1
34	2		DC97-24190A	ASSY PIPE-SUCTION; WD8000D,WD8000D,1000	SNA	1

5.1. ASSY DUCT SCROLL

ASSY DUCT SCROLL

Exploded View

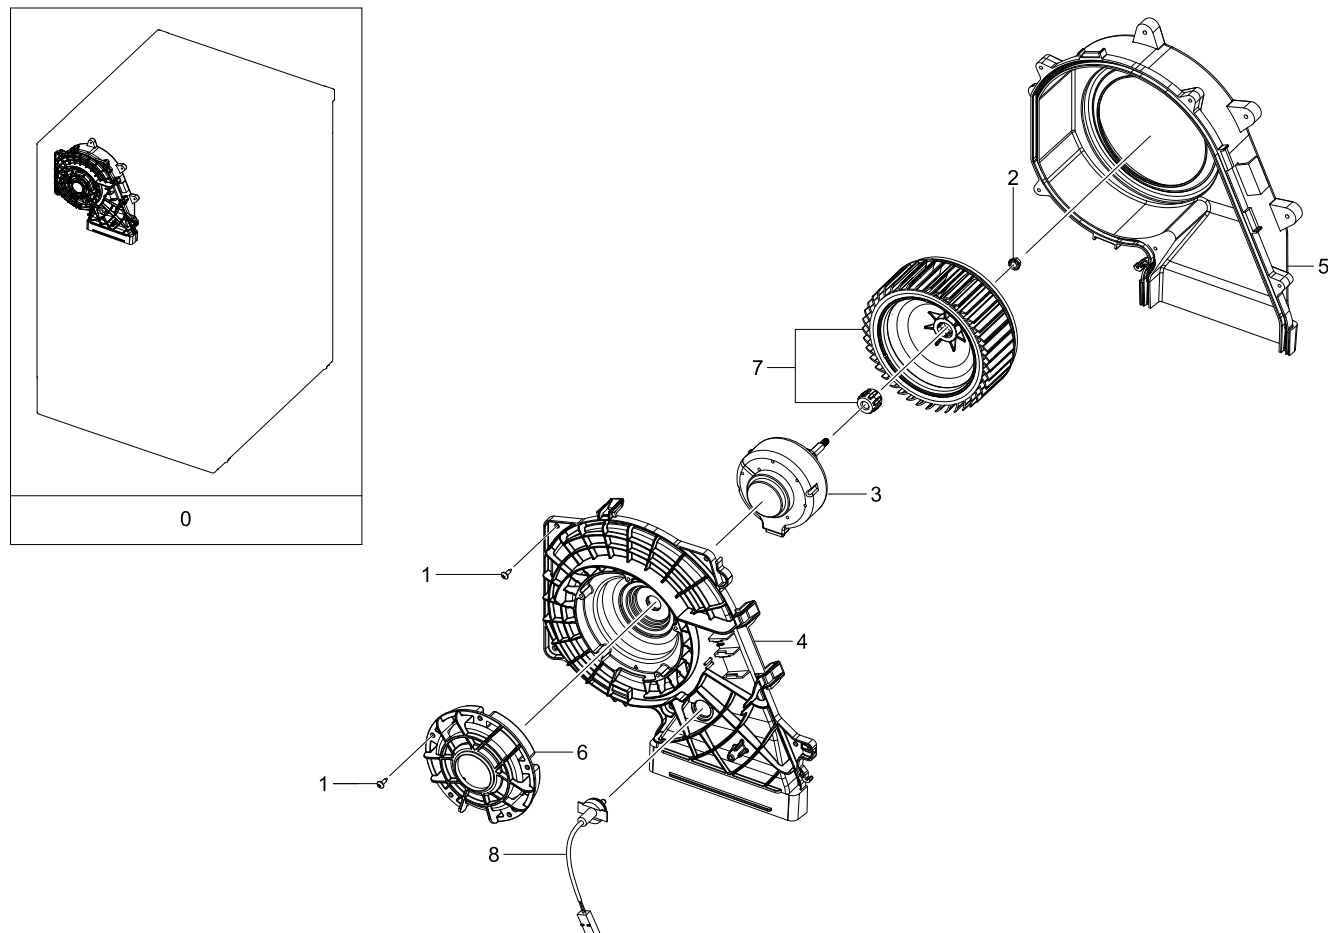

Parts List


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	2	W0644	DC93-01069A	ASSY DUCT SCROLL; WD8000D	SA	1
1	3	WX0616	6002-000215	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L16,M4,T	SA	10
2	3	U2022	6021-001580	NUT-HEXAGON FLANGE; STS304,ZPC(WHT),M6,FL	SNA	1
3	3		DC31-00194D	MOTOR BLDC FAN; DWD01255ZLA/SEC,2800RPM,3	SA	1
4	3		DC61-05915A	HOUSING FAN-FRONT; WD8000DK,PA66+GF30%,T2	SA	1
5	3		DC61-05916A	HOUSING FAN-REAR; WD8000DK,PA66+GF30%,T2.	SA	1
6	3		DC61-05917A	HOLDER MOTOR; WD8000DK,PA66+GF30%,T2.5,BL	SA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
7	3	M0079	DC67-01262A	FAN; PA66+GF30%,T2,V-0,KN332G30V0,BLACK,-	SA	1
8	3	W0638	DC90-10128G	SENSOR TEMP; L120,3.3kohm,5%,100C,5phi,WM	SA	1

5.2. ASSY HOUSING DRAWER

ASSY HOUSING DRAWER

Exploded View

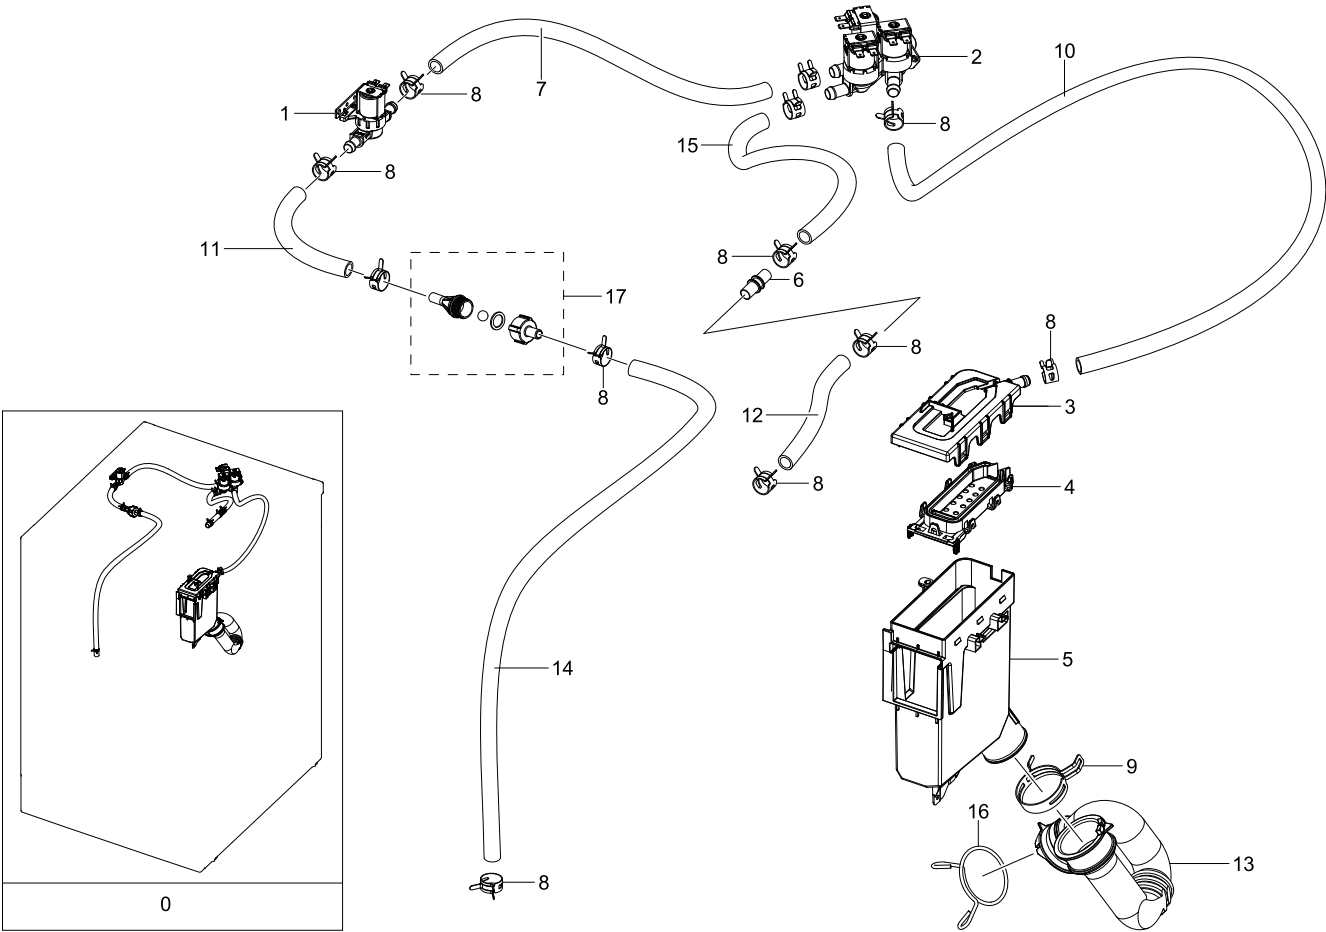

Parts List


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	2	W0163	DC97-24181C	ASSY HOUSING DRAWER; WD8000D	SA	1
1	3		DC33-01006B	VALVE WATER; DC12V,-,#250,1,1,-,Safety Va	SA	1
2	3		DC33-01012D	VALVE WATER; DC12V,mm,#250,1,3,5-11-11L/m	SA	1
3	3		DC61-05912A	HOUSING DRAWER-UP; WD8000D,PP+TD30%,T2,DA	SA	1
4	3		DC61-05913A	HOUSING DRAWER-MIDDLE; WD8000D,PP+TD30%,T	SA	1
5	3		DC61-05914A	HOUSING DRAWER-LOW; WD8000D,PP+TD30%,T2,D	SA	1
6	3		DC62-00176B	PIPE CONNECTOR; SEW-6HR129ATC,PP+TD30%,-,	SNA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
7	3		DC62-10089T	HOSE; WD8000D,PVC,ID10.2,T3,-,LIGHT GRAY,	SNA	1
8	3	W0615	DC65-00008A	CLAMPER HOSE; SEW-DR605,SK5,-,-,-,ID14.	SA	12
9	3	W0615	DC65-00029A	CLAMPER HOSE; WF210ANW/XAA,SK5,NATURAL,-,	SNA	1
10	3	W0151	DC67-00051F	HOSE DRAWER; WF8502NHW,EPDM,AEGIS	SA	1
11	3		DC67-01210N	HOSE DRAWER; COMMON,EPDM,ID9,T2.75,HS65,B	SNA	1
12	3		DC67-01210S	HOSE DRAWER; COMMON,EPDM,ID9,T2.75,HS65,B	SNA	1
13	3		DC67-01264A	HOSE DRAWER TUB; WD8000D,EPDM,ID48,T2,HS5	SA	1
14	3		DC67-01281A	HOSE; WD8000D,EPDM,ID10,T2.75,HS65,-,-,-,	SNA	1
15	3		DC67-01285A	HOSE NOZZLE; WD8000DK,EPDM,ID9,T2.75,HS70	SA	1
16	3		DC72-00001F	CLIP RING; SEW-HTR122L,HSWR,-,-,-,-,T3.0,	SA	1
17	3		DC93-00306A	ASSY S.NOZZLE CONNECTOR; WD0804,SCOUT COM	SA	1

6. ASSY DRAWER PARTS

ASSY DRAWER PARTS

Exploded View

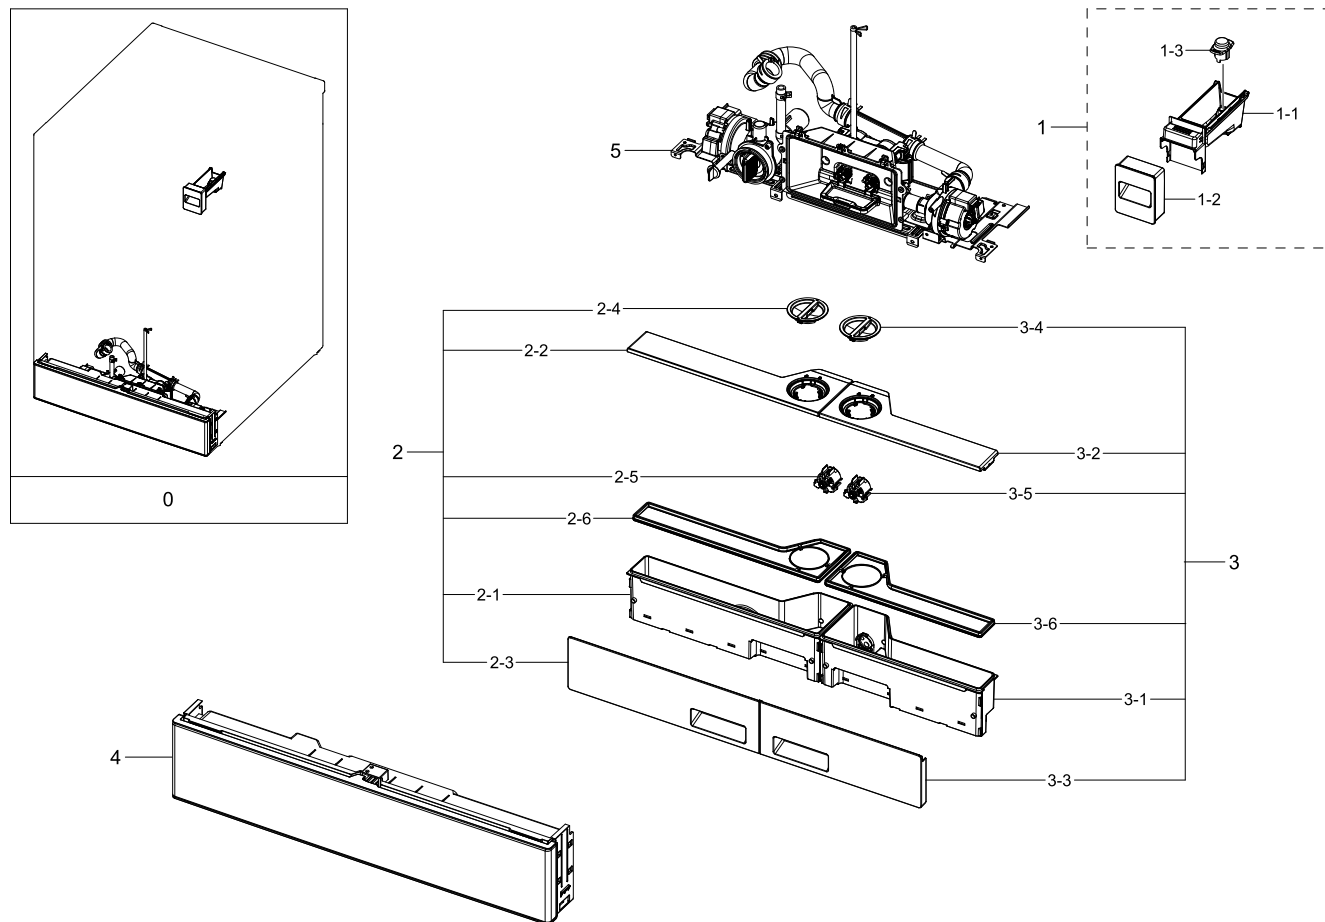

Parts List


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	1		DC90-31416F	ASSY DRAWER PARTS; WD8000DK,GLOBAL,ICON+E	SNA	1
1	2	W0216	DC97-24182B	ASSY DRAWER; WD8000D	SA	1
1-1	3		DC61-05922A	BODY DRAWER; WD8000D,PP+TD30%,T2,DARK GRA	SNA	1
1-2	3		DC64-04321B	HANDLE DRAWER; WD8000D,PP+TD30%,T2,FC2305	SNA	1
1-3	3		DC67-01060B	CAP DRAWER; WF8600A,PP+TD30%,T2,-,PTN960A	SA	1
2	2		DC97-24185A	ASSY S.DRAWER; WD8000D	SA	1
2-1	3		DC61-05908A	CASE DETERGENT; WD8000D,PP+TD30%,T2,DARK	SNA	1
2-2	3		DC63-03130A	COVER DETERGENT; WD8000D,PP,T2,-,HYGIENE	SA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
2-3	3		DC64-04330A	HANDLE DRAWER; WD8000D,ABS,T2,HG-0760GP,H	SNA	1
2-4	3		DC67-01245A	CAP; WF7500C,PP,T2,-,BJ750,COOL WHITE,-,W	SNA	1
2-5	3		DC97-23141C	ASSY CAP V.W; WF8000CK,WF25CB8695BK	SA	1
2-6	3		DC62-00917A	SEAL PACKING; WD8000D,TPE,T1.5,-,1855H,DA	SNA	1
3	2		DC97-24186A	ASSY S.DRAWER; WD8000D	SA	1
3-1	3		DC61-05907A	CASE RINSE; WD8000D,PP+TD30%,T2,DARK GRAY	SA	1
3-2	3		DC63-03131A	COVER RINSE; WD8000D,PP,T2,-,HYGIENE BLUE	SNA	1
3-3	3		DC64-04331A	HANDLE RINSE; WD8000D,ABS,T2,HG-0760GP,HB	SA	1
3-4	3		DC67-01245A	CAP; WF7500C,PP,T2,-,BJ750,COOL WHITE,-,W	SNA	1
3-5	3		DC97-23141C	ASSY CAP V.W; WF8000CK,WF25CB8695BK	SA	1
3-6	3		DC62-00918A	SEAL PACKING; WD8000D,TPE,T1.5,-,1855H,DA	SNA	1
4	2	W0630	DC97-24187A	ASSY COVER DRAWER; WD8000D	SA	1
5	2		DC97-24196B	ASSY BRACKET LOWER; WD8000D,WD25DB8995BZ	SNA	1

6.1. ASSY COVER DRAWER

ASSY COVER DRAWER

Exploded View

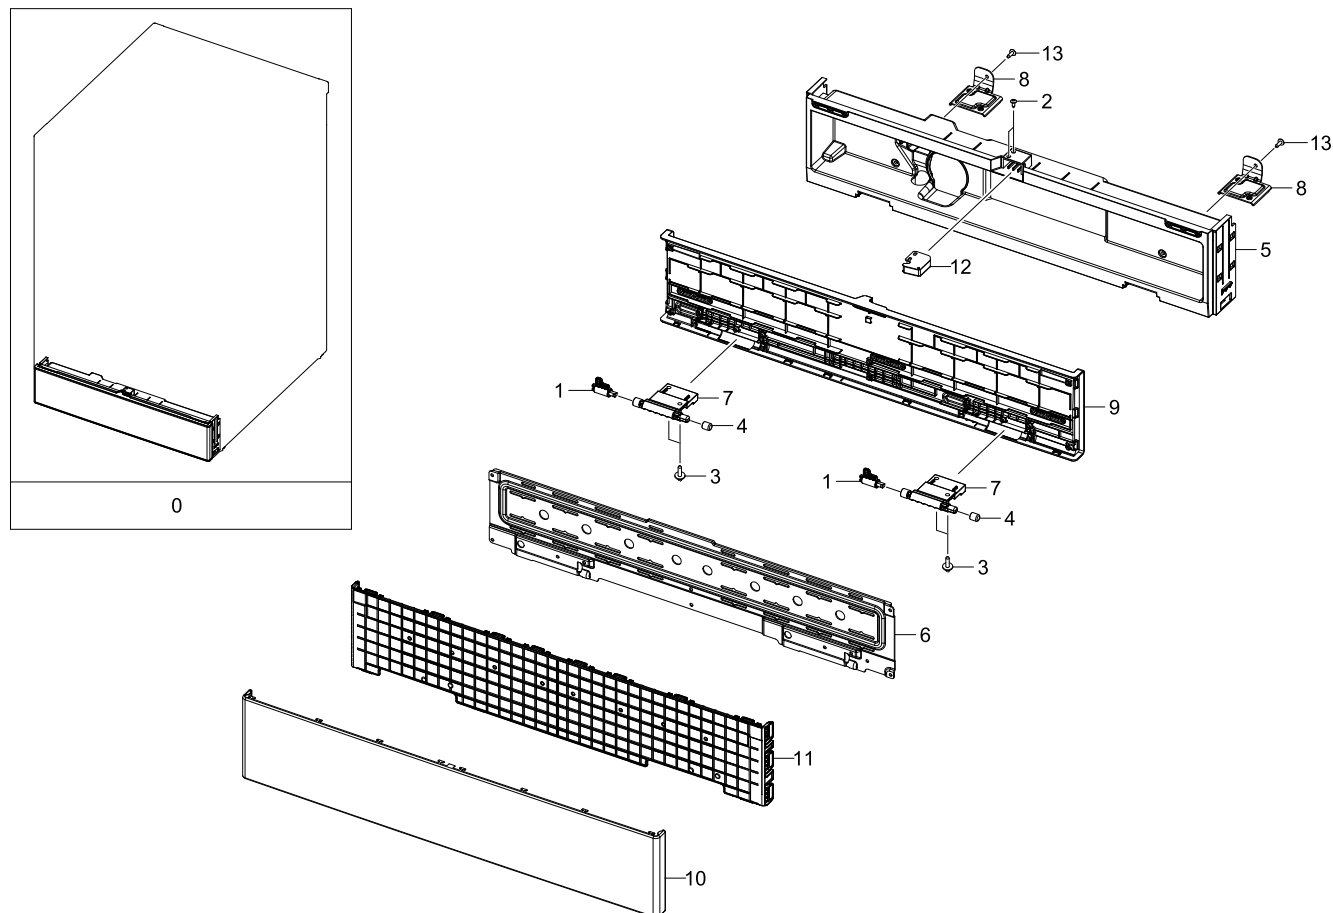

Parts List


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	2	W0630	DC97-24187A	ASSY COVER DRAWER; WD8000D	SA	1
1	3		DC66-01139A	DAMPER SHOCK-AXIS; WD8000DK,POM,-,-,-,4	SA	1
2	3	RW028	6002-000623	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,F	SA	1
3	3	G0425	6009-001522	SCREW-HEX; HWH,+,M5,L16,PASS,STS430,FP,SE	SA	4
4	3	WD0090	DC61-00891A	GUIDE HINGE; HAUZEN(DOM),POM,-,-,K300,NAT	SA	2
5	3		DC61-05909A	HOUSING DRAWER; WD8000D,ABS,T2.5,DARK GRA	SA	1
6	3		DC61-05911A	BRACKET HINGE; WD8000D,GI-SGCC,T1.6,-,-,-	SA	1
7	3		DC61-05920A	HINGE DOOR; WD8000D,PA66+GF30%,T2,BLACK,K	SA	2

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
8	3		DC61-05944A	SUPPORT HINGE; WD8000D,GI-SGCC,T1.4,-,-,-	SNA	2
9	3		DC63-03125A	COVER DRAWER; WD8000D,ABS,T3,HB,DARK GRAY	SNA	1
10	3		DC63-03126A	COVER FILTER-UP; WD8000D,EGI-SECD,T0.4,-,	SNA	1
11	3		DC63-03150A	COVER FILTER-BACK; WD8000D,PP+TD30%,T2,HB	SA	1
12	3		DC66-01134A	LATCH; WD8000D,ALCOAT-SA1C,T1,-,-,-,-,T-P	SA	1
13	3	W0105	6002-000239	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L8,M4,TH	SA	5

6.2. ASSY BRACKET LOWER

ASSY BRACKET LOWER

Exploded View

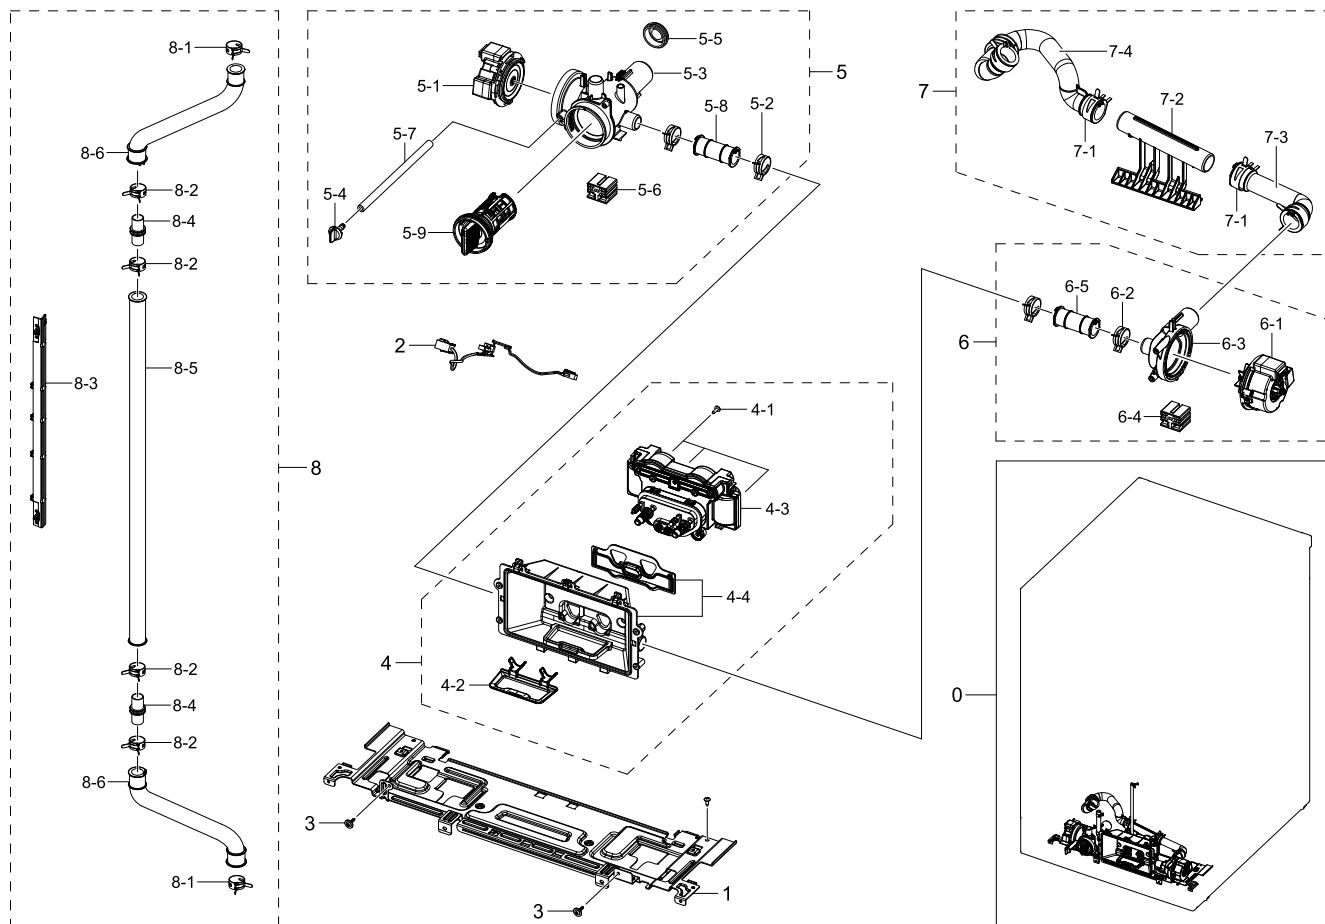

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	2		DC97-24196B	ASSY BRACKET LOWER; WD8000D,WD25DB8995BZ	SNA	1
1	3		DC61-05918A	BRACKET PUMP; WD8000D,GI-SGCC,T1.2,-,-,-,	SNA	1
2	3	W0224	DC93-01061A	ASSY WIRE HARNESS-PUMP; DRUM-L,AUTO DISPE	SA	1
3	3	M0030	DC97-14006A	ASSY SCREW; WF203,M4/L16	SA	2
4	3	W0163	DC97-24178A	ASSY HOUSING DRAWER; WD8000D	SA	1
4-1	4	WX0622	6002-001306	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L14,M4,T	SA	3
4-2	4		DC61-05921A	GUIDE LIQUID; WD8000D,PP+TD30%,T2,HB,PTN9	SNA	1
4-3	4	W0194	DC97-23140E	ASSY PUMP DRAIN; Z-PJT,WD9400D,DC12V	SA	1










No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
4-4	4	W0497	DC97-24206A	ASSY S.HOUSING DRAWER; WD8000D	SA	1
5	3	W0194	DC97-24179B	ASSY PUMP DRAIN; WD8000DK,WD25DB8995BZ,DR	SA	1
5-1	4		DC31-00200A	MOTOR BLDC PUMP; BD7-1A,0-4000RPM,24V,1.6	SA	1
5-2	4	W0615	DC61-01679B	CLAMPER HOSE; SEW-HFR167AR,SK5,T1.0/ID20.	SNA	2
5-3	4		DC61-05924A	CASE PUMP; WD8000D,PP+TD20%,T2,NATURAL,-,	SA	1
5-4	4	WI0107	DC61-10673A	CAP DRAIN; WF220ANW,PP,-,-,-,-,CNTK-P10	SNA	1
5-5	4	W0083	DC62-00299A	VALVE CHECK; BIGBANG,NBR,ID28.6/OD33,HS70	SA	1
5-6	4		DC63-00888A	CUSHION PUMP; WF448AAG,EPDM,40,BLACK	SNA	1
5-7	4		DC67-00244S	HOSE DRAIN; WD8000D,EPDM,ID6,T2.5,HS65,BL	SA	1
5-8	4		DC67-01265A	HOSE CONNECTOR; WD8000D,Si,ID19.8,T2,HS50	SA	1
5-9	4	G0050	DC97-24281A	ASSY FILTER; WW8000DK,DRAIN HOLE TYPE	SA	1
6	3	W0194	DC97-24180A	ASSY PUMP CIRCULATION; WD8000D,CIRCULATIO	SA	1
6-1	4		DC31-00200A	MOTOR BLDC PUMP; BD7-1A,0-4000RPM,24V,1.6	SA	1
6-2	4	W0615	DC61-01679B	CLAMPER HOSE; SEW-HFR167AR,SK5,T1.0/ID20.	SNA	2
6-3	4		DC61-05925A	CASE PUMP; WD8000D,PP+TD20%,T2,NATURAL,-,	SA	1
6-4	4		DC63-00888A	CUSHION PUMP; WF448AAG,EPDM,40,BLACK	SNA	1
6-5	4		DC67-01265A	HOSE CONNECTOR; WD8000D,Si,ID19.8,T2,HS50	SA	1
7	3	G0420	DC97-24207A	ASSY HOSE; WD8000D	SA	1
7-1	4	W0615	DC61-00219F	CLAMPER HOSE; SEW-HAR149AUA,SK5,-,-,-,-,I	SNA	4
7-2	4		DC61-05919A	GUIDE HOSE; WD8000D,PP+TD20%,T2,HB,FH2200	SA	1
7-3	4		DC67-01263A	HOSE CONNECTOR; WD8000D,EPDM,ID24.7,T2,HS	SA	1
7-4	4		DC67-01266A	HOSE AIR TUB; WD8000D,EPDM,ID24.5,T2,HS50	SA	1
8	3	G0420	DC97-24208A	ASSY HOSE; WD8000D	SA	1
8-1	4	W0615	DC61-00158A	CLAMPER HOSE; SW65ASP,SK5,T0.8,-,-	SNA	2
8-2	4	W0615	DC61-01679B	CLAMPER HOSE; SEW-HFR167AR,SK5,T1.0/ID20.	SNA	4

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
8-3	4		DC61-05904A	GUIDE HOSE; WD8000D,PP,T2,-,BJ750,NATURAL	SA	1
8-4	4		DC62-00911A	PIPE CONNECTOR HOSE; WD8000D,PP+TD30%,T1.	SNA	2
8-5	4		DC67-00829K	HOSE WATER; WD8000D,EPDM,ID16,T2.75,HS65,	SA	1
8-6	4		DC67-01284A	HOSE CONNECTOR; WD8000DK,EPDM,ID19,T2.75,	SA	2

7. SMALL PARTS

SMALL PARTS

Exploded View

				
1	2	3	4	5
				
6	7	8	9	10
				
11	12	13	14	

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	WI0293	DC61-01736B	HOLDER WIRE; WF337AAW,PA6,T2.3,NATURAL,-,	SA	1
2	2	W0616	DC61-00133A	CLAMPER HOSE-FIX; P1291,PP,NATURAL,-,-,BJ	SNA	2
3	4	M0034	DC61-02706A	HOLDER HOSE; WF210ANW,PA66,T2,NATURAL,-,-	SA	2
4	5	W0616	DC61-00118A	CLAMP-CABLE; P1291,PA66,NATURAL,-,-,101F,	SNA	1
5	2	M0001	DC61-00553B	CABLE CLAMP; DAWS-3NE,PA66,NTR	SNA	5
6	4	G0040	DC66-10003A	WIRE VINYL; SEW-100 JL,PVC,-	SNA	0

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
7	5		6502-000168	CABLE CLAMP; DA-6N,PA66,NAT,T1.0,ID10.0	SNA	1
8	2	WI0295	DC61-60074A	HOLDER WIRE; PA66,NATURAL,101F,rectangle	SA	5
9	4	W0623	DC61-00995A	HOLDER WIRE; DAWH,PA66,-,NATURAL,-,-,2110	SA	2
10	2	WI0293	DC61-40081A	HOLDER WIRE; DAWH-2NC,PA66,-,NATURAL,-,-,	SA	2
11	4		DC65-10001A	CABLE TIE; CT-140,NYLON66,NTR,T1.1,W3.5,L	SNA	3
12	3		6501-000121	CABLE TIE; DA-368,NYLON66,NTR,T1.5,W7.6,L	SNA	1
13	3		6501-000124	CABLE TIE; DACT200-4.8-L,NYLON66,BLACK,W4	SNA	1
14	3		DC61-04622A	HOLDER HOSE; WW8800M,PA66,T2.5,NATURAL,A2	SA	1