


1. MAIN

MAIN

Exploded View

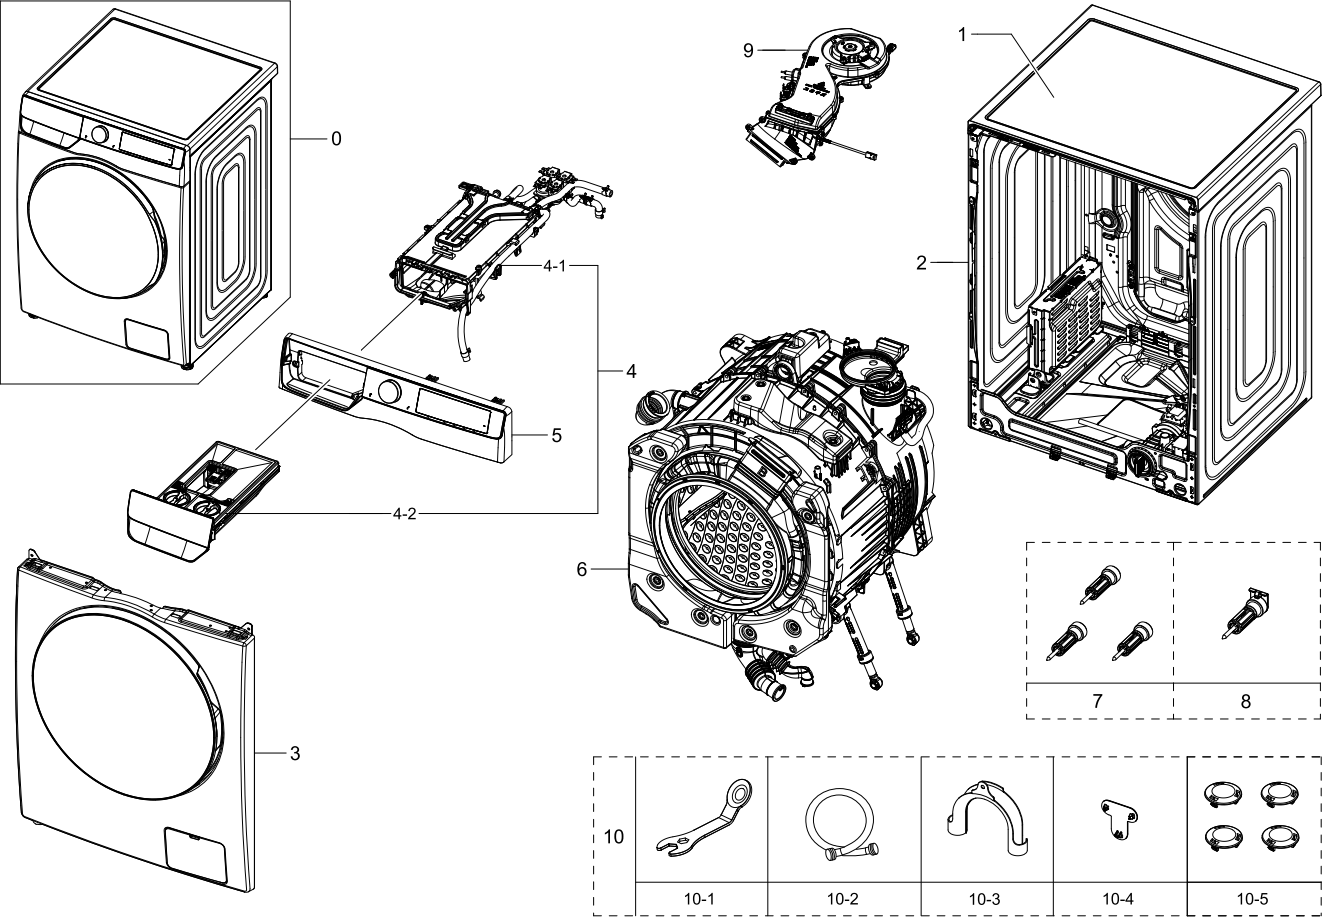

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	1		DC90-30100H	ASSY COVER TOP PARTS; B700 (U DESIGN),COM	SNA	1
2	1		DC90-31358R	ASSY FRAME PARTS; B700 (U DESIGN),BLACK,C	SNA	1
3	1		DC90-31360W	ASSY FRONT PARTS; B700 (U DESIGN),COMBO,B	SNA	1
4	1		DC90-31565A	ASSY DRAWER PARTS; B700 (U DESIGN),COMBO,	SNA	1
4-1	2		DC97-23337C	ASSY HOUSING DRAWER-MODULE; WD8400D,COMBO	SA	1
4-2	2	R0014	DC97-23983D	ASSY DRAWER; B700 (U DESIGN),3RD AD,BLACK	SA	1
5	1	C0002	DC97-24316A	ASSY PANEL CONTROL; WD6400D,GOOD,PACK1,BL	SA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
6	1	U0184	DC90-31691C	ASSY TUB & DRUM; 11KG,COMBO,AOW,SS,BB,220V,	SNA	1
7	2	W0603	DC97-14653C	ASSY FIXER TUB; SCOUT,WF0804Y8E/XEF	SA	3
8	2	U0111	DC97-14653G	ASSY FIXER TUB; WW5500K,FIXER WASHER	SA	1
9	1		DC90-31519A	ASSY DUCT AIR PARTS; WD8400D,220V	SNA	1
10	1	Y0101	DC98-03621W	ASSY ACCESSORY; B700 (U DESIGN),ADS,COLD	SNA	1
10-1	2	W0636	DC60-00104A	FASTENER-BOLT; ALL,CR-SPCC,T2,L113.5,-,-,	SA	1
10-2	2	I0040	DC62-00079A	ASSY HOSE WATER; P1405J,AQUA-STOP,L1500,G	SC	1
10-3	2	WH5379	DC62-10278A	HOSE HANGER; PUMP MODEL,PP,ID27,T1.5,HS95	SA	1
10-4	2	W0614	DC67-00208B	CAP-FIXER; WF8602NHS/XFA,PP,T1.5,COPO,BLA	SA	1
10-5	2	W0614	DC67-00307A	CAP-FIXER; WF438AAC/XAA,PP,T1.5,-,P-002HB	SA	4

ASSY FRAME PARTS

This exploded view diagram illustrates the assembly of a refrigerator, showing the relationship between various components and their assembly sequence. The components are numbered as follows:

- 0**: Refrigerator cabinet (main body).
- 1**: Refrigerator door assembly, including:
 - 1-1**: Door hinge pin.
 - 1-2**: Door hinge bracket.
 - 1-3**: Door hinge arm.
 - 1-4**: Door hinge plate, including **1-4-1** (screw) and **1-4-2** (plate).
 - 1-5**: Door hinge cap screw.
 - 1-6**: Door hinge cap screw.
 - 1-7**: Door hinge cap screw.
 - 1-8**: Door hinge cap screw.
 - 1-9**: Door hinge cap screw, including **1-9-1** (screw), **1-9-2** (screw), **1-9-3** (screw), **1-9-4** (screw), **1-9-5** (screw), **1-9-6** (screw), **1-9-6-1** (screw), and **1-9-7** (screw).
 - 1-10**: Door hinge cap screw.
 - 1-11**: Door hinge cap screw.
 - 1-12**: Door hinge cap screw.
 - 1-13**: Door hinge cap screw, including **1-13-1** (screw) and **1-13-2** (screw).
 - 1-13-3**: Door hinge cap screw.
- 2**: Refrigerator door panel, including:
 - 2-1**: Door panel frame.
 - 2-2**: Door panel frame.
 - 2-2-1**: Door panel frame.
- 3**: Refrigerator door panel, including:
 - 3-1**: Door panel frame.
 - 3-2**: Door panel frame.
 - 3-3**: Door panel frame, including **3-3-1** (screw), **3-3-1-1** (screw), **3-3-3** (screw), **3-3-4** (screw), **3-3-5** (screw), **3-3-6** (screw), **3-3-7** (screw), **3-3-8** (screw), **3-3-9** (screw), **3-3-10** (screw), **3-3-11** (screw), **3-3-12** (screw), **3-3-13** (screw), **3-3-14** (screw), **3-3-15** (screw), **3-3-16** (screw), **3-3-17** (screw), **3-3-18** (screw), **3-3-19** (screw), **3-3-20** (screw), **3-3-21** (screw), **3-3-22** (screw), **3-3-23** (screw), **3-3-24** (screw), **3-3-25** (screw), **3-3-26** (screw), **3-3-27** (screw), **3-3-28** (screw), **3-3-29** (screw), **3-3-30** (screw), **3-3-31** (screw), **3-3-32** (screw), **3-3-33** (screw), **3-3-34** (screw), **3-3-35** (screw), **3-3-36** (screw), **3-3-37** (screw), **3-3-38** (screw), **3-3-39** (screw), **3-3-40** (screw), **3-3-41** (screw), **3-3-42** (screw), **3-3-43** (screw), **3-3-44** (screw), **3-3-45** (screw), **3-3-46** (screw), **3-3-47** (screw), **3-3-48** (screw), **3-3-49** (screw), **3-3-50** (screw), **3-3-51** (screw), **3-3-52** (screw), **3-3-53** (screw), **3-3-54** (screw), **3-3-55** (screw), **3-3-56** (screw), **3-3-57** (screw), **3-3-58** (screw), **3-3-59** (screw), **3-3-60** (screw), **3-3-61** (screw), **3-3-62** (screw), **3-3-63** (screw), **3-3-64** (screw), **3-3-65** (screw), **3-3-66** (screw), **3-3-67** (screw), **3-3-68** (screw), **3-3-69** (screw), **3-3-70** (screw), **3-3-71** (screw), **3-3-72** (screw), **3-3-73** (screw), **3-3-74** (screw), **3-3-75** (screw), **3-3-76** (screw), **3-3-77** (screw), **3-3-78** (screw), **3-3-79** (screw), **3-3-80** (screw), **3-3-81** (screw), **3-3-82** (screw), **3-3-83** (screw), **3-3-84** (screw), **3-3-85** (screw), **3-3-86** (screw), **3-3-87** (screw), **3-3-88** (screw), **3-3-89** (screw), **3-3-90** (screw), **3-3-91** (screw), **3-3-92** (screw), **3-3-93** (screw), **3-3-94** (screw), **3-3-95** (screw), **3-3-96** (screw), **3-3-97** (screw), **3-3-98** (screw), **3-3-99** (screw), **3-3-100** (screw).

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	1		DC90-31358R	ASSY FRAME PARTS; B700 (U DESIGN),BLACK,C	SNA	1
1-1	2		DC61-01901C	GUIDE FRAME FRONT; -,POM,-,-,K300,NATURAL	SA	2
1-2	2		DC61-05584A	GUIDE HOSE DRAIN; B-PJT,ABS,-,HB,CNTK A-2	SA	1
1-3	2		DC61-05704A	FRAME PLATE-UP; B-COMBO,GI-SGCC,-,-,T1,-,	SNA	1
1-4	2	X0009	DC97-22637B	ASSY COVER BOTTOM; B700 (11KG),LEAKAGE SE	SA	1
1-4-1	3		DC96-01610A	ASSY SENSOR POLE; WW9000HE,12V,Y	SA	1
1-4-2	3	X0020	DC61-03478E	COVER-BOTTOM; B-COMBO,GI-SGCC,T0.4,-,-,-,	SNA	1


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1-5	2		DC63-02181A	COVER CONNECTOR; WW5500K (SEHC),PP,-,HB,N	SA	1
1-6	2	W0059	DC63-10002D	ABSORBER SPONGE; DV8500NK,PU FOAM,T10,BLA	SA	1
1-7	2	Z0040	DC97-14006A	ASSY SCREW; WF203,M4/L16	SA	2
1-8	2	I0022	DC97-20692B	ASSY HOSE DRAIN(O); WW5500K (SEHC),BLACK	SA	1
1-9	2	J0013	DC97-20781A	ASSY PUMP DRAIN; WW5500K,WW80K5410UW/EU,B	SNA	1
1-9-1	3		DC31-00181A	MOTOR AC PUMP; DRUM & AUTO,B15-6A/S3019/S30	SA	2
1-9-2	3	W0479	DC61-02271B	CASE PUMP; WF0804Y8E/XEF,PP+TD20%,T2.5,NA	SA	1
1-9-3	3	WO0031	DC63-00905A	CUSHION PUMP; WF8802DPF/XET,NBR,T1.5,D14,	SA	1
1-9-4	3		DC67-00244C	HOSE DRAIN; WF0804Y8E,EPDM,ID6,T2.5,HS0,B	SA	1
1-9-5	3		DC69-01128A	PACKING-PUMP; WF8804DP,BUTYL,T2.5,HEBA-PJ	SA	1
1-9-6	3	U0310	DC97-20822A	ASSY FILTER; F500E Platform	SA	1
1-9-6-1	4	W0633	DC63-00998A	FILTER PUMP; SCOUT-PJT,PP+TD20%,-,INNER G	SA	1
1-9-6-2	4		DC64-01317A	HANDLE FILTER; BAIKAL,PP+TD20%,FC2210,INN	SA	1
1-9-7	3	I0071	DC61-10673A	CAP DRAIN; WF220ANW,PP,-,-,-,CNTK-P10	SA	1
1-10	2		DD61-00140A	BRACKET-TAPPING; SDW-T120B,SWRCH10A,T0.6,	SNA	2
1-11	2	A0201	DC97-23109C	ASSY COVER BACK; B700 (11KG),SEHC,T0.4	SA	1
1-12	2	B0070	DC97-23484B	ASSY LEG; WW6000T,U-PJT,VE,48.5,M10,1.5,B	SA	4
1-13	2	F0028	DC97-24118E	ASSY FRAME; B700 (11KG),T0.8,BLACK CAVIAR	SA	1
1-13-1	3	WI0266	DC61-02065A	GUIDE SPRING; WF448AAG/XXA,POM,T4,HB,K300	SA	2
1-13-2	3		DC61-05705A	BRACKET SPRING-RIGHT; B-COMBO,GI-SGCC,T1.	SNA	1
1-13-3	3		DC61-05706A	BRACKET SPRING-LEFT; B-COMBO,GI-SGCC,T1.4	SA	1
2	1		DC90-30100H	ASSY COVER TOP PARTS; B700 (U DESIGN),COM	SNA	1
2-1	2	Z0062	6002-001431	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L16,M5,H	SA	2
2-2	2	P0001	DC97-23179H	ASSY COVER TOP; B700 (U DESIGN),COMBO,BLA	SA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
2-2-1	3	P0001	DC97-22310K	ASSY COVER TOP; B700 (U DESIGN),COMBO,BLA	SA	1
3	1		DC90-31517R	ASSY INNER PARTS; B700 (11KG),COMBO,220V,	SNA	1
3-1	2		DC29-00015K	FILTER EMI; 6.5mH,53X95.5X53mm,15A,V(14D6	SA	1
3-2	2		DC61-02029D	SPRING ETC-HANGER MODULE; WW6800M,HSWR,3.	SA	2
3-3	2		DC92-03743R	ASSY COVER PCB W/HARNESS; B700 (11KG),COM	SNA	1
3-3-1	3		DC97-22289A	ASSY COVER DOOR SWITCH; WW6000T	SNA	1
3-3-1-1	4		DC34-00028B	SWITCH DOOR LOCK; AC250V,16A,SOLENOID,DOO	SA	1
3-3-2	3		DC93-01073A	ASSY WIRE HARNESS-MAIN; DRUM-M,F-FrontWM-	SA	1
3-3-3	3		DC94-15302R	ASSY PCB EEPROM; 0xDB85,B11_COMBO,BC+DB85	SA	1
3-3-3-1	4		DC92-03722A	ASSY PCB KIT; HW,FWM_MAIN,B-COMBO,197x242	SNA	1
3-3-3-1-1	6		DC94-15267A	ASSY PCB MANUAL; FWM_MAIN,B-COMBO,197x242	SA	1
3-3-4	3		DC97-24301A	ASSY TRANS REACTOR; B700,COMBO	SA	1
3-3-4-1	4		DC27-00012A	COIL HARMONIC; 4.5mH,40x69x39mm,3A,-	SA	1
3-3-5	3		DC63-03082A	COVER PCB; WW7000T,GI-SGCC,T0.4,-,-,-,P	SNA	1
3-3-6	3		DC92-02515R	ASSY PCB KIT; HW,INVERTER,B11-COMBO,121x9	SA	1
3-3-7	3		DC63-03010A	COVER PBA; B-COMBO,ABS,T2.5,5VA,NATURAL,-	SNA	1
4	2	W0467	DC96-00146A	POWER CORD-AT; H05VV-F 3x1.5mm2,GRY,EU3F,	SC	1
5	2	A0241	DC98-05243S	ASSY MANUAL; WD6400D,WD90DG6B85BBU3,EUROP	SNA	1
5-1	3		6902-003436	BAG PE; HDPE,T0.015,W200,L350,TRP,RECYCLE	SA	1

3. ASSY TUB & DRUM PARTS

ASSY TUB & DRUM PARTS

Exploded View

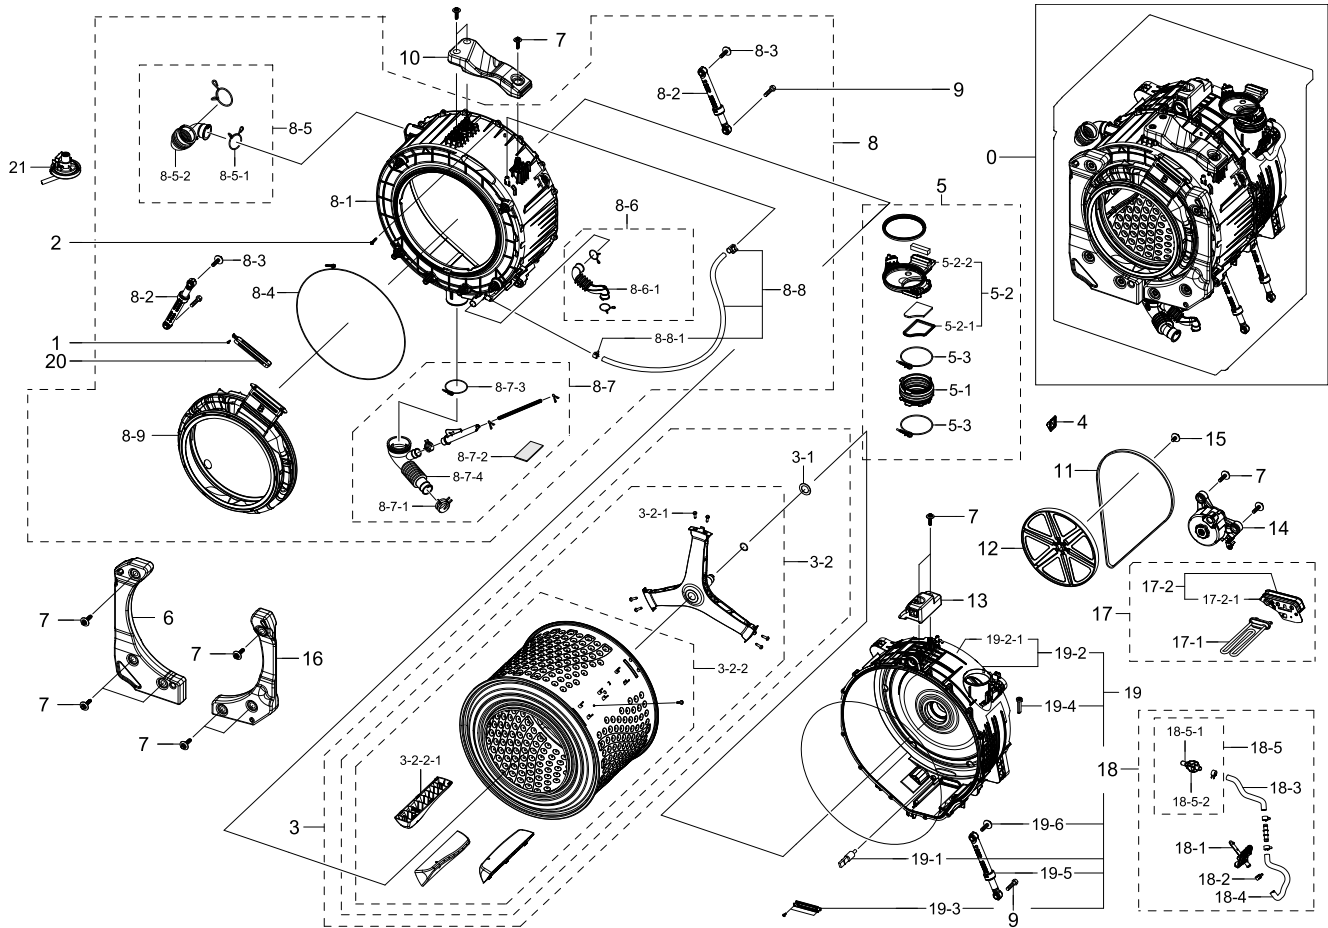

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	WX0441	6002-000520	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L12,M4,T	SNA	27
2	2	G0049	6009-001367	BOLT-HEX; M6.5,L32,ZPC(WHT),HWH,+,SWRCH18	SNA	15
3	2		DC90-31353A	ASSY DRUM PARTS; B700 (11KG),SEHC	SNA	1
3-1	3	U0362	DC60-00132A	WASHER-SPRING; -,STS304,T0.5,-,-,ID35.2	SA	1
3-2	3		DC97-24113A	ASSY DRUM-MODULE; WW7000T,11KG,SEHC	SA	1
3-2-1	4	WJ5081	DC60-40137A	BOLT HEX; MARS-PJT,STS430,-,L30,-,-,HEX	SA	6
3-2-2	4	R0011	DC97-24114A	ASSY DRUM WRAPPER; WW7000T,11KG,SEHC	SA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
3-2-2-1	5		DC66-00827A	DRUM LIFTER; H900E,PP+TD20%,-,T3,HB,FC221	SA	3
4	2		DC61-05449B	CASE FILTER; WD9000C,PP+TD30%,-,DARK HOLD	SA	1
5	2	F0225	DC93-01036A	ASSY DUCT CONNECTOR; WD5000C	SA	1
5-1	3		DC67-01241A	HOSE CONNECTOR; WD9000C,EPDM,ID90,T2.5,HS	SA	1
5-2	3		DC93-01037A	ASSY S.DUCT CONNECTOR; WD5000C	SA	1
5-2-1	4		DC67-01254A	DUCT CONNECTOR-LOW; PP+TD30%,-,HB,FC2305,	SA	1
5-2-2	4		DC67-01255A	DUCT CONNECTOR-UP; PP+TD30%,-,HB,FC2305,N	SA	1
5-3	3		DC97-14618B	ASSY CLAMP DIAPHRAGM; WD8000J-PJT , L322	SA	2
6	2		DC67-01239A	WEIGHT BALANCER-LEFT MODULE; WD9000C,CONC	SA	1
7	2	W0601	DC97-14263A	ASSY BOLT; MOTOR/BOLT(M8)+WASHER(OD27.5),	SA	13
8	2	U0026	DC97-24123C	ASSY TUB FRONT; B700(11KG),COMBO,SUPER SP	SNA	1
8-1	3		DC61-05514B	TUB FRONT; WD9000B,PP+GF30%,T0.35,NATURAL	SA	1
8-2	3		DC66-00470G	DAMPER SHOCK-MODULE; 24" Drum,PP/RUBBER/S	SA	3
8-3	3	W0601	DC97-14263A	ASSY BOLT; MOTOR/BOLT(M8)+WASHER(OD27.5),	SA	3
8-4	3		DC97-14618A	ASSY CLAMP DIAPHRAGM; WF8804DP,OD2.0/L124	SA	1
8-5	3	R0151	DC97-14874J	ASSY HOSE DRAWER; WD9400C	SA	1
8-5-1	4		DC61-04117A	CLIP RING; -,HSWR,-,-,-,ID37,T3.0	SA	1
8-5-2	4		DC67-01230A	HOSE DRAWER TUB; WD9000C,EPDM,ID35,T2,HS5	SA	1
8-6	3		DC97-17339A	ASSY HOSE AIR-TUB; F500E,WF80F5E5U4W/EF,B	SA	1
8-6-1	4		DC67-00671A	HOSE AIR TUB; F500,EPDM,ID19.3,T2.5,BLACK	SA	1
8-7	3	I0070	DC97-20750B	ASSY HOSE PRESSURE; 600mmH20,No PBA,B-COM	SA	1
8-7-1	4	N0010	DC61-00219C	CLAMPER HOSE; -,SK5,ID35,-,-,ZPC2	SA	1
8-7-2	4		DC63-10003N	ABSORBER SPONGE; -,PU FOAM,T70,D50,-,BLAC	SA	1
8-7-3	4	W0744	DC65-00021A	CLAMPER HOSE-JOINT; HEBA PJT,HSWR,-,-,-,-	SA	1
8-7-4	4	I0003	DC67-00230P	HOSE WATER; WV26R9980KV,EPDM,ID4.5,-,-,DA	SA	1


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
8-8	3		DC97-22260A	ASSY HOSE CIRCULATION; F500E,EPDM,ID9.0,B	SA	1
8-8-1	4	W0615	DC65-00008B	CLAMPER HOSE; SSEC-GE,SK5,-,-,-,ID14.2,	SA	1
8-9	4		DC64-04201B	DOOR DIAPHRAGM; B-Combo,TPE,-,-,ER7000DA,	SA	1
9	2	U0320	6011-001644	BOLT-HEX; M10,L35,ZPC(WHT),HH,+,SM10C,DAM	SNA	3
10	2		DC67-01229A	WEIGHT BALANCER-UP MODULE; WD5000C_Up Fro	SA	1
11	2	U0095	6602-004363	BELT-TIMING GEAR; WW6000T,RUBBER,BLK,T3.2	SA	1
12	2		DC66-00767D	PULLEY MOTOR; WW7100A,PA6+GF60%,NATURAL,-	SA	1
13	2		DC67-01227A	WEIGHT BALANCER-UP MODULE; WD5000C_Up Rea	SA	1
14	2		DC93-00986A	ASSY MOTOR BLDC-MODULE; B-PJT,PWM 0~220V,	SA	1
15	2	U0051	DC97-06080G	ASSY BOLT; SWRCH10AK,L36.2,M12,Washer 38	SA	1
16	2		DC67-01228A	WEIGHT BALANCER-RIGHT MODULE; WD5000C,CON	SA	1
17	2	U0392	DC97-21673A	ASSY BRACKET HEATER; 230V,2000W,NTR	SNA	1
17-1	3		DC47-00033B	HEATER WASH; AC230V,2000W,SUS316L,728mm,N	SA	1
17-2	3		DC97-22262A	ASSY COVER HEATER; WW4000J,-,NH-1000T	SA	1
17-2-1	4		DC63-01553A	COVER HEATER; F500 PJT,ABS,5VA,NATURAL,VE	SA	1
18	2	S0023	DC97-23116B	ASSY NOZZLE; WD9000C	SA	1
18-1	3	U0200	DC62-00823A	NOZZLE; WD5100B,PP+TD30%,-,NATURAL,-,HB	SNA	1
18-2	3	W0615	DC65-00008B	CLAMPER HOSE; SSEC-GE,SK5,-,-,-,ID14.2,	SA	16
18-3	3	I0003	DC67-01174A	HOSE WATER; WD5100B,EPDM,ID9,T2.75,HS65,B	SNA	1
18-4	3		DC67-01179A	HOSE NOZZLE; WD5100B,EPDM,ID9,T2.75,HS50,	SNA	1
18-5	3		DC93-00306A	ASSY S.NOZZLE CONNECTOR; WD0804,SCOUT COM	SA	2
18-5-1	4	M0031	DC62-00182A	NOZZLE CONNECTOR-UP; COMBO,POM,-,NATURAL,	SA	2
18-5-2	4	M0032	DC62-00183A	NOZZLE CONNECTOR-LOW; COMBO,POM,-,NATURAL	SA	2
19	2	U0013	DC97-24116C	ASSY TUB BACK; B700(11KG), SEHC,COMBO, AO	SNA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
19-1	3	M0487	DC32-00010C	SENSOR TEMP; L120,3.243kohm,2%,60C,9.8phi	SA	1
19-2	3	U0092	DC97-24115C	ASSY SEMI TUB BACK; B700(11KG), SEHC,COMB	SA	1
19-2-1	4		DC61-05515D	TUB BACK; WD9000B,PP+GF30%,-,NATURAL,-,-,	SA	1
19-3	3	W0230	DC61-02874A	BRACKET HEATER; WD0704CQR,STS430,T0.5,-,-	SA	1
19-4	3		DC62-00411B	NOZZLE CONNECTOR; POM,-,NATURAL,-,HB,K300	SA	1
19-5	3		DC66-00470G	DAMPER SHOCK-MODULE; 24" Drum,PP/RUBBER/S	SA	3
19-6	3	W0601	DC97-14263A	ASSY BOLT; MOTOR/BOLT(M8)+WASHER(OD27.5),	SA	3
20	2		DC65-00041A	CLAMPER DIAPHRAGM; WD8000J,EGI-SECC,-,-,-	SNA	1
21	2	H2050	DC96-01703G	SENSOR PRESSURE; Air,5V,L0,400mmH2O	SA	1

4. ASSY FRONT PARTS

ASSY FRONT PARTS

Exploded View

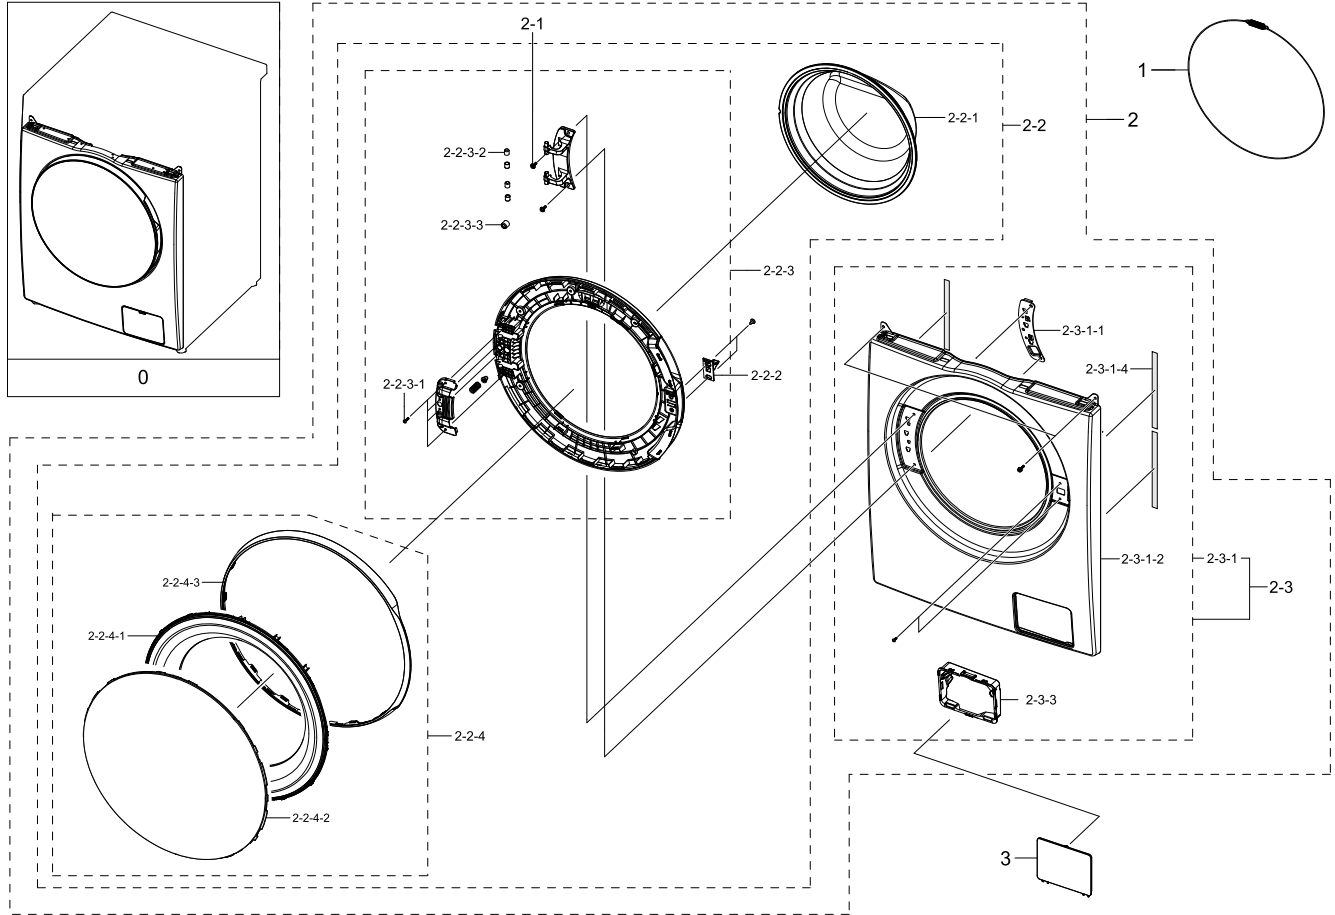

Parts List


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	1		DC90-31360W	ASSY FRONT PARTS; B700 (U DESIGN),COMBO,B	SNA	1
1	2	W0021	DC91-12078D	ASSY WIRE DIAPHRAGM; HEBA-PJT,-,-,-,-	SA	1
2	2	F0064	DC97-24119W	ASSY FRAME FRONT; B700 (U DESIGN),COMBO,B	SNA	1
2-1	3	G0425	6009-001522	SCREW-HEX; HWH,+,M5,L16,PASS,STS430,FP,SE	SA	2
2-2	3		DC97-22702B	ASSY DOOR-MODULE; U-PJT,BETTER DOOR,NON A	SA	1
2-2-1	4	WD0070	DC64-01521A	DOOR GLASS; WF8804DP,GLASS,T5,-,-,NATURAL	SA	1
2-2-2	4	D0107	DC66-00375A	LEVER DOOR; 10KG DRUM, U-PJT,ZNDC,T2.5,NI	SC	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
2-2-3	4	D0132	DC97-22569A	ASSY HOLDER GLASS; WW5000T,WW12T794DSX/SP	SNA	1
2-2-3-1	5	Z0062	6002-000215	SCREW-TAPPING; SWRCH18A,ZPC(WHT),L16,M4,T	SA	4
2-2-3-2	5	WD0090	DC61-00891A	GUIDE HINGE; HAUZEN(DOM),POM,-,-,K300,NAT	SA	3
2-2-3-3	5		DC61-02197A	GUIDE WIRE; U-PJT,POM,T1,HB,K300,NATURAL,	SA	1
2-2-4	4		DC97-22706B	ASSY COVER DOOR-SEMI; U-PJT,NO ADD WASH,B	SA	1
2-2-4-1	5		DC63-02608A	COVER GLASS; U-PJT,ABS,T2.5,-,BLACK CAVIA	SA	1
2-2-4-2	5		DC64-03953B	DOOR SAFETY; U-PJT,MBS,ZYLAR-261,GRAND BL	SA	1
2-2-4-3	5		DC64-03949A	DECORATION COVER DOOR; DV90T5740BV,ABS,T2	SA	1
2-3	3		DC97-24120S	ASSY FRAME FRONT-SEMI; B700 (U DESIGN),CO	SA	1
2-3-1	4	F0064	DC97-24128D	ASSY FRAME FRONT; B700 (U DESIGN),COMBO,B	SA	1
2-3-1-1	5		DC61-01919B	BRACKET HINGE; WW6500K,GI-SGCC,T1.4,-,-,-	SA	1
2-3-1-2	5		DC61-05306C	FRAME FRONT; WW6000T,EGI-SECD,-,BLACK CAV	SA	1
2-3-1-4	5		DC63-10001E	ABSORBER SPONGE; WR9900M,EPDM,T1,GRAY,W15	SA	4
2-3-3	5		DC61-05452A	GUIDE FILTER; WW90T754DBX/S6,PP,T2.5,RM60	SA	1
3	2		DC63-02831C	COVER FILTER; U-PJT,ABS,T2,-,BLACK CAVIAR	SA	1

5. ASSY PANEL CONTROL PARTS

ASSY PANEL CONTROL PARTS

Exploded View

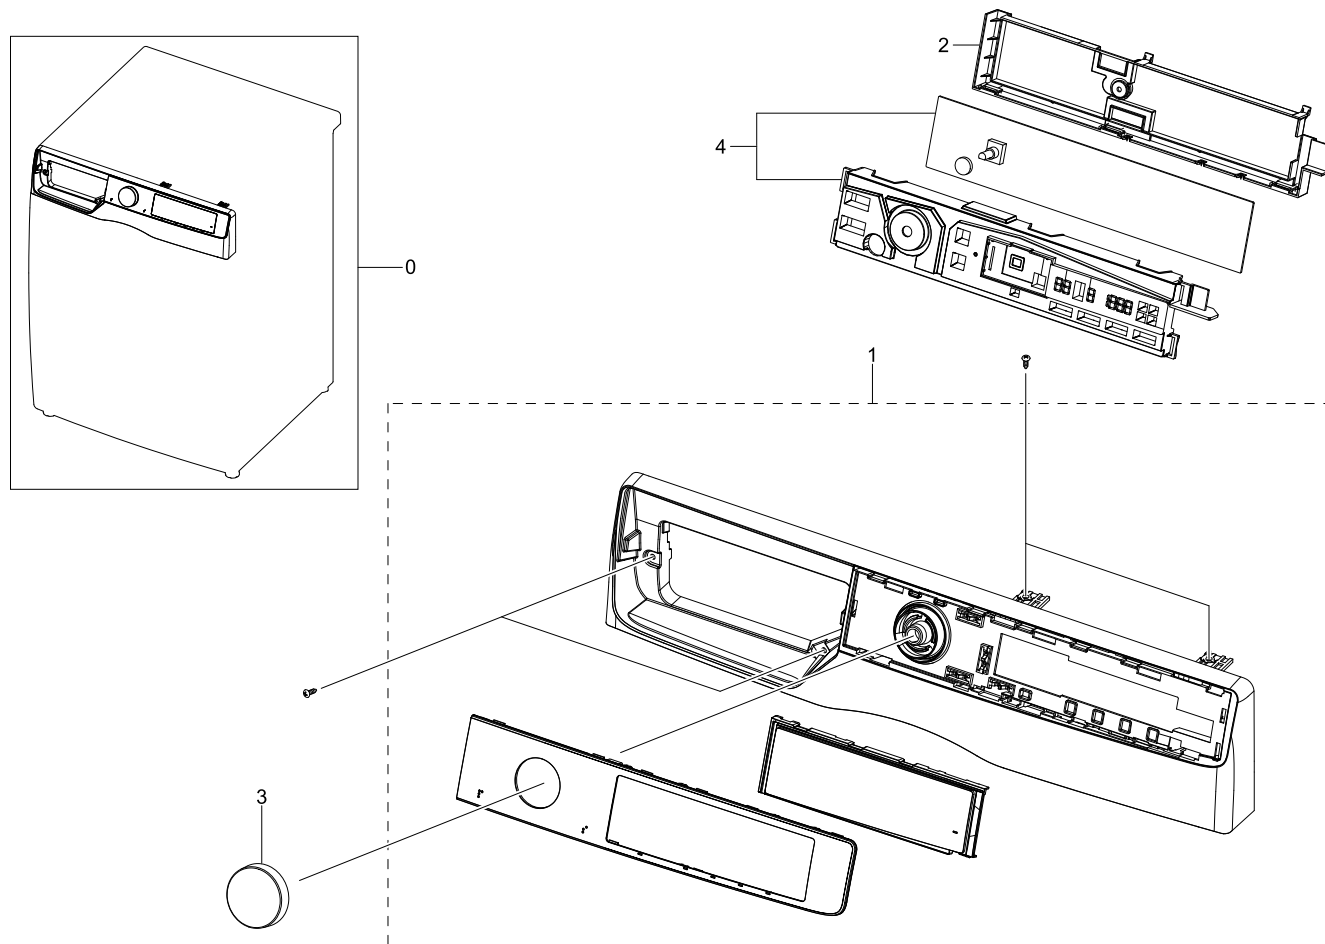


Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	1	C0002	DC97-24316A	ASSY PANEL CONTROL; WD6400D,GOOD,PACK1,BL	SA	1
1	2		DC97-22384L	ASSY PANEL CONTROL-MODULE; U-PJT,GOOD,BLA	SA	1
2	2		DC63-02571A	COVER PCB-SUB; DV90T5740BV,PP+TD30%,T2,HB	SA	1
3	2		DC64-03921A	KNOB ENCODER; A1 SIMPLE,ABS,-,HB,NATURAL,	SA	1
4	2		DC92-03711G	ASSY PBA MODULE; SW,FWM_TOUCH,WD6000D,GEN	SA	1

6. ASSY DRAWER PARTS

ASSY DRAWER PARTS

Exploded View

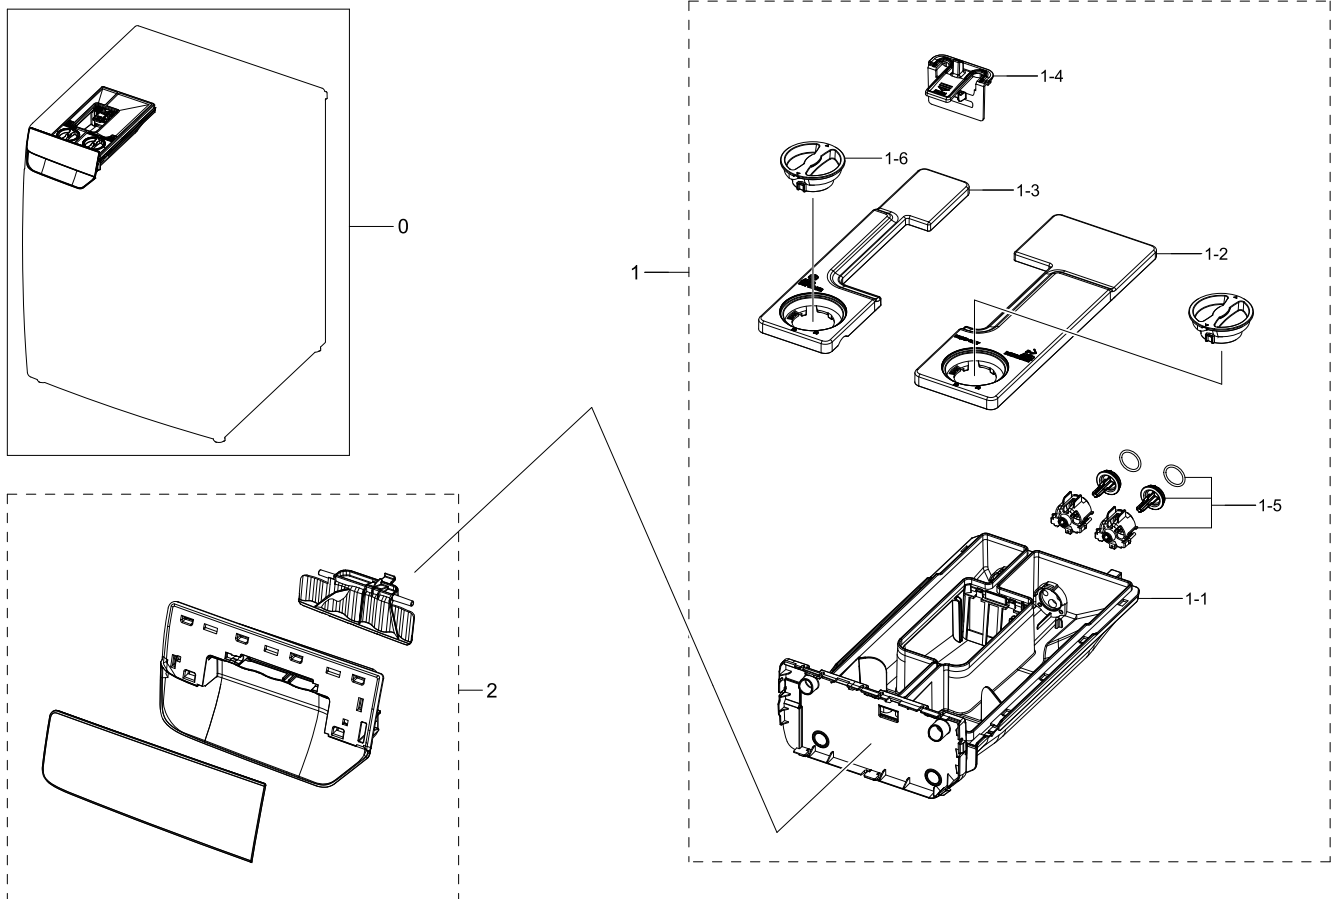

Parts List


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	2	R0014	DC97-23983D	ASSY DRAWER; B700 (U DESIGN),3RD AD,BLACK	SA	1
1	3	R0014	DC97-23338E	ASSY DRAWER; WW7000T,AOW,GLOBAL	SA	1
1-1	4		DC61-05580E	BODY DRAWER; WW7000T,PP+TD30%,-,DA WHITE,	SA	1
1-2	4		DC63-02940A	COVER DETERGENT; WW9400B,LDPE,T2.5,-,HYGI	SNA	1
1-3	4		DC63-02941A	COVER RINSE; WW9400B,LDPE,T2.5,-,HYGIENE	SNA	1
1-4	4		DC67-00928A	CAP GUIDE WATER; WW8800M,PP+TD30%,MT43,HO	SA	1
1-5	4	A0042	DC97-23141C	ASSY CAP V.W; WF8000CK,WF25CB8695BK	SA	2

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1-6	4		DC67-01107B	CAP; WF8800A,PP+TD30%,T2,-,PTN960A,COOL W	SA	2
2	3	R0025	DC97-23982H	ASSY PANEL DRAWER; B700 (U DESIGN),3RD AD	SA	1

7. ASSY HOUSING DRAWER PARTS

ASSY HOUSING DRAWER PARTS

Exploded View

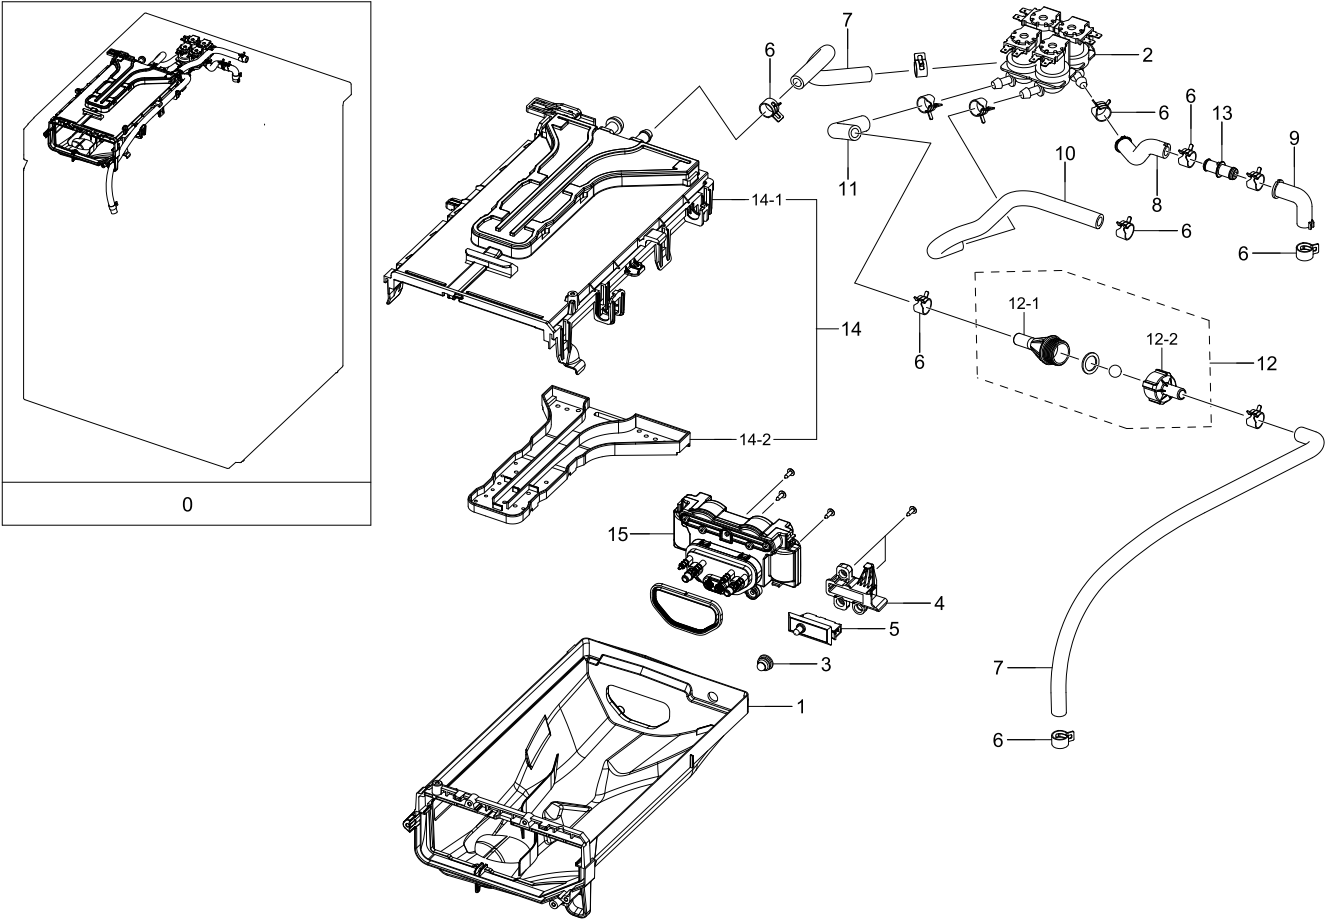

Parts List


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	2		DC97-23337C	ASSY HOUSING DRAWER-MODULE; WD8400D,COMBO	SA	1
1	3		DC61-05577F	HOUSING DRAWER-LOW; WW9000B,PP+TD30%,T2,N	SA	1
2	3	W0032	DC62-00214N	VALVE WATER; AC220-240V,mm,#250,1,4,11-11	SA	1
3	3		DC62-00559A	SEAL RUBBER; WW10M86DQOO/EU,Si,-,-,-,-,-,-,-	SA	1
4	3		DC63-02160B	COVER DOOR SWITCH; PP+TD30%,T2,-,NATURAL,	SA	1
5	3		DC64-00828H	SWITCH DOOR; AC125/250V,0.75-1.5A,1BUTTON	SA	1
6	3	W0615	DC65-00008B	CLAMPER HOSE; SSEC-GE,SK5,-,-,-,-,-,ID14.2,	SA	16

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
7	3	W0151	DC67-00051F	HOSE DRAWER; WF8502NHW,EPDM,AEGIS	SNA	1
8	3		DC67-01180A	HOSE CONDENSER; WD5100B,EPDM,ID9,T2.75,-,	SA	1
9	3		DC67-01237A	HOSE CONDENSER; WD9000C,EPDM,ID9,T2.75,-,	SA	1
10	3		DC67-01238A	HOSE DRAWER; WD9000C,EPDM,ID9,T2.75,HS65,	SA	1
11	3		DC67-01242A	HOSE DRAWER; WD9000C,EPDM,ID9,T2.75,HS65,	SA	1
12	3		DC93-00306A	ASSY S.NOZZLE CONNECTOR; WD0804,SCOUT COM	SA	2
12-1	4	M0031	DC62-00182A	NOZZLE CONNECTOR-UP; COMBO,POM,-,NATURAL,	SA	2
12-2	4	M0032	DC62-00183A	NOZZLE CONNECTOR-LOW; COMBO,POM,-,NATURAL	SA	2
13	3	U0211	DC97-18446B	ASSY NOZZLE CONNECTOR; SLIM COMBO,WD80K52	SA	1
14	3	R0091	DC97-22239F	ASSY S.HOUSING DRAWER; U-PJT,WW7000T,PP,2	SA	1
14-1	4		DC61-05189C	HOUSING DRAWER-UP; WW8000T,PP+TD30%,T2,NA	SA	1
14-2	4		DC61-05191C	HOUSING DRAWER-MIDDLE; WW9000B,PP+TD30%,T	SA	1
15	3	J0013	DC97-23140C	ASSY PUMP DRAIN; SU-PJT,WW7100A,DC12V	SA	1

8. ASSY DUCT AIR PARTS

ASSY DUCT AIR PARTS

Exploded View

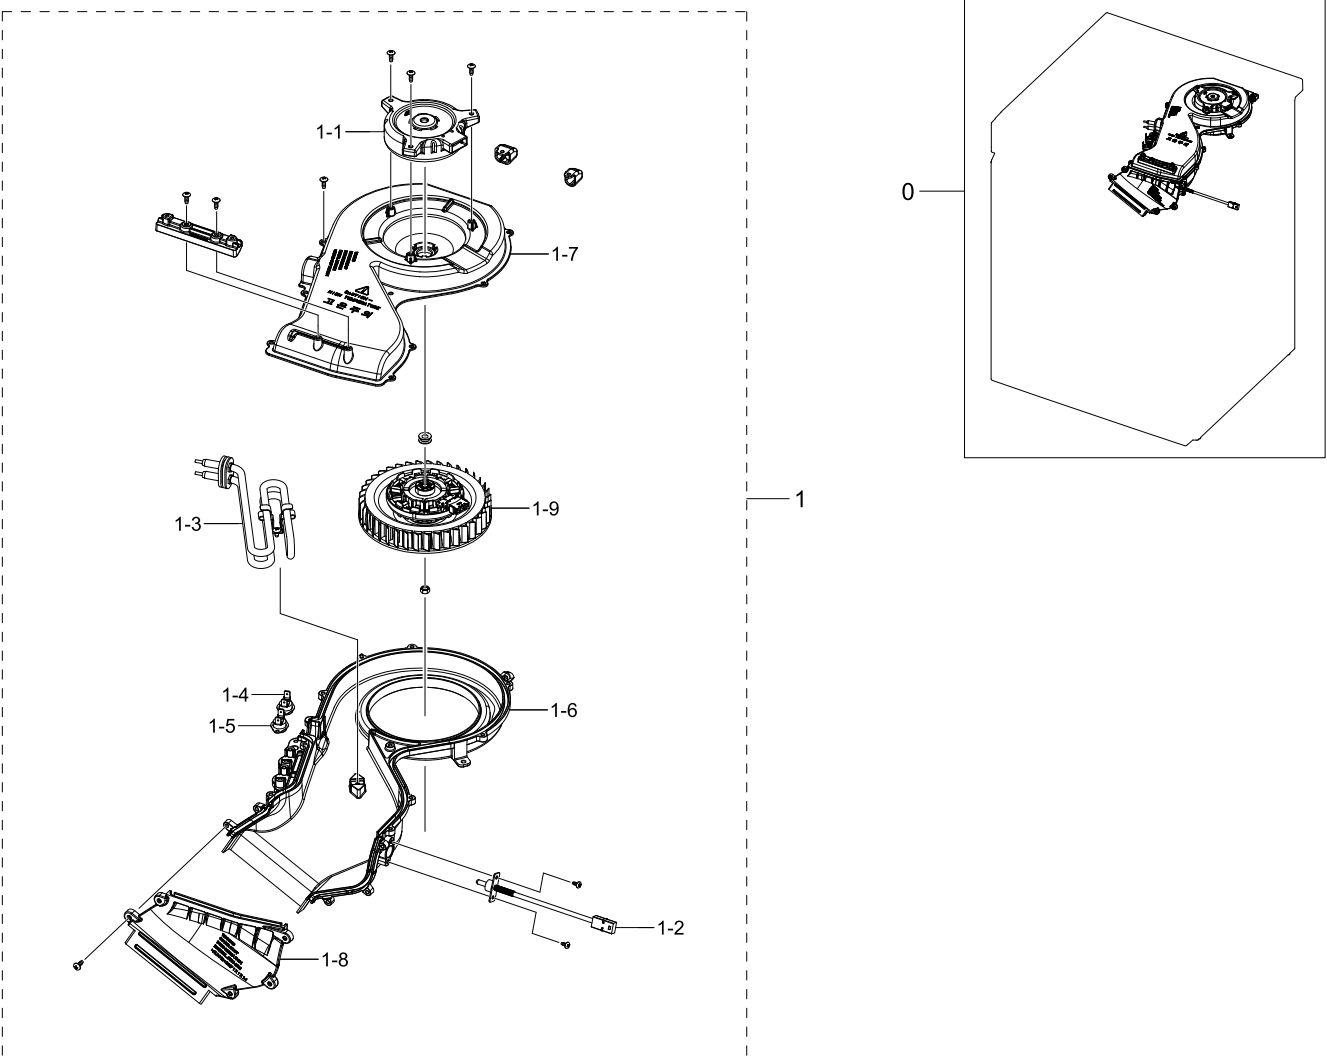

Parts List


No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
0	1		DC90-31519A	ASSY DUCT AIR PARTS; WD8400D,220V	SNA	1
1	2	U0373	DC93-01035A	ASSY DUCT SCROLL; WD5000C	SA	1
1-1	3		DC31-00164A	MOTOR BLDC FAN; DWD00618BRA,2650,24V	SA	1
1-2	3	M0487	DC32-00004C	THERMISTOR;DRYER,-20℃ ~ 170℃,5,5,3.3k+5%	SA	1
1-3	3	W0646	DC47-00008F	HEATER DRY; AC230V,1600W,INCOLOY800,897mm	SA	1
1-4	3	W0758	DC47-00016B	THERMOSTAT; AC125/250V,25A,125C,-35C,S.O.	SA	1

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1-5	3	W0758	DC47-00016C	THERMOSTAT; AC125/250V,16A,125C,-35C,Manu	SA	1
1-6	3		DC61-05865A	HOUSING FAN-LOW; WD5000C,ALDC,T2,NATURAL,	SNA	1
1-7	3		DC61-05866A	HOUSING FAN-UP; WD5000C,ALDC,T2,NATURAL,-	SNA	1
1-8	3		DC67-01062A	DUCT GUIDE; PA66+GF30%,T3,KN332G30V0,BLAC	SNA	1
1-9	3	H0048	DC67-01256A	FAN; PA66+GF30%,T2.5,V-0,KN332G30V0,BLACK	SNA	1

9. SMALL PARTS

SMALL PARTS

Exploded View

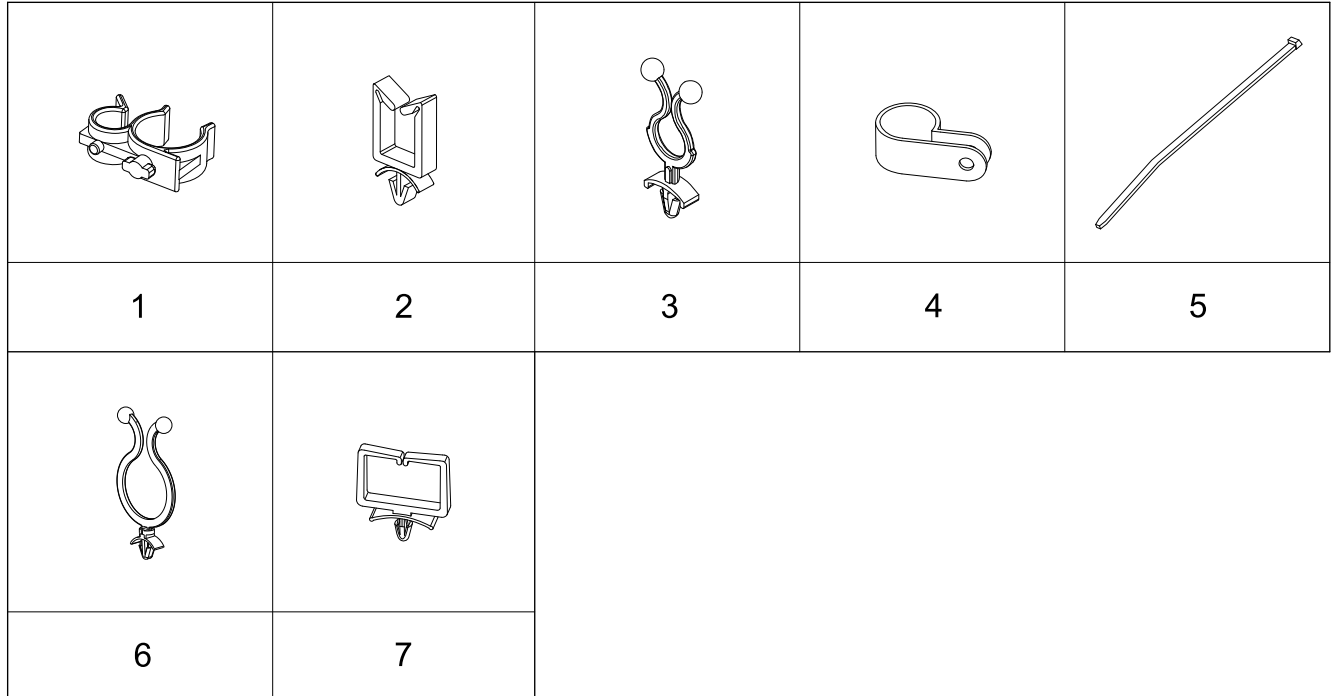

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	W0616	DC61-00133A	CLAMPER HOSE-FIX; P1291,PP,NATURAL,-,-,BJ	SNA	2
2	2	M0001	DC61-00553B	CABLE CLAMP; DAWS-3NE,PA66,NTR	SNA	1
3	2	U0363	6502-000127	CABLE CLAMP; DAWH-18NB,PA66,NTR	SNA	1
4	2	U0363	DC65-20010A	CABLE CLAMP; PA66,NTR,DA-9N-1	SNA	1
5	3	A0354	6501-000121	CABLE TIE; DA-368,NYLON66,NTR,T1.5,W7.6,L	SNA	1
6	4	W0623	DC61-40083A	HOLDER WIRE; DAWH-3ND,PA66,-,NATURAL,-,-,	SNA	1
7	2	M0047	DC61-60074A	HOLDER WIRE; PA66,NATURAL,101F,rectangle	SNA	6