


# 1. MAIN

## MAIN

### Exploded View

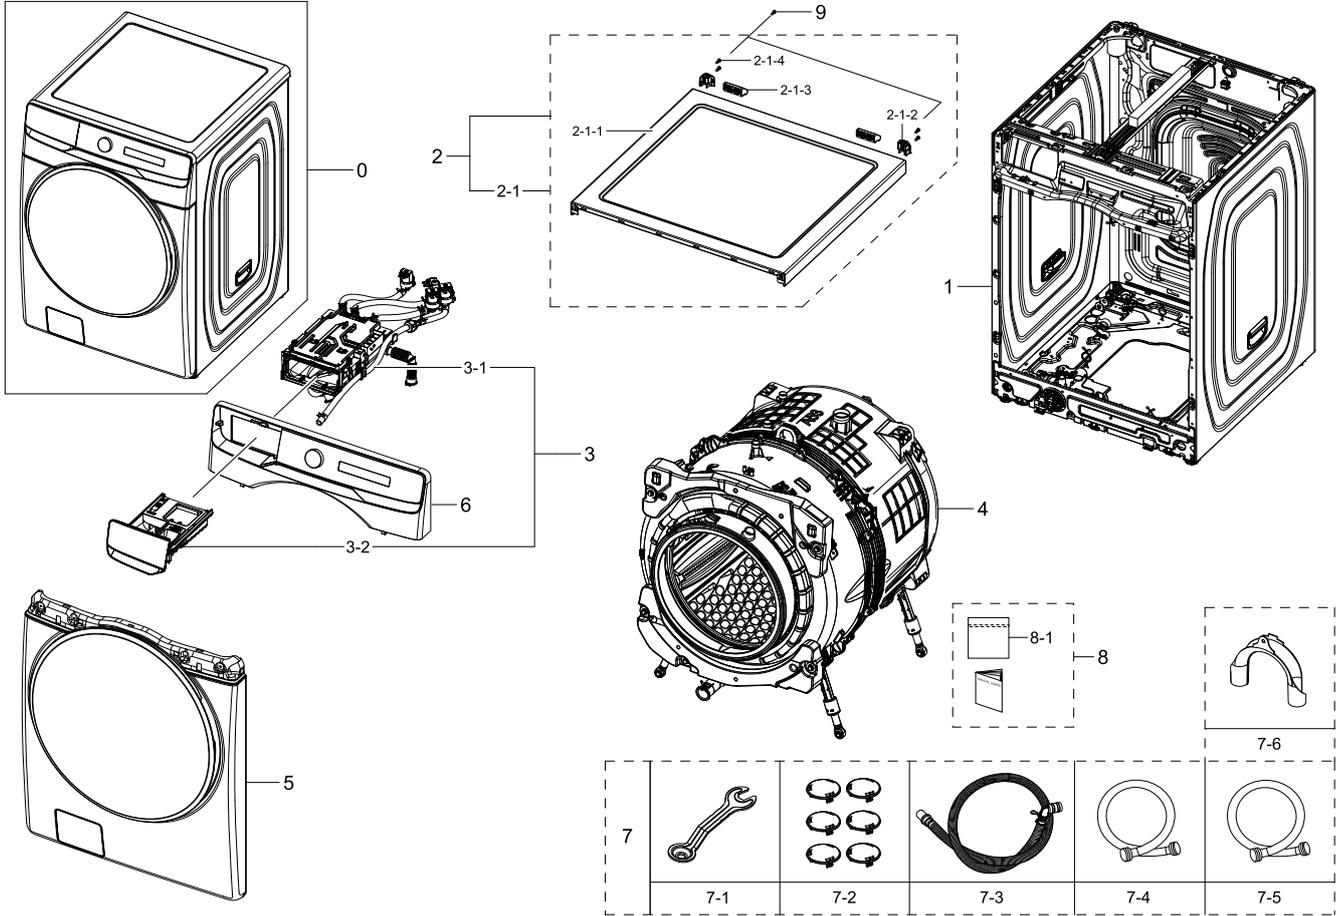

### Parts List

| No.   | Lvl. | Loc.   | Material Code | Description & Specification                    | SNA | Qty. |
|-------|------|--------|---------------|--|-----|------|
| 1     | 1    |        | DC90-30775W   | ASSY FRAME PARTS;<br>WF8000DG,220V/50HZ,HAND   | SNA | 1    |
| 2     | 1    | P0001  | DC97-22016X   | ASSY COVER TOP;<br>WF8000DG,WASHER,BLACK CAV   | SA  | 1    |
| 2-1   | 2    | P0001  | DC97-22704C   | ASSY COVER TOP;<br>WF8000DG,WASHER,BLACK CAV   | SA  | 1    |
| 2-1-1 | 3    |        | DC63-02461E   | COVER TOP;<br>WF8500TK,EGI-SECD,T0.8,-,-,BLA   | SNA | 1    |
| 2-1-2 | 3    |        | DC67-00333A   | CAP COVER TOP;<br>DV448AEP,ABS,T3,-,-,HG-0760G | SA  | 1    |
| 2-1-3 | 3    |        | DC67-00414B   | CAP COVER TOP;<br>WD9/8/7500NK,ABS,HB,HG-076   | SA  | 2    |
| 2-1-4 | 3    | WX0412 | 6002-000213   | SCREW-TAPPING;<br>SWRCH18A,ZPC(WHT),L12,M4,T   | SA  | 8    |


Exploded Views and Parts List

| No. | Lvl. | Loc.   | Material Code | Description & Specification                    | SNA | Qty. |
|-----|------|--------|---------------|--|-----|------|
| 3   | 1    |        | DC90-31797E   | ASSY DRAWER PARTS;<br>WF8000DG,25KG,WASHER,N   | SNA | 1    |
| 3-1 | 2    | R0090  | DC97-24444A   | ASSY HOUSING DRAWER;<br>WF8000DG,WF26DG8250A   | SA  | 1    |
| 3-2 | 2    |        | DC97-22003D   | ASSY DRAWER-MODULE;<br>WD6500TK,NON ASD,FULL   | SA  | 1    |
| 4   | 1    | U0184  | DC90-30861F   | ASSY TUB & DRUM;<br>WF8000DG,25KG,230V,DRUM LI | SNA | 1    |
| 5   | 1    |        | DC90-30034Z   | ASSY FRONT PARTS;<br>WF8000DG,CONTOUR,BLACK    | SNA | 1    |
| 6   | 1    | C0002  | DC97-22504M   | ASSY PANEL CONTROL;<br>WF8000DG,SIMPLE,NON A   | SA  | 1    |
| 7   | 1    | Y0101  | DC98-04039Q   | ASSY ACCESSORY;<br>WF8000DG,EUROPE,A.HOSE,HO   | SNA | 1    |
| 7-1 | 2    | A0034  | DC60-40146A   | BOLT SPANER; -,CR-SPCC,T2.5,L166,-,-,-,-       | SA  | 1    |
| 7-2 | 2    | W0614  | DC67-00307A   | CAP-FIXER;<br>WF438AAC/XAA,PP,T1.5,-,P-002HB   | SA  | 6    |
| 7-3 | 2    | I0022  | DC97-02250F   | ASSY HOSE DRAIN(O);<br>B1415J(NO-SPONGE),TPE   | SA  | 1    |
| 7-4 | 2    | I0040  | DC62-00079A   | ASSY HOSE WATER;<br>P1405J,AQUA-STOP,L1500,G   | SC  | 1    |
| 7-5 | 2    | I0040  | DC97-17845B   | ASSY HOSE WATER; HOT,ALL MODEL                 | SA  | 1    |
| 7-6 | 2    | WH5379 | DC62-10278A   | HOSE HANGER; PUMP<br>MODEL,PP,ID27,T1.5,HS95   | SA  | 1    |
| 8   | 2    | A0241  | DC98-04623P   | ASSY MANUAL;<br>WF8000DG,CONTOUR,WF20DG8650B   | SNA | 1    |
| 8-1 | 3    |        | 6902-003436   | BAG PE;<br>HDPE,T0.015,W200,L350,TRP,RECYCLE   | SA  | 1    |
| 9   | 2    | Z0062  | 6002-001431   | SCREW-TAPPING;<br>SWRCH18A,ZPC(WHT),L16,M5,H   | SA  | 2    |

## 2. ASSY FRAME PARTS

### ASSY FRAME PARTS

#### Exploded View

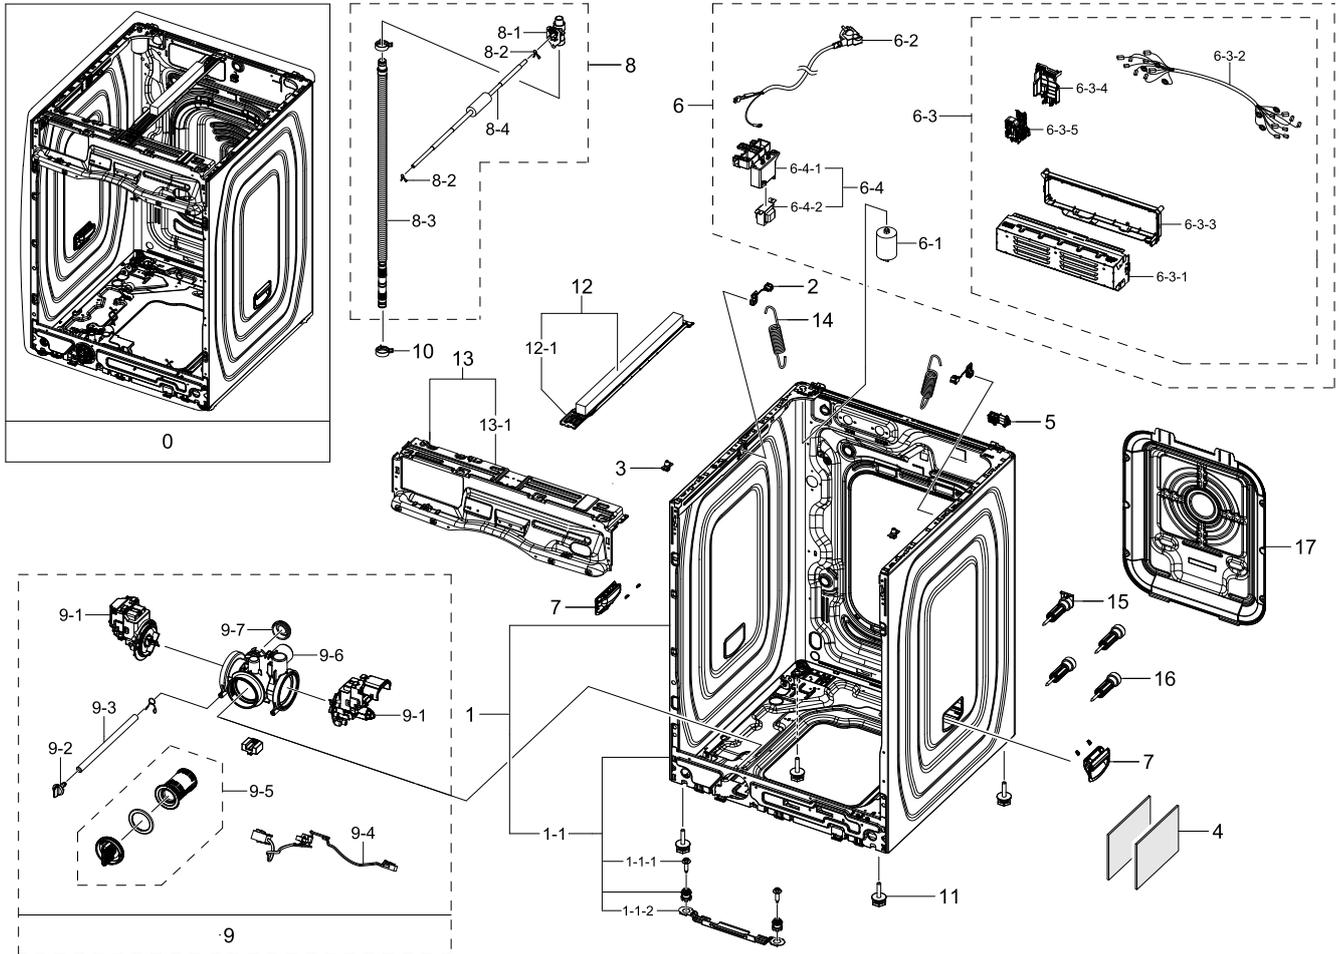

#### Parts List

| No.   | Lvl. | Loc.  | Material Code | Description & Specification                  | SNA | Qty. |
|-------|------|-------|---------------|--|-----|------|
| 1     | 2    | F0028 | DC97-23181W   | ASSY FRAME;<br>WF8000DG,WASHER,25KG,BLACK CA | SA  | 1    |
| 1-1   | 3    | X0010 | DC97-23255E   | ASSY PLATE BOTTOM;<br>WF8000DG,T1.2,FRAME CO | SNA | 1    |
| 1-1-1 | 4    | U0320 | 6011-001565   | BOLT-HEX;<br>M6,L35.1,ZPC(WHT),HWH,+,SWRCH25 | SA  | 2    |
| 1-1-2 | 4    | J0017 | DC61-02388A   | BRACKET PUMP;<br>WR-PA179UR,GI-SGCC,T1.2,MOU | SA  | 1    |
| 2     | 2    | A0352 | DC61-02432A   | GUIDE SPRING;<br>WF419AAW,POM,T2,-,F20-03,NA | SA  | 2    |
| 3     | 2    |       | DC61-03400A   | GUIDE COVER TOP;<br>HUDSON,POM,-,-,500P,BLAC | SA  | 2    |

Exploded Views and Parts List


| No.   | Lvl. | Loc.   | Material Code | Description & Specification                    | SNA | Qty. |
|-------|------|--------|---------------|--|-----|------|
| 4     | 2    |        | DC63-00108B   | ABSORBER SPONGE; WF6000R,PU<br>FOAM,T15,L175   | SA  | 2    |
| 5     | 2    |        | DC63-02181A   | COVER CONNECTOR; WW5500K<br>(SEHC),PP,-,HB,N   | SA  | 1    |
| 6     | 1    |        | DC90-30669U   | ASSY ELECTRICAL PARTS;<br>WF8000DG,25KG,SIMP   | SNA | 1    |
| 6-1   | 2    |        | DC29-00015K   | FILTER EMI;<br>6.5mH,53X95.5X53mm,15A,V(14D6   | SA  | 1    |
| 6-2   | 2    | W0467  | DC96-00146A   | POWER CORD-AT; H05VV-F<br>3x1.5mm2,GRY,EU3F,   | SC  | 1    |
| 6-3   | 2    |        | DC92-02845H   | ASSY COVER PCB W/HARNESS;<br>WF8000D,NON ASD   | SNA | 1    |
| 6-3-1 | 3    |        | DC63-03163A   | COVER PCB; GI-SGCC,T0.4,-,-,-,-,-              | SNA | 1    |
| 6-3-2 | 3    |        | DC93-01085B   | ASSY WIRE HARNESS-MAIN;<br>DRUM-L,NO T/A,O,2   | SA  | 1    |
| 6-3-3 | 3    |        | DC94-15638A   | ASSY PCB EEPROM;<br>0076,WF8000DG,F7+0076      | SA  | 1    |
| 6-3-4 | 3    |        | DC63-02495A   | COVER DOOR SWITCH;<br>WF8000R,TPE,T1,-,DARK    | SA  | 1    |
| 6-3-5 | 3    |        | DC34-00028B   | SWITCH DOOR LOCK;<br>AC250V,16A,SOLENOID,DOO   | SA  | 1    |
| 6-4   | 2    | R0121  | DC93-00279B   | ASSY TRANS REACTORV;<br>ARNO,110V/60Hz         | SA  | 1    |
| 6-4-1 | 3    |        | DC61-03107A   | BRACKET REACTOR;<br>ARNO,PP,T3,NATURAL         | SA  | 1    |
| 6-4-2 | 3    |        | DC26-00009R   | COIL HARMONIC;<br>2.5mH,53x80x45mm,6A,EI48*2   | SA  | 1    |
| 7     | 2    | A0085  | DC97-15854J   | ASSY HANDLE; WD8000DK,DARK GRAY                | SA  | 2    |
| 8     | 2    | I0066  | DC97-17996V   | ASSY HOSE DRAIN(I);<br>WF8000B,SIPHON-TUB,HO   | SA  | 1    |
| 8-1   | 3    |        | DC61-03918A   | GUIDE HOSE DRAIN;<br>WD22H9600KG/AX,PP+TD30%   | SA  | 1    |
| 8-2   | 3    | WP0165 | DC61-70029C   | CLIP RING;<br>SEW-HW125,HSWR,-,-,-,ID8.3,W     | SNA | 2    |
| 8-3   | 3    |        | DC67-00330V   | HOSE PUMP;<br>WF9600BK,PP+TD30%,-,-,DARK H     | SA  | 1    |
| 8-4   | 3    | I0003  | DC67-00796A   | HOSE WATER; ALL<br>MODEL,EPDM,ID5,T2,HS65,BL   | SA  | 1    |
| 9     | 2    | J0013  | DC97-20620M   | ASSY PUMP DRAIN;<br>WD6500TK,220V/50HZ,2POIN   | SNA | 1    |
| 9-1   | 3    |        | DC31-00181A   | MOTOR AC PUMP; DRUM &<br>AUTO,B15-6A/S3019/S30 | SA  | 2    |
| 9-2   | 3    | I0071  | DC61-10673A   | CAP DRAIN;<br>WF220ANW,PP,-,HB,CNTK-P101,INN   | SA  | 1    |
| 9-3   | 3    | U2015  | DC67-00244K   | HOSE DRAIN; HEBA,EPDM                          | SA  | 1    |

| No.  | Lvl. | Loc.  | Material Code | Description & Specification                  | SNA | Qty. |
|------|------|-------|---------------|--|-----|------|
| 9-4  | 3    | W0122 | DC93-00693C   | ASSY WIRE HARNESS-PUMP;<br>DRUM-L,WD9500NK,D | SA  | 1    |
| 9-5  | 3    | U0310 | DC97-23184B   | ASSY FILTER;<br>WF9600,WF25B9600KE,GREASE    | SA  | 1    |
| 9-6  | 3    | J0019 | DC61-02017G   | CASE-PUMP;<br>WF448AAG,PP+TD20%,NATURAL,HT42 | SA  | 1    |
| 9-7  | 3    | F0223 | DC62-00299A   | VALVE CHECK;<br>BIGBANG,NBR,ID28.6/OD33,HS70 | SA  | 1    |
| 10   | 2    | N0010 | DC61-01679A   | CLAMPER HOSE;<br>SEW-HFR177AR,SK5,NATURAL,-, | SA  | 1    |
| 11   | 2    | B0070 | DC97-23484A   | ASSY LEG; 25kg<br>FLAT,WF8900BK,H65.0,P1.5   | SA  | 4    |
| 12   | 2    | U0150 | DC97-21925A   | ASSY GUIDE WIRE; WF6000R,SEHC                | SA  | 1    |
| 12-1 | 3    |       | DC61-04867B   | GUIDE WIRE; A-PJT,GI-SGCC,T0.8,SEHC          | SA  | 1    |
| 13   | 2    |       | DC97-22012A   | ASSY FRAME PLATE-UP; WF6500TK                | SA  | 1    |
| 13-1 | 3    |       | DC61-04766A   | FRAME PLATE-UP;<br>WF6500P,GI-SGCC,T1,A1-PJT | SA  | 1    |
| 14   | 2    | A0353 | DC61-01257N   | SPRING ETC-HANGER MODULE;<br>GRACE-S PJT,SWP | SA  | 2    |
| 15   | 2    | U0111 | DC98-04012A   | ASSY FIXER TUB; WF8/6000R,LINK<br>CONNECTOR  | SA  | 1    |
| 16   | 2    | U0111 | DC98-04012H   | ASSY FIXER TUB; WF8/6000R,LINK<br>CONNECTOR, | SA  | 3    |
| 17   | 2    |       | DC63-02868A   | COVER BACK;<br>WF8900B,GI-SGCC,T0.35,-,-,-,- | SA  | 1    |

# 3. ASSY TUB & DRUM PARTS

## ASSY TUB & DRUM PARTS

### Exploded View

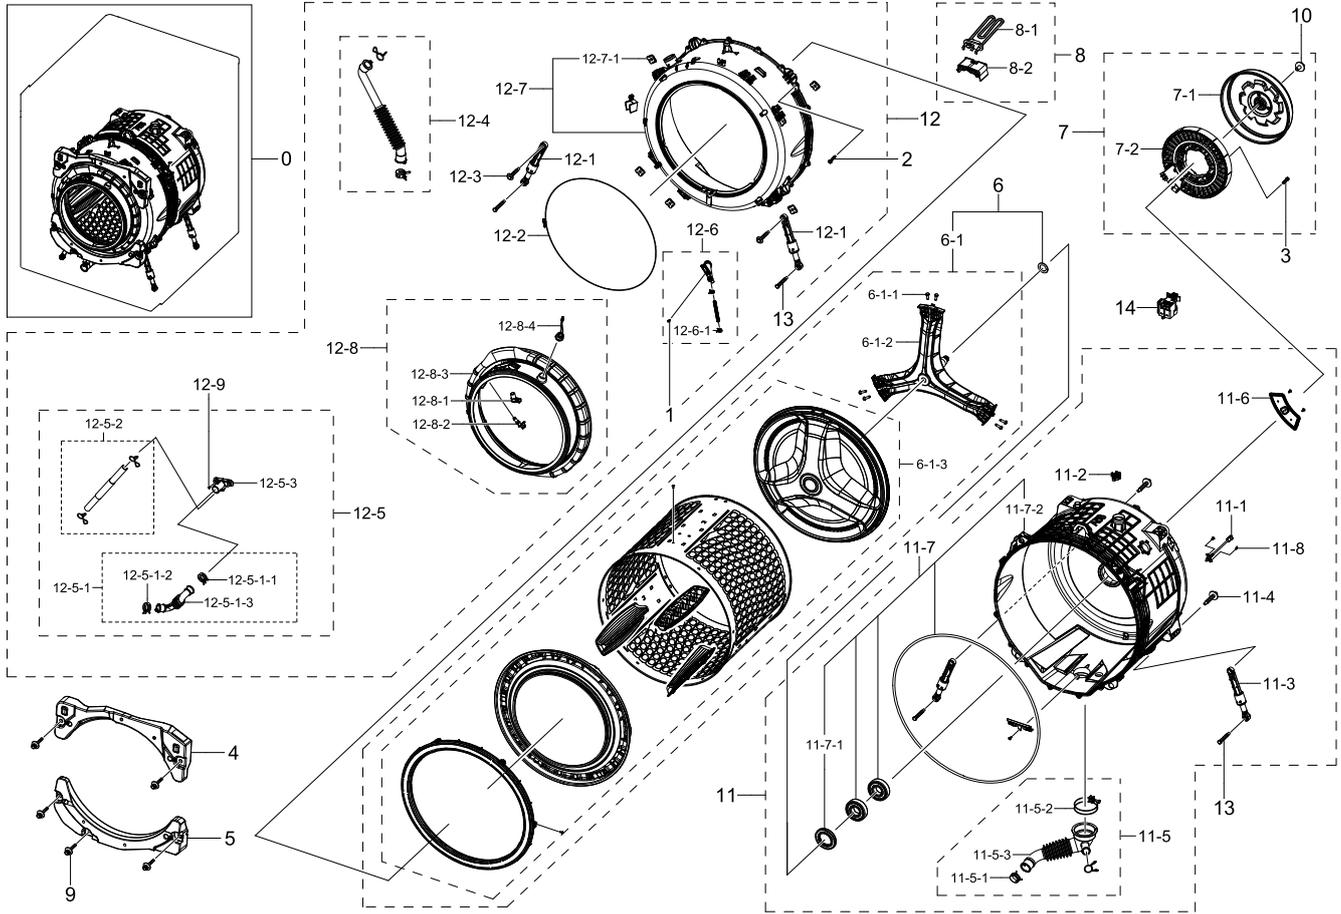

### Parts List

| No. | Lvl. | Loc.  | Material Code | Description & Specification                    | SNA | Qty. |
|-----|------|-------|---------------|--|-----|------|
| 0   | 1    | U0184 | DC90-30861F   | ASSY TUB & DRUM;<br>WF8000DG,25KG,230V,DRUM LI | SNA | 1    |
| 1   | 2    | Z0062 | 6002-001306   | SCREW-TAPPING;<br>SWRCH18A,ZPC(WHT),L14,M4,T   | SNA | 1    |
| 2   | 2    | G0049 | 6009-001367   | BOLT-HEX;<br>M6.5,L32,ZPC(WHT),HWH,+,SWRCH18   | SNA | 16   |
| 3   | 2    | U0097 | 6011-004782   | BOLT-ETC;<br>M6,L60,Zn-Ni(SIL),HWH,+,SCM435    | SA  | 3    |
| 4   | 2    |       | DC67-01187A   | WEIGHT BALANCER-UP MODULE;<br>WF8900B,CONCRE   | SA  | 1    |
| 5   | 2    |       | DC67-01188B   | WEIGHT BALANCER-MODULE;<br>WF9000CK,CONCRETE   | SA  | 1    |
| 6   | 2    |       | DC90-30859C   | ASSY DRUM PARTS;<br>WF8000DG,25KG,NO W/B (BA   | SNA | 1    |

| No.    | Lvl. | Loc.   | Material Code | Description & Specification                  | SNA | Qty. |
|--------|------|--------|---------------|--|-----|------|
| 6-1    | 3    |        | DC97-23863B   | ASSY DRUM-MODULE; LAUNDRY HUB,5.3CUFT        | SA  | 1    |
| 6-1-1  | 4    | WJ5081 | DC60-40137A   | BOLT HEX;<br>MARS-PJT,STS430,-,L30,-,-,-,HEX | SA  | 6    |
| 6-1-2  | 4    | R0001  | DC97-21488A   | ASSY FLANGE SHAFT; WF8/6000R                 | SA  | 1    |
| 6-1-3  | 4    | R0011  | DC97-23864A   | ASSY DRUM WRAPPER;<br>WF8000CK,25KG,-        | SA  | 1    |
| 7      | 2    | H0097  | DC93-00236F   | ASSY DD BLDC MOTOR-MODULE;<br>WF8000R,COM200 | SNA | 1    |
| 7-1    | 3    |        | DC97-20193B   | ASSY ROTOR; COM2000A,60.1                    | SA  | 1    |
| 7-2    | 3    |        | DC97-21487B   | ASSY STATOR; COM2000A,H35                    | SA  | 1    |
| 8      | 2    | W0005  | DC96-01417H   | ASSY HEATER;<br>WD0150VDX/XSG,NORMAL HEATER  | SNA | 1    |
| 8-1    | 3    |        | DC47-00006V   | HEATER WASH;<br>AC230V,2000W,SUS316L,560mm,N | SA  | 1    |
| 8-2    | 3    | U0363  | DC63-00820A   | COVER HEATER;<br>WF337AAW,PC+ABS,NATURAL,NH- | SA  | 1    |
| 9      | 2    | U0051  | DC97-02412A   | ASSY BOLT; MOTOR/ M8*L62,,,,,,               | SA  | 5    |
| 10     | 2    | U0051  | DC97-06080F   | ASSY BOLT; WD9500J,30,M12, Washer 38         | SA  | 1    |
| 11     | 2    | U0013  | DC97-23870C   | ASSY TUB BACK; WF8000DG(25kg)                | SNA | 1    |
| 11-1   | 3    | M0487  | DC32-00010C   | SENSOR TEMP;<br>L120,3.243kohm,2%,60C,9.8phi | SA  | 1    |
| 11-2   | 3    |        | DC32-00018B   | SENSOR PHOTO; RCM,5V                         | SA  | 1    |
| 11-3   | 3    | U0133  | DC66-00650A   | DAMPER-SHOCK;<br>BIG-BANG,PP/RUBBER/STS,-,BL | SA  | 4    |
| 11-4   | 3    | W0601  | DC97-14263A   | ASSY BOLT;<br>MOTOR/BOLT(M8)+WASHER(OD27.5), | SA  | 4    |
| 11-5   | 3    | I0039  | DC97-16105B   | ASSY HOSE DRAIN;<br>WF6200,WF6500,WF7500     | SA  | 1    |
| 11-5-1 | 4    | N0010  | DC61-00219D   | CLAMPER HOSE;<br>SW-50A1S,SK5,-,-,-,ID33,T   | SA  | 1    |
| 11-5-2 | 4    | B0010  | DC65-00014E   | CLAMPER HOSE-JOINT;<br>WF6000H,HSWR,-,-,-,-, | SA  | 1    |
| 11-5-3 | 4    |        | DC67-00465A   | HOSE FILTER TUB;<br>WF520,EPDM,ID73,T2,HS50, | SNA | 1    |
| 11-6   | 3    |        | DC61-04878A   | BRACKET TUB;<br>WF45P6000,GI-SGCC,T0.35,-,-, | SNA | 1    |
| 11-7   | 3    | U0001  | DC97-23872B   | ASSY S.TUB BACK; LAUNDRY HUB,5.3CUFT         | SA  | 1    |
| 11-7-1 | 4    |        | DC62-00156A   | SEAL OIL; TS85-PJT,NBR,-,-,-,BLACK,-,-       | SA  | 1    |
| 11-7-2 | 4    | U0092  | DC97-23874B   | ASSY SEMI TUB BACK; LAUNDRY HUB,5.3CUFT      | SA  | 1    |
| 11-8   | 2    | WX0412 | 6002-000213   | SCREW-TAPPING;<br>SWRCH18A,ZPC(WHT),L12,M4,T | SA  | 10   |
| 12     | 2    | U0026  | DC97-23876D   | ASSY TUB FRONT; WF8000/6000DG                | SNA | 1    |

Exploded Views and Parts List

| No.      | Lvl. | Loc.   | Material Code | Description & Specification                  | SNA | Qty. |
|----------|------|--------|---------------|--|-----|------|
| 12-1     | 3    | U0133  | DC66-00650A   | DAMPER-SHOCK;<br>BIG-BANG,PP/RUBBER/STS,-,BL | SA  | 4    |
| 12-2     | 3    |        | DC97-04981F   | ASSY CLAMP DIAPHRAGM;<br>PURPLE,WF448AAW,-,- | SA  | 1    |
| 12-3     | 3    | W0601  | DC97-14263A   | ASSY BOLT;<br>MOTOR/BOLT(M8)+WASHER(OD27.5), | SA  | 4    |
| 12-4     | 3    | I0020  | DC97-16106D   | ASSY HOSE AIR; DRUM 27",SEHC VE              | SA  | 1    |
| 12-5     | 3    | I0071  | DC97-18937N   | ASSY HOSE CONNECTOR;<br>WF8000AK,FLAT 24KG,N | SA  | 1    |
| 12-5-1   | 4    | I0011  | DC97-22734A   | ASSY HOSE; Grande 2.0<br>AI,WF8000R,HOSE AIR | SA  | 1    |
| 12-5-1-1 | 5    | N0010  | DC61-00219F   | CLAMPER HOSE;<br>SEW-HAR149AUA,SK5,-,-,-,I   | SA  | 1    |
| 12-5-1-2 | 5    | N0010  | DC61-00219H   | CLAMPER HOSE;<br>GRACE,SK5,ID27/OD28.6/H13/T | SA  | 1    |
| 12-5-1-3 | 5    |        | DC67-01134A   | HOSE AIR TUB;<br>WF8000R,EPDM,ID24.5,T2,HS50 | SA  | 1    |
| 12-5-2   | 4    | I0011  | DC97-22735A   | ASSY HOSE; Grande 2.0<br>AI,WF8000R,HOSE WAT | SA  | 1    |
| 12-5-3   | 4    |        | DC67-00760A   | HOSE CONNECTOR;<br>WF56H9100AG,PP+GLF15%,NAT | SA  | 1    |
| 12-6     | 3    | I0070  | DC97-21474B   | ASSY HOSE PRESSURE; 400mmH20,No<br>PBA,WF650 | SA  | 1    |
| 12-6-1   | 4    | N0010  | DC65-00008C   | CLAMPER HOSE; DRUM<br>W/M,SK5,-,-,-,T0.7     | SA  | 2    |
| 12-7     | 3    | P0009  | DC97-21945E   | ASSY SEMI TUB FRONT; WF8000CK                | SA  | 1    |
| 12-7-1   | 4    | U0023  | DC61-00201A   | BRACKET NUT;<br>P1291,PO-SPHC,T3,NO-PAINT/MO | SA  | 5    |
| 12-8     | 3    | U0021  | DC97-21986D   | ASSY DIAPHRAGM;<br>WF9500AK,FLAT,LAMP        | SA  | 1    |
| 12-8-1   | 4    |        | DC62-00728A   | NOZZLE DIAPHRAGM;<br>WF6000TK,PP+TD30%,-,EUR | SA  | 1    |
| 12-8-2   | 4    |        | DC62-00781B   | NOZZLE DIAPHRAGM;<br>WF8000R,PP+TD30%,-,EURO | SNA | 1    |
| 12-8-3   | 4    |        | DC64-03918A   | DOOR DIAPHRAGM;<br>WF6500TK,TPE,T2,-,ER7735D | SA  | 1    |
| 12-8-4   | 4    |        | DC96-01710A   | ASSY LAMP LED; FR-4,WHITE,AMP<br>5-179463-1, | SA  | 1    |
| 12-9     | 3    | WX0412 | 6002-000213   | SCREW-TAPPING;<br>SWRCH18A,ZPC(WHT),L12,M4,T | SA  | 8    |
| 13       | 2    | U0320  | 6011-001644   | BOLT-HEX;<br>M10,L35,ZPC(WHT),HH,+,SM10C,DAM | SNA | 4    |
| 14       | 2    | H2050  | DC96-01703G   | SENSOR PRESSURE;<br>Air,5V,L0,400mmH2O       | SA  | 1    |




Exploded Views and Parts List

| No.     | Lvl. | Loc.   | Material Code | Description & Specification                  | SNA | Qty. |
|---------|------|--------|---------------|--|-----|------|
| 4-3-1   | 4    | Z0063  | 6001-001668   | SCREW-MACHINE;<br>STS430,PASS,L16,M5,TH,+,FP | SA  | 3    |
| 4-3-2   | 4    | WD0090 | DC61-00891A   | GUIDE HINGE;<br>HAUZEN(DOM),POM,-,-,K300,NAT | SA  | 4    |
| 4-3-3   | 4    |        | DC61-02635A   | SUPPORT HINGE;<br>GI-SGCC,T1.4,L175.0,SBHG1- | SA  | 1    |
| 4-3-4   | 4    |        | DC61-04342A   | HINGE DOOR;<br>WV7500M,ALDC,T2.5,-,-,-,ALD   | SA  | 1    |
| 4-3-5   | 4    |        | DC63-01577D   | CUSHION LID;<br>WA8700K,Si,-,D9.1,-,DARK HOL | SA  | 4    |
| 4-4     | 3    | D0101  | DC97-21592C   | ASSY COVER DOOR;<br>WF6000R,TINT,MBS         | SA  | 1    |
| 4-4-1   | 4    |        | DC64-03816B   | DOOR SAFETY;<br>WF6000R,MBS,T2.5,-,ZYLAR-261 | SA  | 1    |
| 5       | 2    | F0064  | DC97-23714Y   | ASSY FRAME FRONT;<br>WF8000DG,CONTOUR,BLACK  | SA  | 1    |
| 5-1     | 3    | F0064  | DC97-22492M   | ASSY FRAME FRONT;<br>WF8000DG,CONTOUR,BLACK  | SA  | 1    |
| 5-1-1   | 4    |        | DC61-02615A   | BRACKET HINGE;<br>WF520ANP,GI-SGCC,T1.4,-,-, | SA  | 1    |
| 5-1-2   | 4    |        | DC61-04840H   | FRAME FRONT;<br>WF45R6300A*,EGI-SECD,BLACK C | SA  | 1    |
| 5-1-3   | 4    | W0059  | DC63-10002D   | ABSORBER SPONGE; DV8500NK,PU<br>FOAM,T10,BLA | SA  | 1    |
| 5-1-4   | 4    | U0361  | DC97-21477C   | ASSY CASE FILTER; WF8/6000R,INNER<br>GRAY,PP | SA  | 1    |
| 5-1-4-1 | 5    |        | DC61-04884D   | GUIDE FILTER;<br>WF6/8000R,PP,T2.5,-,CNTK-P1 | SA  | 1    |

## 5. ASSY PANEL CONTROL PARTS

### ASSY PANEL CONTROL PARTS

#### Exploded View

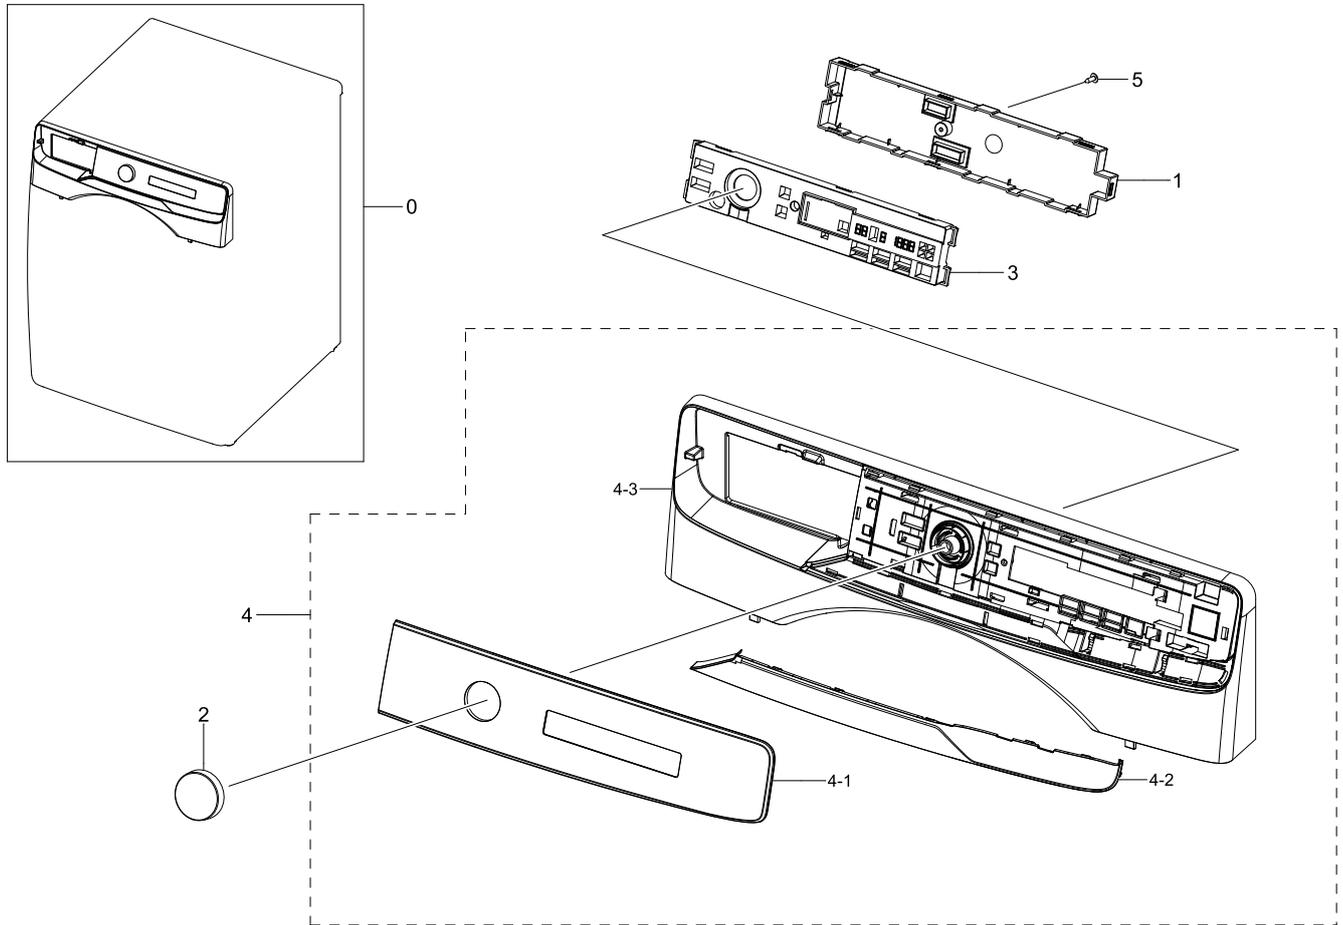

#### Parts List

| No. | Lvl. | Loc.  | Material Code | Description & Specification                  | SNA | Qty. |
|-----|------|-------|---------------|--|-----|------|
| 0   | 1    | C0002 | DC97-22504M   | ASSY PANEL CONTROL;<br>WF8000DG,SIMPLE,NON A | SA  | 1    |
| 1   | 2    |       | DC63-02508A   | COVER PBA-SUB;<br>WV9900R,ABS,T2,HB,NEAT WHI | SA  | 1    |
| 2   | 2    |       | DC64-03921A   | KNOB ENCODER; A1<br>SIMPLE,ABS,-,HB,NATURAL, | SA  | 1    |
| 3   | 2    |       | DC92-03819A   | ASSY PCB DISPLAY;<br>HW,FWM_WASH,WF8000D,8KE | SA  | 1    |
| 4   | 2    | C0002 | DC97-24458C   | ASSY PANEL CONTROL;<br>WF8000DG,SIMPLE,NON A | SA  | 1    |
| 4-1 | 3    | R0049 | DC97-21976J   | ASSY WINDOW PANEL;<br>WD6500TK,COMBO,IMD,BLA | SA  | 1    |
| 4-2 | 3    |       | DC64-03814A   | DECORATION PANEL;<br>WF6000P,ABS,T2.5,BLACK  | SNA | 1    |

Exploded Views and Parts List


---

| No. | Lvl. | Loc.   | Material Code | Description & Specification                  | SNA | Qty. |
|-----|------|--------|---------------|--|-----|------|
| 4-3 | 3    |        | DC64-03923F   | PANEL CONTROL;<br>WF8000DG,SIMPLE,ABS,-,HB,S | SNA | 1    |
| 5   | 2    | WX0412 | 6002-000213   | SCREW-TAPPING;<br>SWRCH18A,ZPC(WHT),L12,M4,T | SA  | 10   |

## 6. ASSY DRAWER PARTS

### ASSY DRAWER PARTS

#### Exploded View

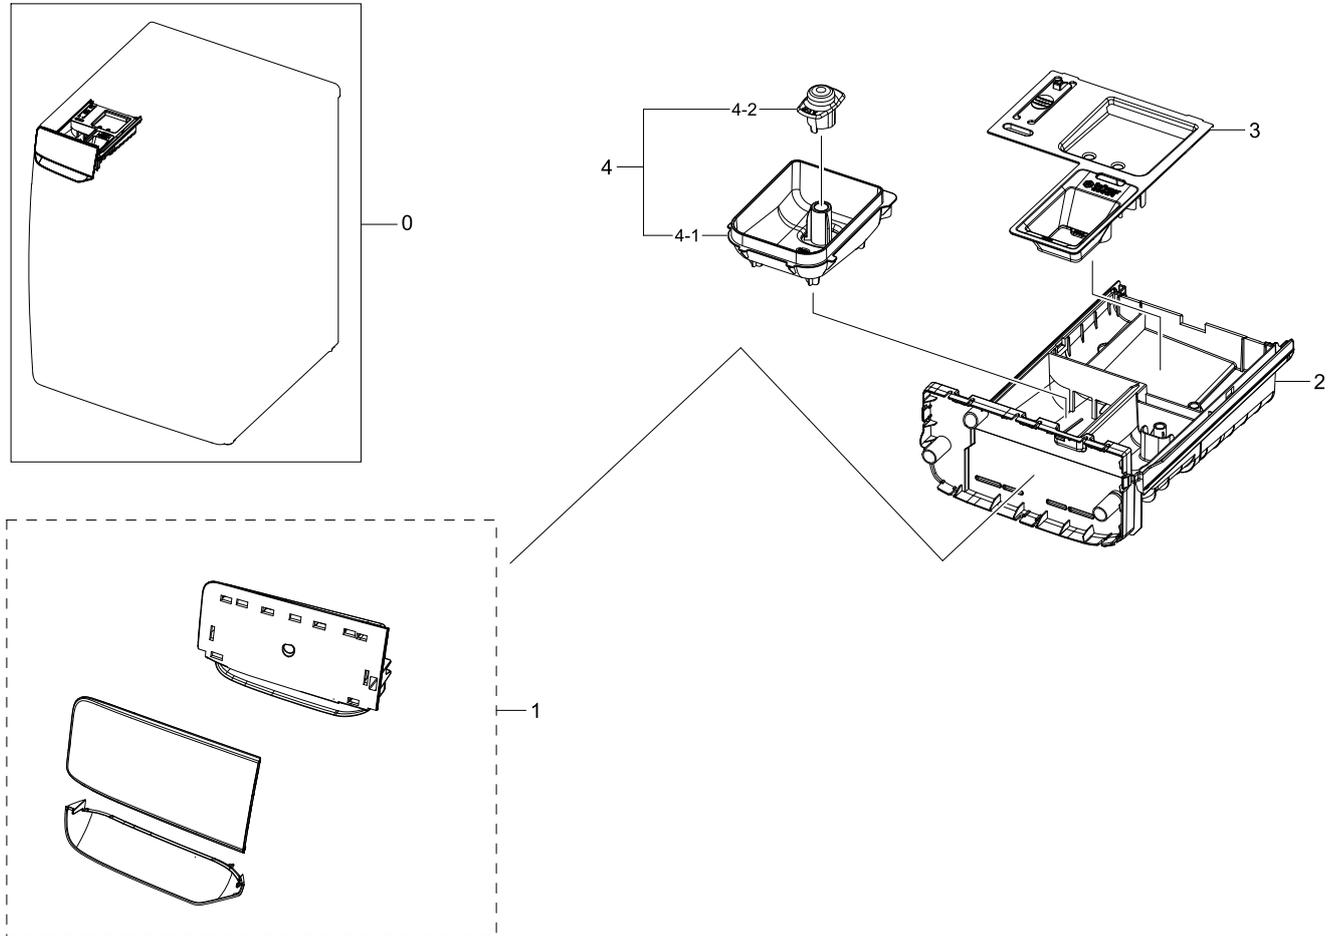


#### Parts List

| No. | Lvl. | Loc.  | Material Code | Description & Specification                      | SNA | Qty. |
|-----|------|-------|---------------|--|-----|------|
| 0   | 2    |       | DC97-22003D   | ASSY DRAWER-MODULE;<br>WD6500TK, NON ASD, FULL   | SA  | 1    |
| 1   | 3    | R0025 | DC97-22004A   | ASSY PANEL DRAWER;<br>WF8/6500TK, BLACK CAVIA    | SA  | 1    |
| 2   | 3    |       | DC61-04862B   | BODY DRAWER;<br>WF6/8000R, PP+TD30%, -, NEAT WH  | SA  | 1    |
| 3   | 3    |       | DC61-05115A   | CASE BLEACH;<br>WF8000R, PP+TD30%, T1.5, HONEST  | SA  | 1    |
| 4   | 3    | P0011 | DC97-21434A   | ASSY DETERGENT; A1 PJT, WF6000R                  | SNA | 1    |
| 4-1 | 4    |       | DC61-04863A   | GUIDE DETERGENT;<br>WF6000R, PP+TD30%, T1.8, -   | SA  | 1    |
| 4-2 | 4    |       | DC67-01060A   | CAP DRAWER;<br>WF6000R, PP+TD30%, T2, MT43, HONE | SA  | 1    |

# 7. ASSY HOUSING DRAWER PARTS

## ASSY HOUSING DRAWER PARTS

### Exploded View

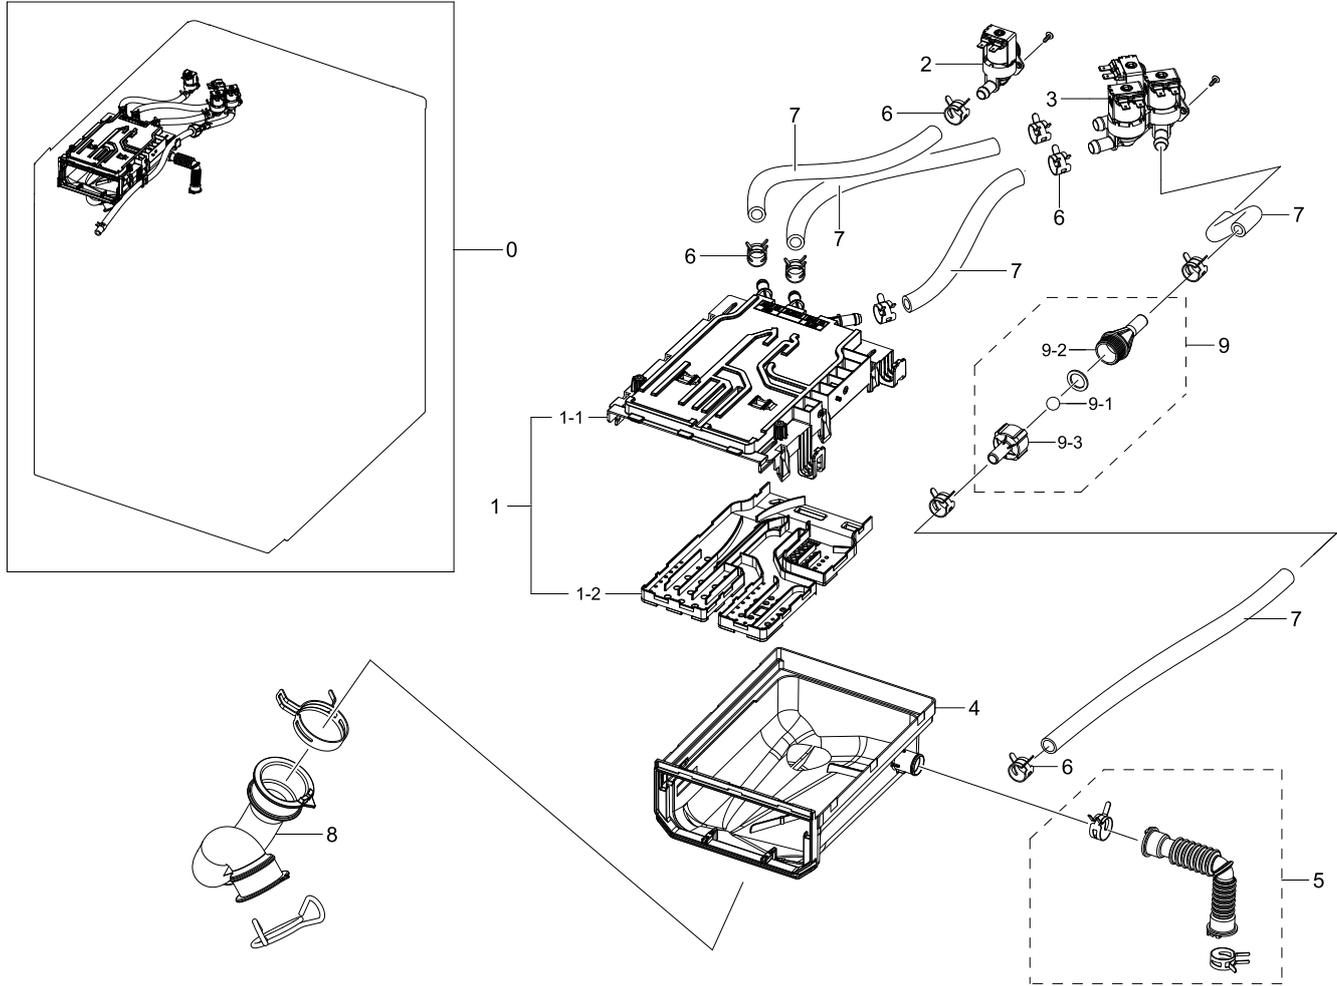

### Parts List




| No. | Lvl. | Loc.  | Material Code | Description & Specification                  | SNA | Qty. |
|-----|------|-------|---------------|--|-----|------|
| 0   | 2    | R0090 | DC97-24444A   | ASSY HOUSING DRAWER;<br>WF8000DG,WF26DG8250A | SA  | 1    |
| 1   | 3    | R0091 | DC97-21479B   | ASSY S.HOUSING DRAWER;<br>WF8/6500TK,NON ASD | SA  | 1    |
| 1-1 | 4    |       | DC61-04860B   | HOUSING DRAWER-UP;<br>WF8000R,PP+TD30%,T1.8, | SNA | 1    |
| 1-2 | 4    |       | DC61-04861A   | HOUSING DRAWER-MIDDLE;<br>WF6000P,PP+TD30%,T | SNA | 1    |
| 2   | 3    | W0032 | DC33-01011A   | VALVE WATER; DC12V,PA66,<br>ORG,mm,#250,1,1, | SA  | 1    |
| 3   | 3    | W0032 | DC62-00233J   | VALVE WATER;<br>DC12V,BRACKET,mm,#250,1,3,11 | SA  | 1    |

| No. | Lvl. | Loc.  | Material Code | Description & Specification                  | SNA | Qty. |
|-----|------|-------|---------------|--|-----|------|
| 4   | 3    |       | DC61-05084A   | HOUSING DRAWER-LOW;<br>WF8000R,PP+TD30%,T1.8 | SA  | 1    |
| 5   | 3    | I0020 | DC97-21462A   | ASSY HOSE AIR; WF8/6000R,A1                  | SA  | 1    |
| 6   | 3    | W0615 | DC65-00008B   | CLAMPER HOSE;<br>SSEC-GE,SK5,-,-,-,ID14.2,   | SA  | 10   |
| 7   | 3    | W0151 | DC67-00051F   | HOSE DRAWER;<br>WF8502NHW,EPDM,AEGIS         | SNA | 2    |
| 8   | 3    |       | DC67-01136A   | HOSE DRAWER TUB;<br>WF8000R,EPDM,ID48.5,T2,H | SA  | 1    |
| 9   | 3    |       | DC93-00306A   | ASSY S.NOZZLE CONNECTOR;<br>WD0804,SCOUT COM | SA  | 1    |
| 9-1 | 4    | R0103 | DC62-00167A   | NOZZLE BALL; Q1636GW,Si,-,-,-,-,TS-2         | SNA | 1    |
| 9-2 | 4    | M0031 | DC62-00182A   | NOZZLE CONNECTOR-UP;<br>COMBO,POM,-,NATURAL, | SA  | 1    |
| 9-3 | 4    | M0032 | DC62-00183A   | NOZZLE CONNECTOR-LOW;<br>COMBO,POM,-,NATURAL | SA  | 1    |

# 8. SMALL PARTS

## SMALL PARTS

### Exploded View

|   |   |   |   |   |
|---|---|---|---|---|
|    |  |  |   |  |
| 1   | 2   | 3   | 4   | 5   |
|    |  |  |  |  |
| 6   | 7   | 8   | 9   | 10  |
|  |   |   |   |   |
| 11  |   |   |   |   |

### Parts List

| No. | Lvl. | Loc.  | Material Code | Description & Specification                  | SNA | Qty. |
|-----|------|-------|---------------|--|-----|------|
| 1   | 2    | M0047 | DC61-01736B   | HOLDER WIRE;<br>WF337AAW,PA6,T2.3,NATURAL,-, | SNA | 1    |
| 2   | 2    | W0616 | DC61-00133A   | CLAMPER HOSE-FIX;<br>P1291,PP,NATURAL,-,-,BJ | SNA | 2    |
| 3   | 4    | A0088 | DC61-02706A   | HOLDER HOSE;<br>WF210ANW,PA66,T2,NATURAL,-,- | SA  | 2    |
| 4   | 5    | W0616 | DC61-00118A   | CLAMP-CABLE;<br>P1291,PA66,NATURAL,-,-,101F, | SA  | 1    |
| 5   | 4    | M0001 | DC61-00553B   | CABLE CLAMP; DAWS-3NE,PA66,NTR               | SNA | 10   |
| 6   | 4    |       | DC66-10003A   | WIRE VINYL; SEW-100 JL,PVC,-                 | SNA | 0    |

| No. | Lvl. | Loc.  | Material Code | Description & Specification                  | SNA | Qty. |
|-----|------|-------|---------------|--|-----|------|
| 7   | 3    | U0363 | 6502-000168   | CABLE CLAMP;<br>DA-6N,PA66,NAT,T1.0,ID10.0   | SNA | 1    |
| 8   | 3    | A0354 | DC65-10001A   | CABLE TIE;<br>CT-140,NYLON66,NTR,T1.1,W3.5,L | SNA | 1    |
| 9   | 2    |       | DC61-00995A   | HOLDER WIRE;<br>DAWH,PA66,-,NATURAL,-,-,2110 | SA  | 2    |
| 10  | 3    |       | DC61-04622A   | HOLDER HOSE;<br>WW8800M,PA66,T2.5,NATURAL,A2 | SA  | 1    |
| 11  | 3    |       | DC61-03244A   | GUIDE HOSE;<br>WW-PC197CS,PP+TD30%,-,-,FC230 | SNA | 1    |